



- **Understanding Expansive Clay and Its Impact on Foundations**  
Understanding Expansive Clay and Its Impact on Foundations Examining Sandy Loam for Residential Support Identifying Areas Vulnerable to Soil Erosion Evaluating Soil Moisture Fluctuations Beneath Homes Approaches for Chemical Soil Stabilization Techniques for Addressing Soil Heave Issues Managing Settlement with Targeted Soil Compaction Recognizing Soil Drainage Limitations Investigating Soil Stress Testing in Residential Sites Incorporating Root Barriers to Prevent Shifts Examining Seasonal Swelling and Shrinking of Soil Employing Sustainable Methods for Long Term Soil Health
- **Planning French Drains for Effective Water Control**  
Planning French Drains for Effective Water Control Setting Up Sump Pumps to Prevent Basement Flooding Extending Gutter Downspouts for Extra Protection Excavation Basics for Residential Construction Projects Coordinating Soil Compaction Methods on Site Limiting Erosion Through Proper Grading Techniques Evaluating Perimeter Drain Systems for Dry Foundations Installing Exterior Waterproof Barriers for Walls Adapting Site Plans to Local Rainfall Patterns Understanding Swale Placement for Controlled Water Flow Enhancing Overall Site Drainage with Gravel Trenches Minimizing Subsurface Water Accumulation Around Foundations
- **About Us**



## **Explanation of how gravel trenches contribute to improved drainage systems.**

Certainly! French drains redirect water away from homes to prevent foundation damage **foundation repair service areas** entrance stairs. Let's delve into the topic of enhancing overall site drainage with gravel trenches, focusing on how these structures contribute to improved drainage systems.

Gravel trenches play a pivotal role in optimizing site drainage, serving as a natural and effective solution to manage water flow. At their core, gravel trenches are essentially excavated channels filled with gravel or similarly permeable materials. The primary function of these trenches is to facilitate the rapid movement of water away from areas where it might cause damage or inconvenience.

The effectiveness of gravel trenches in enhancing drainage can be attributed to several key factors. Firstly, the permeability of gravel allows water to infiltrate and percolate through the material quickly. This rapid infiltration reduces the likelihood of surface water pooling, which can lead to issues such as soil erosion, foundation damage, or even flooding in extreme cases. By providing a direct pathway for water to move through the ground, gravel trenches ensure that excess water is efficiently dispersed away from critical areas.

Moreover, gravel trenches contribute to improved drainage by enhancing the overall permeability of the site. When rainwater encounters a gravel-filled trench, it is immediately absorbed and directed downward, bypassing less permeable soil layers. This not only speeds up the drainage process but also helps to mitigate the impact of heavy rainfall events by reducing surface runoff. As a result, the risk of water-related problems is significantly diminished, leading to a more stable and resilient site.

Another important aspect of gravel trenches is their ability to complement other drainage solutions. They can be integrated into existing drainage systems, such as French drains or swales, to create a comprehensive network for managing water flow. This synergy allows for more efficient drainage across the site, ensuring that water is directed to appropriate outlets or retention areas where it can be safely stored or released.

In conclusion, gravel trenches are a valuable component in the enhancement of overall site drainage. Their ability to rapidly infiltrate and disperse water, improve site permeability, and integrate with other drainage solutions makes them an effective and sustainable choice for managing water flow. By incorporating gravel trenches into drainage strategies, property owners and landscape managers can significantly reduce the risk of water-related issues, ensuring a drier, safer, and more enjoyable environment for all.

**Step-by-step guide on assessing the current drainage issues around a residential foundation.**

Certainly!

When it comes to enhancing the overall site drainage around a residential foundation, one effective method is the installation of gravel trenches. However, before diving into any improvement project, it's crucial to assess the current drainage issues. Here's a step-by-step guide to help you evaluate the existing drainage problems around your home's foundation:

1. **\*\*Observation During Rainfall\*\***: The first step is to observe your property during and after a rainfall. Take note of any areas where water seems to pool or flow towards the foundation. This will give you a preliminary idea of where the drainage issues might be.
2. **\*\*Check the Grading\*\***: Proper grading is essential for effective drainage. Walk around your property and check if the ground slopes away from the foundation. If the slope is towards the house, water will naturally be directed towards the foundation, leading to potential issues.
3. **\*\*Inspect the Gutters and Downspouts\*\***: Clogged or misdirected gutters can contribute to foundation drainage problems. Ensure that your gutters are clean and that the downspouts direct water away from the foundation.
4. **\*\*Look for Signs of Water Intrusion\*\***: Check the basement or crawl space for any signs of moisture, mold, or musty odors. These can be indicators of water intrusion due to poor drainage.
5. **\*\*Evaluate the Soil Type\*\***: Different soil types drain at different rates. Clay soils, for instance, retain water and can lead to drainage issues. Knowing your soil type can help in determining the best drainage solution.
6. **\*\*Assess Plant and Tree Roots\*\***: Large trees or dense plant roots can disrupt the natural flow of water and even damage drainage systems. Take note of any such vegetation close to the foundation.
7. **\*\*Professional Evaluation\*\***: If you're unsure about any of the above steps or if the drainage issues seem severe, it might be beneficial to consult with a professional drainage expert. They can provide a more detailed assessment and recommend the best solutions.

By following this guide, you'll be well-equipped to identify the current drainage issues around your residential foundation. Once assessed, you can then consider solutions like gravel trenches to enhance the overall site drainage and protect your home's foundation.

**Detailed instructions for designing an effective gravel trench layout tailored to specific residential properties.**

Designing an effective gravel trench layout for enhancing overall site drainage in residential properties involves several critical steps, tailored to the unique topography and drainage needs of each site. Here's a detailed guide to help navigate the process:

1. **\*\*Assess the Site\*\***: Start by conducting a thorough site analysis. Identify the natural slope, existing drainage patterns, and areas prone to water accumulation. This assessment will help determine the optimal location for the gravel trenches.
2. **\*\*Determine Trench Dimensions\*\***: The size and depth of the trenches depend on the volume of water they need to manage. Typically, trenches should be at least 12 inches wide and 18-24 inches deep to ensure adequate capacity. Deeper trenches may be necessary in areas with heavy rainfall or poor soil drainage.
3. **\*\*Select Appropriate Gravel\*\***: Choose clean, angular gravel with a size of 3/4 inch to 1 inch. This type of gravel ensures good permeability and stability. Avoid rounded gravel, as it can compact over time and reduce the trench's effectiveness.
4. **\*\*Plan the Trench Layout\*\***: Design the trench layout to direct water away from the house and other structures. Use a slope of at least 1% to ensure gravity aids in drainage. Consider incorporating multiple trenches in a herringbone pattern for larger properties to maximize water dispersal.
5. **\*\*Incorporate Perforated Pipes\*\***: Install perforated pipes within the trenches to facilitate faster water movement. Ensure the pipes are laid on a bed of smaller gravel to prevent clogging and allow water to enter the pipes freely.
6. **\*\*Use Geotextile Fabric\*\***: Line the trenches with geotextile fabric to prevent soil from mixing with the gravel. This fabric allows water to pass through while keeping the gravel clean and maintaining its permeability.
7. **\*\*Backfill and Compact\*\***: After placing the gravel and pipes, backfill the trenches with the original soil. Compact the soil gently to avoid displacing the gravel but ensure the surface is level and stable.
8. **\*\*Monitor and Maintain\*\***: Regularly inspect the gravel trenches for any signs of clogging or displacement. Clear any debris that may accumulate on the surface to maintain optimal functionality.

By following these detailed instructions, homeowners can create an effective gravel trench system tailored to their specific property, significantly enhancing site drainage and protecting their investment from water-related damage.

**Overview of the materials and tools required for constructing gravel trenches.**

Certainly! When it comes to enhancing overall site drainage with gravel trenches, understanding the materials and tools required is crucial for a successful project. Let's delve into what you'll need.

Firstly, the primary material for gravel trenches is, unsurprisingly, gravel. Opt for clean, angular gravel with a size that ensures good drainage yet prevents soil from washing into the trench. A common choice is 3/4 inch gravel. It's also beneficial to line the trench with a geotextile fabric. This fabric allows water to pass through while preventing soil migration into the gravel, ensuring the trench remains effective over time.

In terms of tools, you'll need a shovel for digging the trench. A spade with a sharp edge works best for clean cuts. Depending on the size of the area, a trenching machine might be a wise investment to save time and labor. A tamper will be useful to compact the gravel once it's in place, ensuring a stable and effective drainage system. Don't forget safety gear such as gloves and eye protection, especially if you're using machinery.

Lastly, consider the layout and design of your gravel trench. This will influence the quantity of materials you'll need. A well-planned design, taking into account the natural slope of the land and the areas most affected by water accumulation, will maximize the efficiency of your drainage system.

In summary, constructing gravel trenches for enhanced site drainage involves selecting the right type of gravel, using geotextile fabric for lining, and employing appropriate tools like shovels, possibly a trenching machine, and a tamper. Safety and careful planning are also key components of a successful project.

### **Comprehensive walkthrough of the gravel trench installation process, including excavation, gravel placement, and compaction techniques.**

Sure, here's a comprehensive walkthrough of the gravel trench installation process aimed at enhancing overall site drainage:

---

When it comes to improving site drainage, gravel trenches are a highly effective solution. They help redirect water away from problem areas, reducing the risk of flooding, erosion, and structural damage. Let's dive into a step-by-step guide on how to install gravel trenches, covering excavation, gravel placement, and compaction techniques.

#### **\*\*1. Planning and Design\*\***

Before you start digging, it's crucial to plan your gravel trench system. Identify the areas with poor drainage and determine the best route for the trenches. Consider the natural slope of the land and where water tends to accumulate. Design your trenches to direct water towards a suitable discharge point, such as a storm drain or a dry well.

## **\*\*2. Excavation\*\***

Once your design is ready, it's time to excavate the trenches. Use a shovel or a trenching machine to dig trenches that are typically 12 to 18 inches wide and 18 to 24 inches deep. The depth and width may vary depending on the specific drainage needs of your site. Ensure that the trenches have a consistent slope, usually about 1% grade, to facilitate proper water flow.

## **\*\*3. Preparing the Trench\*\***

After excavation, it's important to prepare the trench for gravel placement. Remove any roots, rocks, or debris that could impede water flow. You may also want to line the bottom of the trench with a geotextile fabric. This fabric allows water to permeate while preventing soil from mixing with the gravel, which can reduce the effectiveness of the trench over time.

## **\*\*4. Gravel Placement\*\***

Now, it's time to fill the trench with gravel. Use clean, angular gravel with a size of 3/4 inch to 1-1/2 inches. Start by placing a layer of gravel at the bottom of the trench, about 6 inches thick. This initial layer should be compacted using a plate compactor or a jumping jack to ensure stability.

## **\*\*5. Continuing Gravel Layers\*\***

Add subsequent layers of gravel, compacting each layer thoroughly before adding the next. This process ensures that the trench remains permeable and can handle the volume of water it's designed to manage. Continue until the trench is filled to the desired level, usually just below the surface to avoid disrupting the landscape.

## **\*\*6. Final Compaction\*\***

Once the trench is filled with gravel, give the entire area a final compaction. This step is crucial as it ensures that the gravel settles properly and creates a stable, permeable structure. Walk over the compacted gravel to check for any soft spots and add more gravel if necessary.

## **\*\*7. Backfilling and Landscape Restoration\*\***

After compaction, you can backfill the trench with topsoil, leaving a slight depression to allow for water collection. Replace any plants or sod that were removed during excavation. Water the area gently to help the soil settle.

## **\*\*8. Maintenance\*\***

Regular maintenance is key to ensuring the longevity and effectiveness of your gravel trenches. Check for any blockages or compaction issues and clear away any debris that may accumulate.

By following these steps, you can effectively install gravel trenches to enhance your site's drainage, protecting your property from water-related issues and promoting a healthier landscape.

## **Maintenance tips for ensuring the longevity and effectiveness of gravel trenches in residential drainage systems.**

Certainly! Here's a human-like essay on maintenance tips for ensuring the longevity and effectiveness of gravel trenches in residential drainage systems:

---

Maintaining gravel trenches in residential drainage systems is crucial for ensuring they remain effective and long-lasting. These trenches play a vital role in managing water flow and preventing issues like flooding and soil erosion. Here are some practical maintenance tips to keep your gravel trenches in top condition.

Firstly, regular inspections are key. Take the time to check your gravel trenches at least once a season. Look for any signs of clogging, such as standing water or reduced water flow. Early detection of issues can prevent more significant problems down the line.

Secondly, keep the area around the trenches clear of debris. Leaves, twigs, and other organic matter can accumulate and block the gravel, hindering its drainage capabilities. Use a rake or a leaf blower to clean the area periodically.

Thirdly, consider the vegetation near your gravel trenches. While plants can be beneficial for stabilizing the soil, overgrown roots can invade the trenches and cause blockages. Trim back any invasive roots and avoid planting large shrubs or trees too close to the trenches.

Fourthly, ensure that the gravel itself remains clean and free-flowing. Over time, smaller particles can wash into the trench and reduce its effectiveness. If you notice a significant buildup of fine sediments, it may be necessary to flush the trench or replace the gravel.

Lastly, pay attention to the overall landscape. Ensure that the ground slopes away from your home and towards the gravel trenches. This design helps channel water into the trenches more effectively. If you notice any changes in the landscape that could affect water flow, make adjustments as needed.

In conclusion, maintaining gravel trenches in residential drainage systems requires a bit of effort, but the results are well worth it. Regular inspections, clearing debris, managing vegetation, keeping the gravel clean, and monitoring the landscape are all essential practices. By following these tips, you can ensure that your gravel trenches continue to provide effective drainage, protecting your property and enhancing the overall site drainage.

## **Case studies or examples showcasing successful residential foundation repair projects that incorporated gravel trenches for enhanced drainage.**

Sure, here's a short essay on the topic:

## Enhancing Overall Site Drainage with Gravel Trenches: Case Studies and Examples

Incorporating gravel trenches in residential foundation repair projects has proven to be a successful strategy for enhancing overall site drainage. This method not only addresses existing issues but also provides a long-term solution to prevent future problems. Let's explore a few case studies that showcase the effectiveness of this approach.

### Case Study 1: The Suburban Home Renovation

In a suburban neighborhood, a homeowner noticed cracks in their foundation and damp basement walls. After a thorough inspection, it was determined that poor drainage was the primary cause. The solution involved excavating trenches around the foundation and filling them with gravel. This created a network of channels that directed water away from the house. Post-repair, the homeowner reported a significant reduction in moisture levels and no further foundation issues, highlighting the success of the gravel trench method.

### Case Study 2: The Hillside House

A house built on a hillside faced severe foundation problems due to water accumulation. The repair team decided to implement a comprehensive drainage system that included gravel trenches. These trenches were strategically placed to capture and redirect water flow away from the foundation. Additionally, perforated pipes were installed within the trenches to enhance water movement. The result was a dry basement and a stable foundation, even during heavy rains.


### Case Study 3: The Urban Townhouse

In an urban setting, a townhouse complex experienced foundation settling due to inadequate drainage. The repair project involved creating gravel trenches along the perimeter of the buildings. These trenches were connected to a main drainage line that led to a storm sewer. The intervention not only stabilized the foundations but also improved the overall aesthetics of the property by reducing waterlogging in the surrounding areas.


These case studies demonstrate the effectiveness of gravel trenches in enhancing site drainage and resolving foundation issues. By providing a clear path for water to move away from the foundation, this method ensures long-lasting stability and prevents future drainage-related problems. Homeowners and contractors alike can draw inspiration from these successful projects when faced with similar challenges.

## About concrete slab



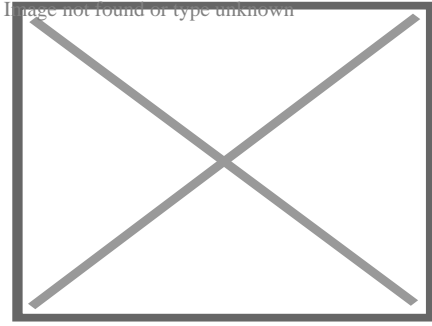

Suspended slab under construction, with the formwork still in place

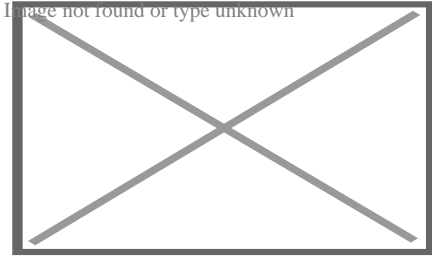

Suspended slab formwork and rebar in place, ready for concrete pour.

A **concrete slab** is a common structural element of modern buildings, consisting of a flat, horizontal surface made of cast concrete. Steel-reinforced slabs, typically between 100 and 500 mm thick, are most often used to construct floors and ceilings, while thinner *mud slabs* may be used for exterior paving ( see below).<sup>[1][2]</sup>

In many domestic and industrial buildings, a thick concrete slab supported on foundations or directly on the subsoil, is used to construct the ground floor. These slabs are generally classified as *ground-bearing* or *suspended*. A slab is ground-bearing if it rests directly on the foundation, otherwise the slab is suspended.<sup>[3]</sup> For multi-story buildings, there are several common slab designs (

see § Design for more types):

- Beam and block, also referred to as *rib and block*, is mostly used in residential and industrial applications. This slab type is made up of pre-stressed beams and hollow blocks and are temporarily propped until set, typically after 21 days.<sup>[4]</sup>
- A hollow core slab which is precast and installed on site with a crane
- In high rise buildings and skyscrapers, thinner, pre-cast concrete slabs are slung between the steel frames to form the floors and ceilings on each level. Cast in-situ slabs are used in high rise buildings and large shopping complexes as well as houses. These in-situ slabs are cast on site using shutters and reinforced steel.

On technical drawings, reinforced concrete slabs are often abbreviated to "r.c.c. slab" or simply "r.c.". Calculations and drawings are often done by structural engineers in CAD software.

## Thermal performance

[edit]

Energy efficiency has become a primary concern for the construction of new buildings, and the prevalence of concrete slabs calls for careful consideration of its thermal properties in order to minimise wasted energy.<sup>[5]</sup> Concrete has similar thermal properties to masonry products, in that it has a relatively high thermal mass and is a good conductor of heat.

In some special cases, the thermal properties of concrete have been employed, for example as a heatsink in nuclear power plants or a thermal buffer in industrial freezers.<sup>[6]</sup>

## Thermal conductivity

[edit]

Thermal conductivity of a concrete slab indicates the rate of heat transfer through the solid mass by conduction, usually in regard to heat transfer to or from the ground. The coefficient of thermal conductivity,  $k$ , is proportional to density of the concrete, among other factors.<sup>[5]</sup> The primary influences on conductivity are moisture content, type of aggregate, type of cement, constituent proportions, and temperature. These various factors complicate the theoretical evaluation of a  $k$ -value, since each component has a different conductivity when isolated, and the position and proportion of each components affects the overall conductivity. To simplify this, particles of aggregate may be considered to be suspended in the homogeneous cement. Campbell-Allen and Thorne (1963) derived a formula for the theoretical thermal conductivity of concrete.<sup>[6]</sup> In practice this formula is rarely applied, but remains relevant for theoretical use. Subsequently, Valore (1980) developed another formula in terms of overall density.<sup>[7]</sup> However, this study concerned hollow concrete blocks and its results are unverified for concrete slabs.

The actual value of  $k$  varies significantly in practice, and is usually between  $0.8$  and  $2.0 \text{ W m}^{-1} \text{ K}^{-1}$ .<sup>[8]</sup> This is relatively high when compared to other materials, for example the conductivity of wood may be as low as  $0.04 \text{ W m}^{-1} \text{ K}^{-1}$ . One way of mitigating the effects of thermal conduction is to introduce insulation (

see § Insulation).

## Thermal mass

[edit]

The second consideration is the high thermal mass of concrete slabs, which applies similarly to walls and floors, or wherever concrete is used within the thermal envelope. Concrete has a

relatively high thermal mass, meaning that it takes a long time to respond to changes in ambient temperature.<sup>[9]</sup> This is a disadvantage when rooms are heated intermittently and require a quick response, as it takes longer to warm the entire building, including the slab. However, the high thermal mass is an advantage in climates with large daily temperature swings, where the slab acts as a regulator, keeping the building cool by day and warm by night.

Typically concrete slabs perform better than implied by their R-value.<sup>[5]</sup> The R-value does not consider thermal mass, since it is tested under constant temperature conditions. Thus, when a concrete slab is subjected to fluctuating temperatures, it will respond more slowly to these changes and in many cases increase the efficiency of a building.<sup>[5]</sup> In reality, there are many factors which contribute to the effect of thermal mass, including the depth and composition of the slab, as well as other properties of the building such as orientation and windows.

Thermal mass is also related to thermal diffusivity, heat capacity and insulation. Concrete has low thermal diffusivity, high heat capacity, and its thermal mass is negatively affected by insulation (e.g. carpet).<sup>[5]</sup>


## Insulation

[edit]


Without insulation, concrete slabs cast directly on the ground can cause a significant amount of extraneous energy transfer by conduction, resulting in either lost heat or unwanted heat. In modern construction, concrete slabs are usually cast above a layer of insulation such as expanded polystyrene, and the slab may contain underfloor heating pipes.<sup>[10]</sup> However, there are still uses for a slab that is not insulated, for example in outbuildings which are not heated or cooled to room temperature (

see § Mud slabs). In these cases, casting the slab directly onto a substrate of aggregate will maintain the slab near the temperature of the substrate throughout the year, and can prevent both freezing and overheating.

A common type of insulated slab is the beam and block system (mentioned above) which is modified by replacing concrete blocks with expanded polystyrene blocks.<sup>[11]</sup> This not only allows for better insulation but decreases the weight of slab which has a positive effect on load bearing walls and foundations.

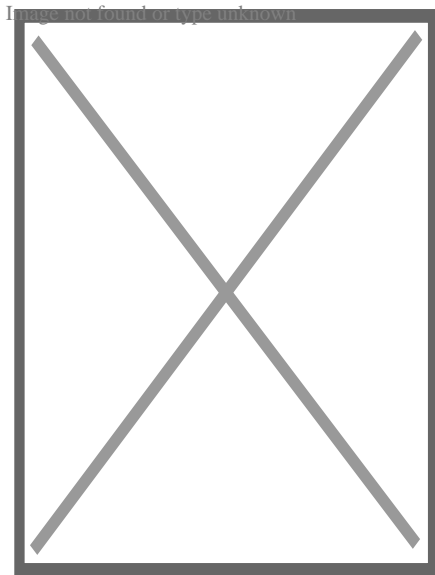

Formwork set for concrete pour.

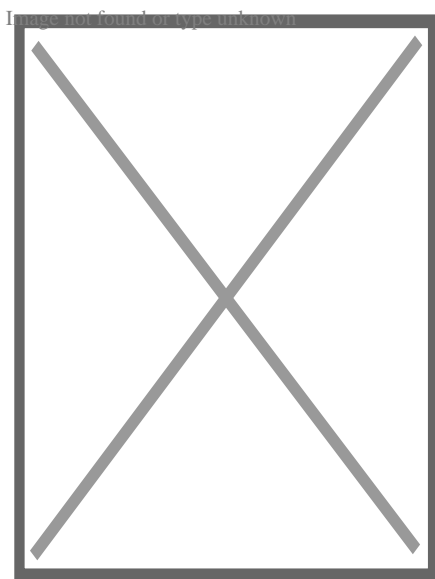

Concrete poured into formwork. This slab is ground-bearing and reinforced with steel rebar.

## Design

[edit]

Further information: Marcus' method

## Ground-bearing slabs

[edit]

See also: Shallow foundation § Slab on grade

Ground-bearing slabs, also known as "on-ground" or "slab-on-grade", are commonly used for ground floors on domestic and some commercial applications. It is an economical and quick construction method for sites that have non-reactive soil and little slope.<sup>[12]</sup>

For ground-bearing slabs, it is important to design the slab around the type of soil, since some soils such as clay are too dynamic to support a slab consistently across its entire area. This results in cracking and deformation, potentially leading to structural failure of any members attached to the floor, such as wall studs.<sup>[12]</sup>

Levelling the site before pouring concrete is an important step, as sloping ground will cause the concrete to cure unevenly and will result in differential expansion. In some cases, a naturally sloping site may be levelled simply by removing soil from the uphill site. If a site has a more significant grade, it may be a candidate for the "cut and fill" method, where soil from the higher ground is removed, and the lower ground is built up with fill.<sup>[13]</sup>

In addition to filling the downhill side, this area of the slab may be supported on concrete piers which extend into the ground. In this case, the fill material is less important structurally as the dead weight of the slab is supported by the piers. However, the fill material is still necessary to support the curing concrete and its reinforcement.

There are two common methods of filling - *controlled fill* and *rolled fill*.<sup>[13]</sup>

- **Controlled fill:** Fill material is compacted in several layers by a vibrating plate or roller. Sand fills areas up to around 800 mm deep, and clay may be used to fill areas up to 400 mm deep. However, clay is much more reactive than sand, so it should be used sparingly and carefully. Clay must be moist during compaction to homogenise it.<sup>[13]</sup>
- **Rolled fill:** Fill is repeatedly compacted by an excavator, but this method of compaction is less effective than a vibrator or roller. Thus, the regulations on maximum depth are typically stricter.

Proper curing of ground-bearing concrete is necessary to obtain adequate strength. Since these slabs are inevitably poured on-site (rather than precast as some suspended slabs are), it can be difficult to control conditions to optimize the curing process. This is usually aided by a membrane, either plastic (temporary) or a liquid compound (permanent).<sup>[14]</sup>

Ground-bearing slabs are usually supplemented with some form of reinforcement, often steel rebar. However, in some cases such as concrete roads, it is acceptable to use an unreinforced slab if it is adequately engineered (


see below).

## Suspended slabs

[edit]

For a suspended slab, there are a number of designs to improve the strength-to-weight ratio. In all cases the top surface remains flat, and the underside is modulated:

- A *corrugated slab* is designed when the concrete is poured into a corrugated steel tray, more commonly called decking. This steel tray improves strength of the slab, and prevents the slab from bending under its own weight. The corrugations run in one direction only.
- A *ribbed slab* gives considerably more strength in one direction. This is achieved with concrete beams bearing load between piers or columns, and thinner, integral ribs in the perpendicular direction. An analogy in carpentry would be a subfloor of bearers and joists. Ribbed slabs have higher load ratings than corrugated or flat slabs, but are inferior to waffle slabs.<sup>[15]</sup>
- A *waffle slab* gives added strength in both directions using a matrix of recessed segments beneath the slab.<sup>[16]</sup> This is the same principle used in the ground-bearing version, the waffle slab foundation. Waffle slabs are usually deeper than ribbed slabs of equivalent strength, and are heavier hence require stronger foundations. However, they provide increased mechanical strength in two dimensions, a characteristic important for vibration resistance and soil movement.<sup>[17]</sup>

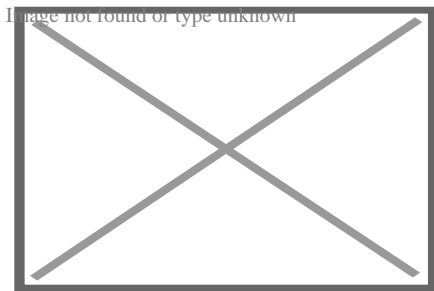

The exposed underside of a waffle slab used in a multi-storey building

## Unreinforced slabs

[edit]


Unreinforced or "plain"<sup>[18]</sup> slabs are becoming rare and have limited practical applications, with one exception being the mud slab (

see below). They were once common in the US, but the economic value of reinforced ground-bearing slabs has become more appealing for many engineers.<sup>[10]</sup> Without reinforcement, the entire load on these slabs is supported by the strength of the concrete, which becomes a vital factor. As a result, any stress induced by a load, static or dynamic, must be within the limit of the concrete's flexural strength to prevent cracking.<sup>[19]</sup> Since unreinforced concrete is relatively very weak in tension, it is important to consider the effects of tensile stress caused by reactive soil, wind uplift, thermal expansion, and cracking.<sup>[20]</sup> One of the most common applications for unreinforced slabs is in concrete roads.

## Mud slabs

[edit]

Mud slabs, also known as *rat slabs*, are thinner than the more common suspended or ground-bearing slabs (usually 50 to 150 mm), and usually contain no reinforcement.<sup>[21]</sup> This makes them economical and easy to install for temporary or low-usage purposes such as subfloors, crawlspaces, pathways, paving, and levelling surfaces.<sup>[22]</sup> In general, they may be used for any application which requires a flat, clean surface. This includes use as a base or "sub-slab" for a larger structural slab. On uneven or steep surfaces, this preparatory measure is necessary to provide a flat surface on which to install rebar and waterproofing membranes.<sup>[10]</sup> In this application, a mud slab also prevents the plastic bar chairs from sinking into soft topsoil which can cause spalling due to incomplete coverage of the steel. Sometimes a mud slab may be a substitute for coarse aggregate. Mud slabs typically have a moderately rough surface, finished with a float.<sup>[10]</sup>

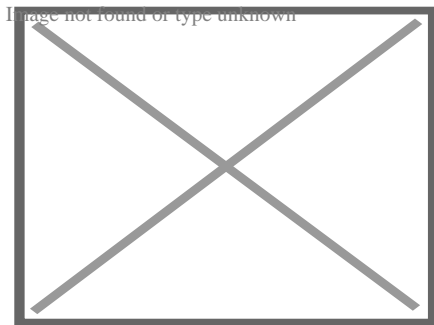

Substrate and rebar prepared for pouring a mud slab

## Axes of support

[edit]

## One-way slabs

[edit]

A *one-way slab* has moment-resisting reinforcement only in its short axis, and is used when the moment in the long axis is negligible.<sup>[23]</sup> Such designs include corrugated slabs and ribbed slabs. Non-reinforced slabs may also be considered one-way if they are supported on only two opposite sides (i.e. they are supported in one axis). A one-way reinforced slab may be stronger than a two-way non-reinforced slab, depending on the type of load.

The calculation of reinforcement requirements for a one-way slab can be extremely tedious and time-consuming, and one can never be completely certain of the best design.<sup>[citation needed]</sup> Even minor changes to the project can necessitate recalculation of the reinforcement

requirements. There are many factors to consider during the structural structure design of one-way slabs, including:

- Load calculations
- Bending moment calculation
- Acceptable depth of flexure and deflection
- Type and distribution of reinforcing steel

## Two-way slabs

[edit]

A *two-way slab* has moment resisting reinforcement in both directions.<sup>[24]</sup> This may be implemented due to application requirements such as heavy loading, vibration resistance, clearance below the slab, or other factors. However, an important characteristic governing the requirement of a two-way slab is the ratio of the two horizontal lengths. If  $l_x$  is the short dimension and  $l_y$  is the long dimension, then moment in both directions should be considered in design.<sup>[25]</sup> In other words, if the axial ratio is greater than two, a two-way slab is required.

A non-reinforced slab is two-way if it is supported in both horizontal axes.

## Construction

[edit]

A concrete slab may be prefabricated (precast), or constructed on site.

## Prefabricated

[edit]

Prefabricated concrete slabs are built in a factory and transported to the site, ready to be lowered into place between steel or concrete beams. They may be pre-stressed (in the factory), post-stressed (on site), or unstressed.<sup>[10]</sup> It is vital that the wall supporting structure is built to the correct dimensions, or the slabs may not fit.

## On-site

[edit]



On-site concrete slabs are built on the building site using formwork, a type of boxing into which the wet concrete is poured. If the slab is to be reinforced, the rebars, or metal bars, are positioned within the formwork before the concrete is poured in.<sup>[26]</sup> Plastic-tipped metal or plastic bar chairs, are used to hold the rebar away from the bottom and sides of the form-work, so that when the concrete sets it completely envelops the reinforcement. This concept is known as concrete cover. For a ground-bearing slab, the formwork may consist only of side walls pushed into the ground. For a suspended slab, the formwork is shaped like a tray, often supported by a temporary scaffold until the concrete sets.

The formwork is commonly built from wooden planks and boards, plastic, or steel. On commercial building sites, plastic and steel are gaining popularity as they save labour.<sup>[27]</sup> On low-budget or small-scale jobs, for instance when laying a concrete garden path, wooden planks are very common. After the concrete has set the wood may be removed.

Formwork can also be permanent, and remain in situ post concrete pour. For large slabs or paths that are poured in sections, this permanent formwork can then also act as isolation joints within concrete slabs to reduce the potential for cracking due to concrete expansion or movement.

In some cases formwork is not necessary. For instance, a ground slab surrounded by dense soil, brick or block foundation walls, where the walls act as the sides of the tray and hardcore (rubble) acts as the base.

## See also

[edit]

- Shallow foundation (Commonly used for ground-bearing slabs)
- Hollow-core slab (Voided slab, one-way spanning)
- Beam and block (voided slab, one way spanning)
- Voided biaxial slab (Voided slab, two-way spanning)
- Formwork
- Precast concrete
- Reinforced concrete
- Rebar
- Concrete cover

## References

[edit]

1. ^ Garber, G. Design and Construction of Concrete Floors. 2nd ed. Amsterdam: Butterworth-Heinemann, 2006. 47. Print.

2. ^ Duncan, Chester I. *Soils and Foundations for Architects and Engineers*. New York: Van Nostrand Reinhold, 1992. 299. Print.
3. ^ "Ground slabs - Introduction". [www.dlsweb.rmit.edu.au](http://www.dlsweb.rmit.edu.au). Archived from the original on 2019-11-18. Retrieved 2017-12-07.
4. ^ "What is a rib and block slab?". [www.royalconcreteslabs.co.za](http://www.royalconcreteslabs.co.za). Royal concrete slabs.
5. ^ **a b c d e** Cavanaugh, Kevin; et al. (2002). *Guide to Thermal Properties of Concrete and Masonry Systems: Reported by ACI Committee 122*. American Concrete Institute.
6. ^ **a b** Campbell-Allen, D.; Thorne, C.P. (March 1963). "The thermal conductivity of concrete". *Magazine of Concrete Research*. **15** (43): 39–48. doi:10.1680/mac.1963.15.43.39. UDC 691.32.001:536.21:691.322.
7. ^ Valore, R.C. Jr. (February 1980). "Calculation of U-values of Hollow Concrete Masonry". *Concrete International*. **2**: 40–63.
8. ^ Young, Hugh D. (1992). "Table 15.5". *University Physics* (7th ed.). Addison Wesley. ISBN 0201529815.
9. ^ Sabnis, Gajanan M.; Juhl, William (2016). "Chapter 4: Sustainability through Thermal Mass of Concrete". *Green Building with Concrete: Sustainable Design and Construction* (2nd ed.). Taylor & Francis Group. ISBN 978-1-4987-0411-3.
10. ^ **a b c d e** Garber, George (2006). *Design and Construction of Concrete Floors* (2nd ed.). Amsterdam: Butterworth-Heinemann. ISBN 978-0-7506-6656-5.
11. ^ "What is a polystyrene concrete slab?". [www.royalconcreteslabs.co.za](http://www.royalconcreteslabs.co.za). Royal concrete slabs.
12. ^ **a b** McKinney, Arthur W.; et al. (2006). *Design of Slabs-on-Ground: Reported by ACI Committee 360* (PDF). American Concrete Institute. Archived from the original (PDF) on 2021-05-08. Retrieved 2019-04-04.
13. ^ **a b c** Staines, Allan (2014). *The Australian House Building Manual*. Pinedale Press. pp. 40–41. ISBN 978-1-875217-07-6.
14. ^ "Concrete in Practice 11 - Curing In-Place Concrete" (PDF). Engineering.com. National Ready Mixed Concrete Association. Archived from the original (PDF) on 4 April 2019. Retrieved 4 April 2019.
15. ^ "Ribbed Slabs Datasheet" (PDF). Kaset Kalip. Archived from the original (PDF) on 29 March 2018. Retrieved 4 April 2019.
16. ^ "Ribbed and waffle slabs". [www.concretecentre.com](http://www.concretecentre.com). Retrieved 2019-04-04.
17. ^ *Concrete Framed Buildings: A Guide to Design and Construction*. MPA The Concrete Centre. 2016. ISBN 978-1-904818-40-3.
18. ^ Garrison, Tim (19 February 2014). "Clearing the confusion on 'plain concrete'". *Civil & Structural Engineer*. Archived from the original on 8 May 2019. Retrieved 8 May 2019.
19. ^ Walker, Wayne. "Reinforcement for slabs on ground". *Concrete Construction*. Retrieved 8 May 2019.
20. ^ "Rupture depth of an unreinforced concrete slab on grade" (PDF). Aluminium Association of Florida, Inc. Archived from the original (PDF) on 2020-09-26. Retrieved 2019-05-08.
21. ^ Arcoma, Peter. "What is a mud slab?". *Builder-Questions.com*. Retrieved 8 May 2019.
22. ^ Postma, Mark; et al. "Floor Slabs". *Whole Building Design Guide*. National Institute of Building Sciences. Retrieved 8 May 2019.

23. ^ Gilbert, R. I. (1980). *UNICIV Report 211 (PDF)*. University of New South Wales.
24. ^ Prieto-Portar, L. A. (2008). *EGN-5439 The Design of Tall Buildings; Lecture #14: The Design of Reinforced Concrete Slabs (PDF)*. Archived from the original (PDF) on 2017-08-29. Retrieved 2019-04-04.
25. ^ "What is the difference between one way and two way slab?". *Basic Civil Engineering*. 16 June 2019. Retrieved 8 July 2019.
26. ^ *Concrete Basics: A Guide to Concrete Practice* (6th ed.). Cement Concrete & Aggregates Australia. 2004. p. 53.
27. ^ Nemati, Kamran M. (2005). "Temporary Structures: Formwork for Concrete" (PDF). *Tokyo Institute of Technology*. Archived from the original (PDF) on 12 July 2018. Retrieved 4 April 2019.

## External links

[edit]



image not found or type unknown

Wikimedia Commons has media related to **Concrete slabs**.

- *Concrete Basics: A Guide to Concrete Practice*
- *Super Insulated Slab Foundations*
- *Design of Slabs on Ground* Archived 2021-05-08 at the Wayback Machine

- v
- t
- e

Concrete

## History

- Ancient Roman architecture
- Roman architectural revolution
- Roman concrete
- Roman engineering
- Roman technology

<b>Composition</b>	<ul style="list-style-type: none"> <li>○ Cement <ul style="list-style-type: none"> <li>○ Calcium aluminate</li> <li>○ Energetically modified</li> <li>○ Portland</li> <li>○ Rosendale</li> </ul> </li> <li>○ Water</li> <li>○ Water–cement ratio</li> <li>○ Aggregate</li> <li>○ Reinforcement</li> <li>○ Fly ash</li> <li>○ Ground granulated blast-furnace slag</li> <li>○ Silica fume</li> <li>○ Metakaolin</li> </ul>
<b>Production</b>	<ul style="list-style-type: none"> <li>○ Plant</li> <li>○ Concrete mixer</li> <li>○ Volumetric mixer</li> <li>○ Reversing drum mixer</li> <li>○ Slump test</li> <li>○ Flow table test</li> <li>○ Curing</li> <li>○ Concrete cover</li> <li>○ Cover meter</li> <li>○ Rebar</li> </ul>
<b>Construction</b>	<ul style="list-style-type: none"> <li>○ Precast</li> <li>○ Cast-in-place</li> <li>○ Formwork</li> <li>○ Climbing formwork</li> <li>○ Slip forming</li> <li>○ Screed</li> <li>○ Power screed</li> <li>○ Finisher</li> <li>○ Grinder</li> <li>○ Power trowel</li> <li>○ Pump</li> <li>○ Float</li> <li>○ Sealer</li> <li>○ Tremie</li> </ul>

## **Science**

- Properties
- Durability
- Degradation
- Environmental impact
- Recycling
- Segregation
- Alkali–silica reaction

## **Types**

- AstroCrete
- Fiber-reinforced
- Filigree
- Foam
- Lunacrete
- Mass
- Nanoconcrete
- Pervious
- Polished
- Polymer
- Prestressed
- Ready-mix
- Reinforced
- Roller-compacting
- Self-consolidating
- Self-leveling
- Sulfur
- Tabby
- Translucent
- Waste light
- Aerated
  - AAC
  - RAAC

## **Applications**

- Slab
  - waffle
  - hollow-core
  - voided biaxial
  - slab on grade
- Concrete block
- Step barrier
- Roads
- Columns
- Structures

## Organizations

- American Concrete Institute
- Concrete Society
- Institution of Structural Engineers
- Indian Concrete Institute
- Nanocem
- Portland Cement Association
- International Federation for Structural Concrete

## Standards

- Eurocode 2
- EN 197-1
- EN 206-1
- EN 10080

## See also

- Hempcrete


-  Category:Concrete

## About home inspection

This article **uses bare URLs, which are uninformative and vulnerable to link rot.**



**Please consider** converting them to full citations to ensure the article remains verifiable and maintains a consistent citation style. Several templates and tools are available to assist in formatting, such as reFill (documentation) and Citation bot (documentation). (August 2022) *(Learn how and when to remove this message)*

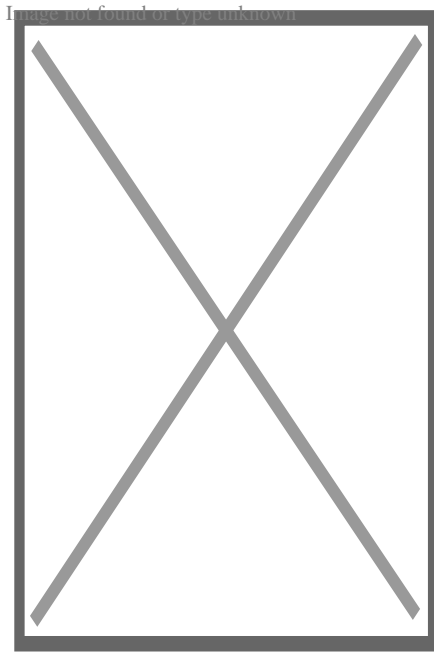

A disaster inspector at work in the United States assessing tornado damage to a house

A **home inspection** is a limited, non-invasive examination of the condition of a home, often in connection with the sale of that home. Home inspections are usually conducted by a **home inspector** who has the training and certifications to perform such inspections. The inspector prepares and delivers to the client a written report of findings. In general, home inspectors recommend that potential purchasers join them during their onsite visits to provide context for the comments in their written reports. The client then uses the knowledge gained to make informed decisions about their pending real estate purchase. The home inspector describes the condition of the home at the time of inspection but does not guarantee future condition, efficiency, or life expectancy of systems or components.

Sometimes confused with a real estate appraiser, a home inspector determines the condition of a structure, whereas an appraiser determines the value of a property. In the United States, although not all states or municipalities regulate home inspectors, there are various professional associations for home inspectors that provide education, training, and networking opportunities. A professional home inspection is an examination of the current condition of a house. It is not an inspection to verify compliance with appropriate codes; building inspection is a term often used for building code compliance inspections in the United States. A similar but more complicated inspection of commercial buildings is a property condition assessment. Home inspections identify problems but building diagnostics identifies solutions to the found problems and their predicted outcomes. A property inspection is a detailed visual documentation of a property's structures, design, and fixtures. Property Inspection provides a buyer, renter, or other information consumer with valuable insight into the property's conditions prior to purchase. House-hunting can be a difficult task especially when you can't seem to find one that you like. The best way to get things done is to ensure that there is a property inspection before buying a property.

## North America

[edit]

In Canada and the United States, a contract to purchase a house may include a contingency that the contract is not valid until the buyer, through a home inspector or other agents, has had an opportunity to verify the condition of the property. In many states and provinces, home inspectors are required to be licensed, but in some states, the profession is not regulated. Typical requirements for obtaining a license are the completion of an approved training course and/or a successful examination by the state's licensing board. Several states and provinces also require inspectors to periodically obtain continuing education credits in order to renew their licenses.<sup>[*citation needed*]</sup> Unless specifically advertised as part of the home inspection, items often needed to satisfy mortgage or title requirements such as termite ("pest") inspections must be obtained separately from licensed and regulated companies.

In May 2001, Massachusetts became the first state to recognize the potential conflict of interest when real estate agents selling a home also refer or recommend the home inspector to the potential buyer.<sup>[*citation needed*]</sup> As a result, the real estate licensing law in Massachusetts was amended<sup>[<sup>1</sup>]</sup><sup>[*non-primary source needed*]</sup> to prohibit listing real estate agents from directly referring home inspectors. The law also prohibits listing agents from giving out a "short" name list of inspectors. The only list that can be given out is the complete list of all licensed home inspectors in the state.

In September 2018, the California state legislature passed Senate Bill 721 (SB 721),<sup>[<sup>2</sup>]</sup> which requires buildings with specific conditions, such as having exterior elevated structures, to undergo inspections by licensed professionals. These inspections must be conducted by qualified individuals, such as structural engineering firms,<sup>[<sup>3</sup>]</sup> and a detailed report must be issued. Failure to comply with these requirements can result in penalties for property owners.

Ancillary services such as inspections for wood destroying insects, radon testing, septic tank inspections, water quality, mold, (or excessive moisture which may lead to mold), and private well inspections are sometimes part of home inspector's services if duly qualified.

In many provinces and states, home inspection standards are developed and enforced by professional associations, such as, worldwide, the International Association of Certified Home Inspectors (InterNACHI); in the United States, the American Society of Home Inspectors (ASHI), and the National Association of Home Inspectors (NAHI)(No Longer active 10/2017); and, in Canada, the Canadian Association of Home and Property Inspectors (CAHPI), the Professional Home & Property Inspectors of Canada (PHPIC) and the National Home Inspector Certification Council (NHICC).

Currently, more than thirty U.S. states regulate the home inspection industry in some form.

Canada saw a deviation from this model when in 2016 an association-independent home inspection standard was completed. This was developed in partnership with industry



professionals, consumer advocates, and technical experts, by the Canadian Standards Association. The CAN/CSA A770-16 Home Inspection Standard was funded by three provincial governments with the intent to be the unifying standard for home inspections carried out within Canada. It is the only home inspection standard that has been endorsed by the Standards Council of Canada.

In Canada, there are provincial associations which focus on provincial differences that affect their members and consumers. Ontario has the largest population of home inspectors which was estimated in 2013 as part of a government survey at being around 1500.<sup>[4]</sup>

To date, Ontario Association of Certified Home Inspectors is the only association which has mandated that its members migrate to the CAN/CSA A770-16 Home Inspection Standard, with a date of migration set as February 28, 2020. Other national and provincial associations have set it as an option to be added to other supported standards.

In Canada, only Alberta and British Columbia have implemented government regulation for the home inspection profession. The province of Ontario has proceeded through the process, with the passage of regulatory procedure culminating in the Home Inspection Act, 2017 to license Home Inspectors in that province. It has received royal assent but is still awaiting the development of regulations and proclamation to become law.

In Ontario, there are two provincial Associations, OAHI (the Ontario Association of Home Inspectors) and OntarioACHI (the Ontario Association of Certified Home Inspectors). Both claim to be the largest association in the province. OAHI, formed by a private member's Bill in the Provincial Assembly, has the right in law to award the R.H.I. (Registered Home Inspector) designation to anyone on its membership register. The R.H.I. designation, however, is a reserved designation, overseen by OAHI under the Ontario Association of Home Inspectors Act, 1994. This Act allows OAHI to award members who have passed and maintained strict criteria set out in their membership bylaws and who operate within Ontario. Similarly, OntarioACHI requires equally high standards for the award of their certification, the Canadian-Certified Home Inspector (CCHI) designation. To confuse things, Canadian Association of Home and Property Inspectors (CAHPI) own the copyright to the terms Registered Home Inspector and RHI. Outside of Ontario, OAHI Members cannot use the terms without being qualified by CAHPI.

The proclamation of the Home Inspection Act, 2017, requires the dissolution of the Ontario Association of Home Inspectors Act, 1994, which will remove the right to title in Ontario of the RHI at the same time removing consumer confusion about the criteria for its award across Canada.

## **United Kingdom**

[edit]

A home inspector in the United Kingdom (or more precisely in England and Wales), was an inspector certified to carry out the Home Condition Reports that it was originally anticipated would be included in the Home Information Pack.

Home inspectors were required to complete the ABBE Diploma in Home Inspection to show they met the standards set out for NVQ/VRQ competency-based assessment (Level 4). The government had suggested that between 7,500 and 8,000 qualified and licensed home inspectors would be needed to meet the annual demand of nearly 2,000,000 Home Information Packs. In the event, many more than this entered training, resulting in a massive oversupply of potential inspectors.

With the cancellation of Home Information Packs by the coalition Government in 2010, the role of the home inspector in the United Kingdom became permanently redundant.

Inspections of the home, as part of a real estate transaction, are still generally carried out in the UK in the same manner as they had been for years before the Home Condition Report process. Home Inspections are more detailed than those currently offered in North America. They are generally performed by a chartered member of the Royal Institution of Chartered Surveyors.

## **India**

[edit]

The concept of home inspection in India is in its infancy. There has been a proliferation of companies that have started offering the service, predominantly in Tier-1 cities such as Bangalore, Chennai, Kolkata, Pune, Mumbai, etc. To help bring about a broader understanding among the general public and market the concept, a few home inspection companies have come together and formed the Home Inspection Association of India.<sup>[5]</sup>

After RERA came into effect, the efficacy and potency of home inspection companies has increased tremendously. The majority of homeowners and potential home buyers do not know what home inspection is or that such a service exists.

The way that home inspection is different in India<sup>[6]</sup> than in North America or United Kingdom is the lack of a government authorised licensing authority. Apart from the fact that houses in India are predominantly built with kiln baked bricks, concrete blocks or even just concrete walls (predominantly in high rise apartments) this means the tests conducted are vastly different. Most home inspection companies conduct non-destructive testing of the property, in some cases based on customer requirement, tests that require core-cutting are also performed.

The majority of homeowners are not aware of the concept of home inspection in India. The other issue is that the balance of power is highly tilted toward the builder; this means the home buyers are stepping on their proverbial toes, because in most cases, the home is the single most expensive purchase in their lifetime, and the homeowners do not want to come across as

antagonising the builders.

## **Home inspection standards and exclusions**

[edit]

Some home inspectors and home inspection regulatory bodies maintain various standards related to the trade. Some inspection companies offer 90-day limited warranties to protect clients from unexpected mechanical and structural failures; otherwise, inspectors are not responsible for future failures.<sup>[a]</sup> A general inspection standard for buildings other than residential homes can be found at the National Academy of Building Inspection Engineers.

Many inspectors may also offer ancillary services such as inspecting pools, sprinkler systems, checking radon levels, and inspecting for wood-destroying organisms. The CAN/CSA-A770-16 standard allows this (in-fact it demands swimming pool safety inspections as a requirement) and also mandates that the inspector be properly qualified to offer these. Other standards are silent on this.

## **Types of inspections**

[edit]

### **Home buyers and home sellers inspections**

[edit]

Home inspections are often used by prospective purchasers of the house in question, in order to evaluate the condition of the house prior to the purchase. Similarly, a home seller can elect to have an inspection on their property and report the results of that inspection to the prospective buyer.

### **Foreclosure inspection**

[edit]

Recently foreclosed properties may require home inspections.

### **Four point inspection**

[edit]

An inspection of the house's roof, HVAC, and electrical and plumbing systems is often known as a "four-point inspection", which insurance companies may require as a condition for homeowner's insurance.

## **Disaster inspection**

[edit]

Home inspections may occur after a disaster has struck the house. A disaster examination, unlike a standard house inspection, concentrates on damage rather than the quality of everything visible and accessible from the roof to the basement.

Inspectors go to people's homes or work places who have asked for FEMA disaster aid.

## **Section 8 inspection**

[edit]

In the United States, the federal and state governments provide housing subsidies to low-income people through the Section 8 program. The government expects that the housing will be "fit for habitation" so a Section 8 inspection identifies compliance with HUD's Housing Quality Standards (HQS).

## **Pre-delivery inspection**

[edit]

See also: Pre-delivery inspection

An inspection may occur in a purchased house prior to the deal's closure, in what is known as a "pre-delivery" inspection.

## **Structural inspection**

[edit]

The house's structure may also be inspected. When performing a structural inspection, the inspector will look for a variety of distress indications that may result in repair or further evaluation recommendations.

In the state of New York, only a licensed professional engineer or a registered architect can render professional opinions as to the sufficiency structural elements of a home or building.<sup>[11]</sup> Municipal building officials can also make this determination, but they are not performing home inspections at the time they are rendering this opinion. Municipal officials are also not required to look out for the best interest of the buyer. Some other states may have similar provisions in their licensing laws. Someone who is not a licensed professional engineer or a registered architect can describe the condition of structural elements (cracked framing, sagged beams/roof, severe rot or insect damage, etc.), but are not permitted to render a professional

opinion as to how the condition has affected the structural soundness of the building.

Various systems of the house, including plumbing and HVAC, may also be inspected.<sup>[12]</sup>

### **Thermal imaging Inspection**

[edit]

A thermal imaging inspection using an infrared camera can provide inspectors with information on home energy loss, heat gain/loss through the exterior walls and roof, moisture leaks, and improper electrical system conditions that are typically not visible to the naked eye. Thermal imaging is not considered part of a General Home Inspection because it exceeds the scope of inspection Standards of Practice.

### **Pool and spa inspection**

[edit]

Inspection of swimming pools and spas is not considered part of a General Home Inspection because their inspection exceeds the scope of inspection Standards of Practice. However, some home inspectors are also certified to inspect pools and spas and offer this as an ancillary service.<sup>[13]</sup>

### **Tree health inspection**

[edit]

Inspection of trees on the property is not considered part of a General Home Inspection because their inspection exceeds the scope of inspection Standards of Practice. This type of inspection is typically performed by a Certified Arborist and assesses the safety and condition of the trees on a property before the sales agreement is executed.<sup>[14]</sup>

### **Property inspection report for immigration**

[edit]

The UKVI (United Kingdom Visa and Immigration) issued guidance on the necessity of ensuring that properties must meet guidelines so that visa applicants can be housed in properties which meet environmental and health standards. Part X of the Housing Act 1985 provides the legislative grounding for the reports - primarily to ensure that a property is not currently overcrowded, that the inclusion of further individuals as a result of successful visa applications - whether spouse visa, dependent visa, indefinite leave to remain or visitor visa, can house the applicants without the property becoming overcrowded. Reports are typically

prepared by environmental assessors or qualified solicitors in accordance with HHSRS (Housing Health and Safety Rating Scheme). Property inspection reports are typically standard and breakdown the legal requirements.

## Pre-Listing Home Inspection

[edit]

A pre-listing inspection focuses on all major systems and components of the house including HVAC, electrical, plumbing, siding, doors, windows, roof and structure. It's a full home inspection for the seller to better understand the condition of their home prior to the buyer's own inspection.

## See also

[edit]

- List of real estate topics
- Real estate appraisal

## Notes

[edit]

- <sup>^</sup> A general list of exclusions include but are not limited to: code or zoning violations, permit research, property measurements or surveys, boundaries, easements or right of way, conditions of title, proximity to environmental hazards, noise interference, soil or geological conditions, well water systems or water quality, underground sewer lines, waste disposal systems, buried piping, cisterns, underground water tanks and sprinkler systems. A complete list of standards and procedures for home inspections can be found at NAHI,<sup>[7]</sup> ASHI,<sup>[8]</sup> InterNACHI,<sup>[9]</sup> or IHINA<sup>[10]</sup> websites.

## References

[edit]


- <sup>^</sup> "General Laws: CHAPTER 112, Section 87YY1/2". *Malegislature.gov*. Archived from the original on 2012-04-27. Retrieved 2012-05-29.
- <sup>^</sup> "SB 721- CHAPTERED". *leginfo.legislature.ca.gov*. Retrieved 2025-02-13.
- <sup>^</sup> "SB721 Inspection California | DRBalcony". 2024-09-12. Retrieved 2025-02-13.
- <sup>^</sup> <http://www.ontariocanada.com/registry/showAttachment.do?postingId=14645&attachmentId=228> Archived 2017-06-27 at the Wayback Machine <sup>[bare URL PDF]</sup>

5. ^ "Home Inspection Association of India". Archived from the original on 2019-09-07. Retrieved 2019-08-30.
6. ^ "End-to-End Expert Property Inspection Services". Archived from the original on 2022-08-26. Retrieved 2022-08-26.
7. ^ "NAHI". Archived from the original on 1998-01-29. Retrieved 2011-02-05.
8. ^ "ASHI". Archived from the original on 2008-05-09. Retrieved 2009-12-11.
9. ^ "InterNACHI". Archived from the original on 2010-08-30. Retrieved 2010-08-27.
10. ^ "IHINA". Archived from the original on 2012-01-07. Retrieved 2012-02-09.
11. ^ "NYS Professional Engineering & Land Surveying:Laws, Rules & Regulations:Article 145". [www.op.nysed.gov](http://www.op.nysed.gov). Archived from the original on 2018-02-27. Retrieved 2018-04-04.
12. ^ "Material Defects & Useful Remaining Life of Home Systems". Archived from the original on 2019-02-02. Retrieved 2019-02-01.
13. ^ "InterNACHI's Standards of Practice for Inspecting Pools & Spas - InterNACHI". [www.nachi.org](http://www.nachi.org). Archived from the original on 2019-03-21. Retrieved 2019-04-09.
14. ^ "Property Inspection Report | From £80". Property Inspection Report - Immigration & Visa. Archived from the original on 2022-05-19. Retrieved 2022-05-12.


## About soil mechanics




**This article may be too long to read and navigate comfortably.** Consider splitting content into sub-articles, condensing it, or adding subheadings. Please discuss this issue on the article's talk page. *(February 2025)*

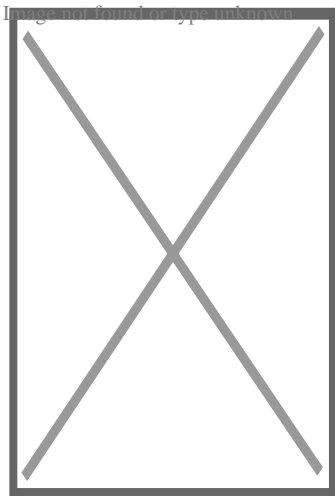


The Leaning Tower of Pisa – an example of a problem due to deformation of soil

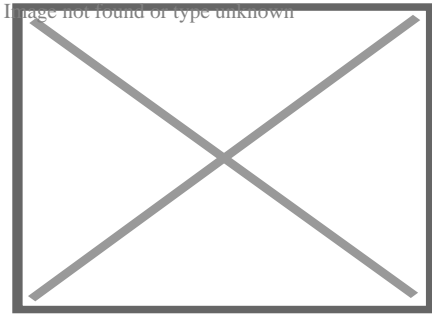

Slope instability issues for a temporary flood control levee in North Dakota, 2009

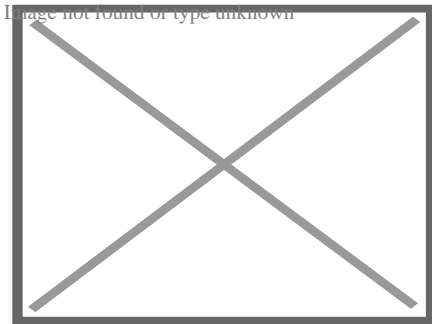

Earthwork in Germany

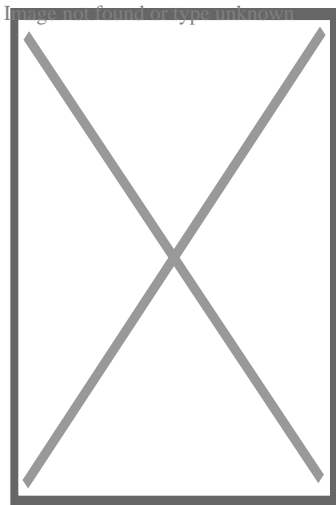

Fox Glacier, New Zealand: Soil produced and transported by intense weathering and erosion

**Soil mechanics** is a branch of soil physics and applied mechanics that describes the behavior of soils. It differs from fluid mechanics and solid mechanics in the sense that soils consist of a heterogeneous mixture of fluids (usually air and water) and particles (usually clay, silt, sand, and gravel) but soil may also contain organic solids and other matter.<sup>[1][2][3][4]</sup> Along with rock mechanics, soil mechanics provides the theoretical basis for analysis in geotechnical engineering,<sup>[5]</sup> a subdiscipline of civil engineering, and engineering geology, a subdiscipline of geology. Soil mechanics is used to analyze the deformations of and flow of fluids within natural and man-made structures that are supported on or made of soil, or structures that are buried in soils.<sup>[6]</sup> Example applications are building and bridge foundations, retaining walls, dams, and buried pipeline systems. Principles of soil mechanics are also used in related disciplines such



as geophysical engineering, coastal engineering, agricultural engineering, and hydrology.

This article describes the genesis and composition of soil, the distinction between *pore water pressure* and inter-granular *effective stress*, capillary action of fluids in the soil pore spaces, *soil classification*, *seepage* and *permeability*, time dependent change of volume due to squeezing water out of tiny pore spaces, also known as *consolidation*, *shear strength* and stiffness of soils. The shear strength of soils is primarily derived from friction between the particles and interlocking, which are very sensitive to the effective stress.<sup>[7]</sup><sup>[6]</sup> The article concludes with some examples of applications of the principles of soil mechanics such as slope stability, lateral earth pressure on retaining walls, and bearing capacity of foundations.

## Genesis and composition of soils

[edit]

### Genesis

[edit]

The primary mechanism of soil creation is the weathering of rock. All rock types (igneous rock, metamorphic rock and sedimentary rock) may be broken down into small particles to create soil. Weathering mechanisms are physical weathering, chemical weathering, and biological weathering <sup>[1]</sup><sup>[2]</sup><sup>[3]</sup> Human activities such as excavation, blasting, and waste disposal, may also create soil. Over geologic time, deeply buried soils may be altered by pressure and temperature to become metamorphic or sedimentary rock, and if melted and solidified again, they would complete the geologic cycle by becoming igneous rock.<sup>[3]</sup>

Physical weathering includes temperature effects, freeze and thaw of water in cracks, rain, wind, impact and other mechanisms. Chemical weathering includes dissolution of matter composing a rock and precipitation in the form of another mineral. Clay minerals, for example can be formed by weathering of feldspar, which is the most common mineral present in igneous rock.

The most common mineral constituent of silt and sand is quartz, also called silica, which has the chemical name silicon dioxide. The reason that feldspar is most common in rocks but silica is more prevalent in soils is that feldspar is much more soluble than silica.


Silt, Sand, and Gravel are basically little pieces of broken rocks.

According to the Unified Soil Classification System, silt particle sizes are in the range of 0.002 mm to 0.075 mm and sand particles have sizes in the range of 0.075 mm to 4.75 mm.

Gravel particles are broken pieces of rock in the size range 4.75 mm to 100 mm. Particles larger than gravel are called cobbles and boulders.<sup>[1]</sup><sup>[2]</sup>

## Transport

[edit]

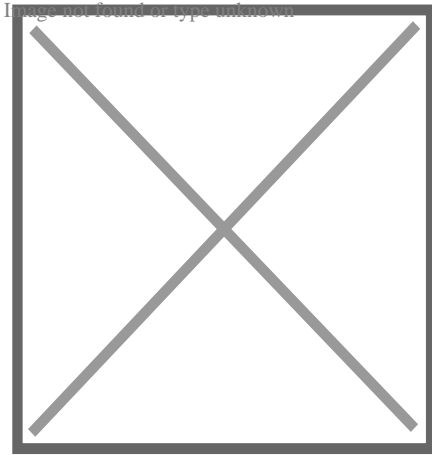

Example soil horizons. a) top soil and colluvium b) mature residual soil c) young residual soil d) weathered rock

Soil deposits are affected by the mechanism of transport and deposition to their location. Soils that are not transported are called residual soils—they exist at the same location as the rock from which they were generated. Decomposed granite is a common example of a residual soil. The common mechanisms of transport are the actions of gravity, ice, water, and wind. Wind blown soils include dune sands and loess. Water carries particles of different size depending on the speed of the water, thus soils transported by water are graded according to their size. Silt and clay may settle out in a lake, and gravel and sand collect at the bottom of a river bed. Wind blown soil deposits (aeolian soils) also tend to be sorted according to their grain size. Erosion at the base of glaciers is powerful enough to pick up large rocks and boulders as well as soil; soils dropped by melting ice can be a well graded mixture of widely varying particle sizes. Gravity on its own may also carry particles down from the top of a mountain to make a pile of soil and boulders at the base; soil deposits transported by gravity are called colluvium.<sup>[1]</sup><sup>[2]</sup>

The mechanism of transport also has a major effect on the particle shape. For example, low velocity grinding in a river bed will produce rounded particles. Freshly fractured colluvium particles often have a very angular shape.

## Soil composition

[edit]

## Soil mineralogy

[edit]

Silts, sands and gravels are classified by their size, and hence they may consist of a variety of minerals. Owing to the stability of quartz compared to other rock minerals, quartz is the most common constituent of sand and silt. Mica, and feldspar are other common minerals present in sands and silts.<sup>[1]</sup> The mineral constituents of gravel may be more similar to that of the parent rock.

The common clay minerals are montmorillonite or smectite, illite, and kaolinite or kaolin. These minerals tend to form in sheet or plate like structures, with length typically ranging between  $10^{-7}$  m and  $4 \times 10^{-6}$  m and thickness typically ranging between  $10^{-9}$  m and  $2 \times 10^{-6}$  m, and they have a relatively large specific surface area. The specific surface area (SSA) is defined as the ratio of the surface area of particles to the mass of the particles. Clay minerals typically have specific surface areas in the range of 10 to 1,000 square meters per gram of solid.<sup>[3]</sup> Due to the large surface area available for chemical, electrostatic, and van der Waals interaction, the mechanical behavior of clay minerals is very sensitive to the amount of pore fluid available and the type and amount of dissolved ions in the pore fluid.<sup>[1]</sup>

The minerals of soils are predominantly formed by atoms of oxygen, silicon, hydrogen, and aluminum, organized in various crystalline forms. These elements along with calcium, sodium, potassium, magnesium, and carbon constitute over 99 per cent of the solid mass of soils.<sup>[1]</sup>

## Grain size distribution

[edit]


Main article: Soil gradation

Soils consist of a mixture of particles of different size, shape and mineralogy. Because the size of the particles obviously has a significant effect on the soil behavior, the grain size and grain size distribution are used to classify soils. The grain size distribution describes the relative proportions of particles of various sizes. The grain size is often visualized in a cumulative distribution graph which, for example, plots the percentage of particles finer than a given size as a function of size. The median grain size,  $d_{50}$ , which 50% of the particle mass consists of finer particles. Soil behavior, especially the hydraulic conductivity, tends to be dominated by the smaller particles, hence, the term "effective size", denoted by  $d_{10}$  as the size for which 10% of the particle mass consists of finer particles.

Sands and gravels that possess a wide range of particle sizes with a smooth distribution of particle sizes are called *well graded* soils. If the soil particles in a sample are predominantly in a relatively narrow range of sizes, the sample is *uniformly graded*. If a soil sample has distinct gaps in the gradation curve, e.g., a mixture of gravel and fine sand, with no coarse sand, the sample may be *gap graded*. *Uniformly graded* and *gap graded* soils are both considered to be *poorly graded*. There are many methods for measuring particle-size distribution. The two traditional methods are sieve analysis and hydrometer analysis.

## Sieve analysis

[edit]

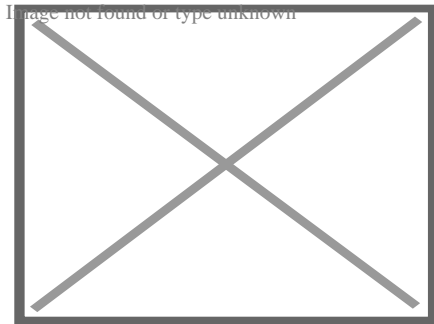

Sieve

The size distribution of gravel and sand particles are typically measured using sieve analysis. The formal procedure is described in ASTM D6913-04(2009).<sup>[8]</sup> A stack of sieves with accurately dimensioned holes between a mesh of wires is used to separate the particles into size bins. A known volume of dried soil, with clods broken down to individual particles, is put into the top of a stack of sieves arranged from coarse to fine. The stack of sieves is shaken for a standard period of time so that the particles are sorted into size bins. This method works reasonably well for particles in the sand and gravel size range. Fine particles tend to stick to each other, and hence the sieving process is not an effective method. If there are a lot of fines (silt and clay) present in the soil it may be necessary to run water through the sieves to wash the coarse particles and clods through.

A variety of sieve sizes are available. The boundary between sand and silt is arbitrary. According to the Unified Soil Classification System, a #4 sieve (4 openings per inch) having 4.75 mm opening size separates sand from gravel and a #200 sieve with an 0.075 mm opening separates sand from silt and clay. According to the British standard, 0.063 mm is the boundary between sand and silt, and 2 mm is the boundary between sand and gravel.<sup>[3]</sup>

## Hydrometer analysis

[edit]


The classification of fine-grained soils, i.e., soils that are finer than sand, is determined primarily by their Atterberg limits, not by their grain size. If it is important to determine the grain size distribution of fine-grained soils, the hydrometer test may be performed. In the hydrometer tests, the soil particles are mixed with water and shaken to produce a dilute suspension in a glass cylinder, and then the cylinder is left to sit. A hydrometer is used to measure the density of the suspension as a function of time. Clay particles may take several hours to settle past the

depth of measurement of the hydrometer. Sand particles may take less than a second. Stokes' law provides the theoretical basis to calculate the relationship between sedimentation velocity and particle size. ASTM provides the detailed procedures for performing the Hydrometer test.

Clay particles can be sufficiently small that they never settle because they are kept in suspension by Brownian motion, in which case they may be classified as colloids.

## Mass-volume relations

[edit]

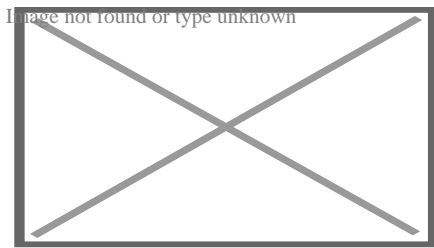

A phase diagram of soil indicating the masses and volumes of air, solid, water, and voids

There are a variety of parameters used to describe the relative proportions of air, water and solid in a soil. This section defines these parameters and some of their interrelationships.<sup>[2][6]</sup>  
The basic notation is as follows:

$V_a$ ,  $V_w$ , and  $V_s$  represent the volumes of air, water and solids in a soil mixture;

$W_a$ ,  $W_w$ , and  $W_s$  represent the weights of air, water and solids in a soil mixture;

$M_a$ ,  $M_w$ , and  $M_s$  represent the masses of air, water and solids in a soil mixture;

$\rho_a$ ,  $\rho_w$ , and  $\rho_s$  represent the densities of the constituents (air, water and solids) in a soil mixture;

Note that the weights,  $W$ , can be obtained by multiplying the mass,  $M$ , by the acceleration due to gravity,  $g$ ; e.g.,  $W_s = M_s g$

Specific Gravity is the ratio of the density of one material compared to the density of pure water  
 $\rho_w = 1 \text{ g/cm}^3$

$$G_s = \frac{\rho_s}{\rho_w}$$

*Specific gravity of solids,*

Note that specific weight, conventionally denoted by the symbol  $\gamma$ , may be obtained by multiplying the density ( $\rho$ ) of a material by the acceleration due to gravity,  $\gamma = \rho g$

*Density, bulk density, or wet density,*  $\rho$  are different names for the density of the mixture, i.e., the total mass of air, water, solids divided by the total volume of air water and solids (the mass of air is assumed to be zero for practical purposes):

$$\rho = \frac{M_s + M_w}{V_s + V_w + V_a} = \frac{M_t}{V_t}$$

Image not found or type unknown

*Dry density,*  $\rho_d$  is the mass of solids divided by the total volume of air water and solids:

$$\rho_d = \frac{M_s}{V_s + V_w + V_a} = \frac{M_s}{V_t}$$

Image not found or type unknown

*Buoyant density,*  $\rho'$  defined as the density of the mixture minus the density of water is useful if the soil is submerged under water:

$$\rho' = \rho - \rho_w$$

Image not found or type unknown

where  $\rho_w$  is the density of water

*Water content,*  $w$  is the ratio of mass of water to mass of solid. It is easily measured by weighing a sample of the soil, drying it out in an oven and re-weighing. Standard procedures are described by ASTM.

$$w = \frac{M_w}{M_s} = \frac{W_w}{W_s}$$

Image not found or type unknown

*Void ratio,*  $e$  is the ratio of the volume of voids to the volume of solids:

$$e = \frac{V_v}{V_s} = \frac{V_v}{V_t - V_v} = \frac{n}{1-n}$$

Image not found or type unknown

*Porosity,*  $n$  is the ratio of volume of voids to the total volume, and is related to the void ratio:

$$n = \frac{V_v}{V_t} = \frac{V_v}{V_s + V_v} = \frac{e}{1+e}$$

Image not found or type unknown

*Degree of saturation,*  $S$  is the ratio of the volume of water to the volume of voids:

$$S = \frac{V_w}{V_v}$$

Image not found or type unknown

From the above definitions, some useful relationships can be derived by use of basic algebra.

$$\rho = \frac{(G_s + Se)\rho_w}{1 + e}$$

Image not found or type unknown

$$\rho = \frac{(1 + w)G_s}{\rho_w}$$

Image not found or type unknown

$$w = \frac{Se}{G_s}$$

Image not found or type unknown

## Soil classification

[edit]

Geotechnical engineers classify the soil particle types by performing tests on disturbed (dried, passed through sieves, and remolded) samples of the soil. This provides information about the characteristics of the soil grains themselves. Classification of the types of grains present in a soil does not<sup>*[clarification needed]*</sup> account for important effects of the *structure* or *fabric* of the soil, terms that describe compactness of the particles and patterns in the arrangement of particles in a load carrying framework as well as the pore size and pore fluid distributions. Engineering geologists also classify soils based on their genesis and depositional history.

## Classification of soil grains

[edit]

In the US and other countries, the Unified Soil Classification System (USCS) is often used for soil classification. Other classification systems include the British Standard BS 5930 and the AASHTO soil classification system.<sup>[3]</sup>

## Classification of sands and gravels

[edit]

In the USCS, gravels (given the symbol *G*) and sands (given the symbol *S*) are classified according to their grain size distribution. For the USCS, gravels may be given the classification symbol *GW* (well-graded gravel), *GP* (poorly graded gravel), *GM* (gravel with a large amount of silt), or *GC* (gravel with a large amount of clay). Likewise sands may be classified as being *SW*, *SP*, *SM* or *SC*. Sands and gravels with a small but non-negligible amount of fines (5–12%) may be given a dual classification such as *SW-SC*.

## Atterberg limits

[edit]

Clays and Silts, often called 'fine-grained soils', are classified according to their Atterberg limits; the most commonly used Atterberg limits are the *liquid limit* (denoted by *LL* or  $\omega_L$ ), *plastic limit* (denoted by *PL* or  $\omega_P$ ), and *shrinkage limit* (denoted by *SL*).

The liquid limit is the water content at which the soil behavior transitions from a plastic solid to a liquid. The plastic limit is the water content at which the soil behavior transitions from that of a plastic solid to a brittle solid. The Shrinkage Limit corresponds to a water content below which the soil will not shrink as it dries. The consistency of fine grained soil varies in proportional to the water content in a soil.

As the transitions from one state to another are gradual, the tests have adopted arbitrary definitions to determine the boundaries of the states. The liquid limit is determined by measuring the water content for which a groove closes after 25 blows in a standard test.<sup>[9]</sup><sup>[clarification needed]</sup> Alternatively, a fall cone test apparatus may be used to measure the liquid limit. The undrained shear strength of remolded soil at the liquid limit is approximately 2 kPa.<sup>[4]</sup><sup>[10]</sup> The plastic limit is the water content below which it is not possible to roll by hand the soil into 3 mm diameter cylinders. The soil cracks or breaks up as it is rolled down to this diameter. Remolded soil at the plastic limit is quite stiff, having an undrained shear strength of the order of about 200 kPa.<sup>[4]</sup><sup>[10]</sup>

The *plasticity index* of a particular soil specimen is defined as the difference between the liquid limit and the plastic limit of the specimen; it is an indicator of how much water the soil particles in the specimen can absorb, and correlates with many engineering properties like permeability, compressibility, shear strength and others. Generally, the clay having high plasticity have lower permeability and also they are also difficult to be compacted.

## Classification of silts and clays

[edit]

According to the Unified Soil Classification System (USCS), silts and clays are classified by plotting the values of their plasticity index and liquid limit on a plasticity chart. The A-Line on the chart separates clays (given the USCS symbol *C*) from silts (given the symbol *M*).  $LL=50\%$  separates high plasticity soils (given the modifier symbol *H*) from low plasticity soils (given the modifier symbol *L*). A soil that plots above the A-line and has  $LL>50\%$  would, for example, be classified as *CH*. Other possible classifications of silts and clays are *ML*, *CL* and *MH*. If the Atterberg limits plot in the "hatched" region on the graph near the origin, the soils are given the dual classification 'CL-ML'.



## Indices related to soil strength

[edit]

### Liquidity index

[edit]

The effects of the water content on the strength of saturated remolded soils can be quantified by the use of the *liquidity index*, *LI*:

$$LI = \frac{w - PL}{PL - LL}$$

Image not found or type unknown

When the LI is 1, remolded soil is at the liquid limit and it has an undrained shear strength of about 2 kPa. When the soil is at the plastic limit, the LI is 0 and the undrained shear strength is about 200 kPa.<sup>[4][11]</sup>

### Relative density

[edit]

The density of sands (cohesionless soils) is often characterized by the relative density,  $D_r$ .

$$D_r = \frac{e_{max} - e}{e_{max} - e_{min}} 100\%$$

Image not found or type unknown

where:  $e_{max}$  is the "maximum void ratio" corresponding to a very loose state,  $e_{min}$  is the "minimum void ratio" corresponding to a very dense state and  $e$  is the in-situ void ratio.


Methods used to calculate relative density are defined in ASTM D4254-00(2006).<sup>[12]</sup>

Thus if  $D_r = 100\%$  the sand or gravel is very dense, and if  $D_r = 0\%$  the soil is extremely loose and unstable.

### Seepage: steady state flow of water

[edit]

This section is an excerpt from Seepage.[edit]

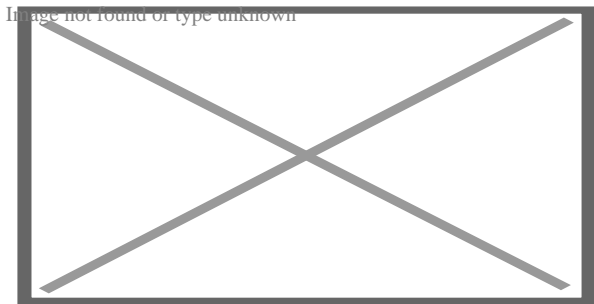


A cross section showing the water table varying with surface topography as well as a perched water table

In soil mechanics, seepage is the movement of water through soil. If fluid pressures in a soil deposit are uniformly increasing with depth according to  $\gamma_w d$ , where  $d$  is the depth below the water table, then hydrostatic conditions will prevail and the fluids will *not* be flowing through the soil. However, if the water table is sloping or there is a perched water table as indicated in the accompanying sketch, then seepage will occur. For steady state seepage, the seepage velocities are not varying with time. If the water tables are changing levels with time, or if the soil is in the process of consolidation, then steady state conditions do not apply.

### Effective stress and capillarity: hydrostatic conditions

[edit]

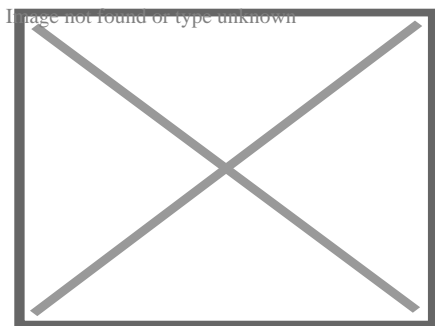

Spheres immersed in water, reducing effective stress

Main article: Effective stress

To understand the mechanics of soils it is necessary to understand how normal stresses and shear stresses are shared by the different phases. Neither gas nor liquid provide significant resistance to shear stress. The shear resistance of soil is provided by friction and interlocking of the particles. The friction depends on the intergranular contact stresses between solid particles. The normal stresses, on the other hand, are shared by the fluid and the particles.<sup>[7]</sup> Although the pore air is relatively compressible, and hence takes little normal stress in most geotechnical problems, liquid water is relatively incompressible and if the voids are saturated with water, the pore water must be squeezed out in order to pack the particles closer together.

The principle of effective stress, introduced by Karl Terzaghi, states that the effective stress  $\sigma'$  (i.e., the average intergranular stress between solid particles) may be calculated by a simple subtraction of the pore pressure from the total stress:

$$\sigma' = \sigma - u,$$

where  $\sigma$  is the total stress and  $u$  is the pore pressure. It is not practical to measure  $\sigma'$  directly, so in practice the vertical effective stress is calculated from the pore pressure and vertical total stress. The distinction between the terms pressure and stress is also important. By definition, pressure at a point is equal in all directions but stresses at a point can be different in different directions. In soil mechanics, compressive stresses and pressures are considered to be positive and tensile stresses are considered to be negative, which is different from the solid mechanics sign convention for stress.

## Total stress

[edit]

For level ground conditions, the total vertical stress at a point,  $\sigma_v$ , on average, is the weight of everything above that point per unit area. The vertical stress beneath a uniform surface layer with density  $\rho$  and thickness  $H$  is given by the following example:

$$\sigma_v = \rho g H = \gamma H$$

where  $g$  is the acceleration due to gravity, and  $\gamma$  is the unit weight of the overlying layer. If there are multiple layers of soil or water above the point of interest, the vertical stress may be calculated by summing the product of the unit weight and thickness of all of the overlying layers. Total stress increases with increasing depth in proportion to the density of the overlying soil.

It is not possible to calculate the horizontal total stress in this way. Lateral earth pressures are addressed elsewhere.


## Pore water pressure

[edit]

Main article: Pore water pressure

## Hydrostatic conditions

[edit]

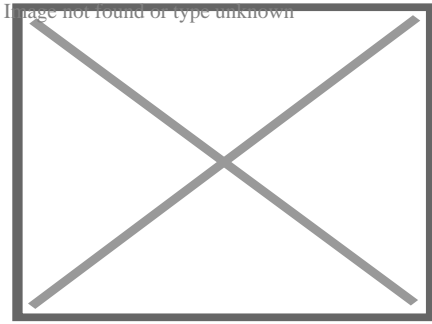

Water is drawn into a small tube by surface tension. Water pressure,  $u$ , is negative above and positive below the free water surface.

If the soil pores are filled with water that is not flowing but is static, the pore water pressures will be hydrostatic. The water table is located at the depth where the water pressure is equal to the atmospheric pressure. For hydrostatic conditions, the water pressure increases linearly with depth below the water table:

$$u = \rho_w g z_w$$

where  $\rho_w$  is the density of water, and  $z_w$  is the depth below the water table.

## Capillary action

[edit]

Due to surface tension, water will rise up in a small capillary tube above a free surface of water. Likewise, water will rise up above the water table into the small pore spaces around the soil particles. In fact the soil may be completely saturated for some distance above the water table. Above the height of capillary saturation, the soil may be wet but the water content will decrease with elevation. If the water in the capillary zone is not moving, the water pressure obeys the equation of hydrostatic equilibrium,  $u = \rho_w g z_w$ , but note that  $z_w$  is negative above the water table. Hence, hydrostatic water pressures are negative above the water table. The thickness of the zone of capillary saturation depends on the pore size, but typically, the heights vary between a centimeter or so for coarse sand to tens of meters for a silt or clay.<sup>[3]</sup> In fact the pore space of soil is a uniform fractal e.g. a set of uniformly distributed D-dimensional fractals of average linear size  $L$ . For the clay soil it has been found that  $L=0.15$  mm and  $D=2.7$ .<sup>[13]</sup>

The surface tension of water explains why the water does not drain out of a wet sand castle or a moist ball of clay. Negative water pressures make the water stick to the particles and pull the particles to each other, friction at the particle contacts make a sand castle stable. But as soon as a wet sand castle is submerged below a free water surface, the negative pressures are lost and the castle collapses. Considering the effective stress equation,  $\sigma' = \sigma - u$ , if the water pressure is negative, the effective stress may be positive, even on a free surface (a surface where the total normal stress is zero). The negative pore pressure pulls the particles together and causes compressive particle to particle contact forces. Negative pore pressures in clayey

soil can be much more powerful than those in sand. Negative pore pressures explain why clay soils shrink when they dry and swell as they are wetted. The swelling and shrinkage can cause major distress, especially to light structures and roads.[<sup>14</sup>]

Later sections of this article address the pore water pressures for seepage and consolidation problems.

### Water at particle contacts

○

Image not found or type unknown

Water at  
particle  
contacts

- Intergranular contact force due to surface tension

Image not found or type unknown

Intergranular  
contact force due  
to surface tension  
Shrinkage caused by drying

○

Image not found or type unknown


Shrinkage caused by  
drying

### Consolidation: transient flow of water

[edit]

Main article: Consolidation (soil)

Image not found or type unknown

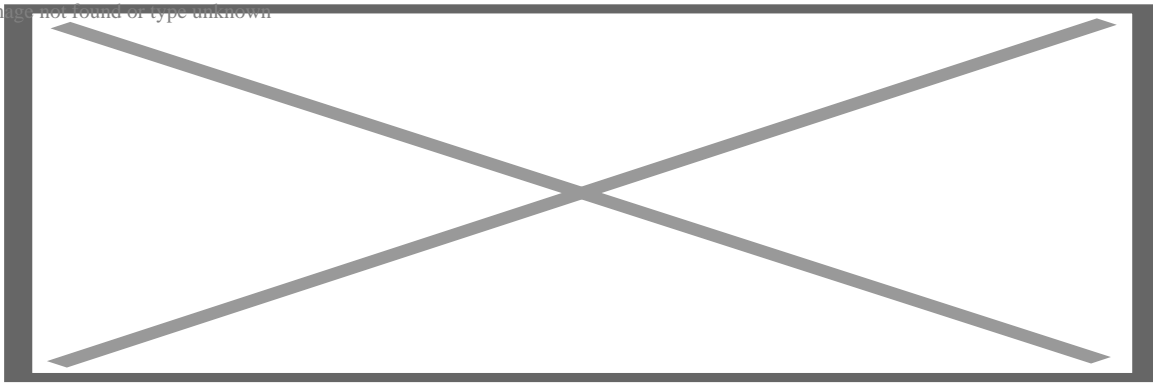

Consolidation analogy. The piston is supported by water underneath and a spring. When a load is applied to the piston, water pressure increases to support the load. As the water slowly leaks through the small hole, the load is transferred from the water pressure to the spring force.


Consolidation is a process by which soils decrease in volume. It occurs when stress is applied to a soil that causes the soil particles to pack together more tightly, therefore reducing volume. When this occurs in a soil that is saturated with water, water will be squeezed out of the soil. The time required to squeeze the water out of a thick deposit of clayey soil layer might be years. For a layer of sand, the water may be squeezed out in a matter of seconds. A building foundation or construction of a new embankment will cause the soil below to consolidate and this will cause settlement which in turn may cause distress to the building or embankment. Karl Terzaghi developed the theory of one-dimensional consolidation which enables prediction of the amount of settlement and the time required for the settlement to occur.<sup>[15]</sup> Afterwards, Maurice Biot fully developed the three-dimensional soil consolidation theory, extending the one-dimensional model previously developed by Terzaghi to more general hypotheses and introducing the set of basic equations of Poroelasticity.<sup>[7]</sup> Soils are tested with an oedometer test to determine their compression index and coefficient of consolidation.

When stress is removed from a consolidated soil, the soil will rebound, drawing water back into the pores and regaining some of the volume it had lost in the consolidation process. If the stress is reapplied, the soil will re-consolidate again along a recompression curve, defined by the recompression index. Soil that has been consolidated to a large pressure and has been subsequently unloaded is considered to be *overconsolidated*. The maximum past vertical effective stress is termed the *preconsolidation stress*. A soil which is currently experiencing the maximum past vertical effective stress is said to be *normally consolidated*. The *overconsolidation ratio*, (OCR) is the ratio of the maximum past vertical effective stress to the current vertical effective stress. The OCR is significant for two reasons: firstly, because the compressibility of normally consolidated soil is significantly larger than that for overconsolidated soil, and secondly, the shear behavior and dilatancy of clayey soil are related to the OCR through critical state soil mechanics; highly overconsolidated clayey soils are dilatant, while normally consolidated soils tend to be contractive.<sup>[2][3][4]</sup>

## Shear behavior: stiffness and strength

[edit]

## Main article: shear strength (soil)

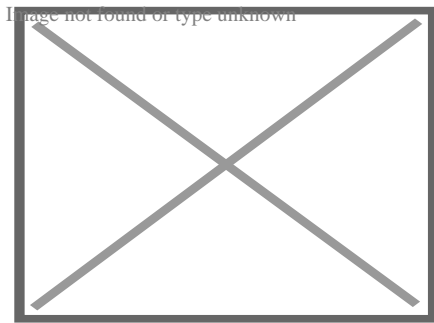


Typical stress strain curve for a drained dilatant soil

The shear strength and stiffness of soil determines whether or not soil will be stable or how much it will deform. Knowledge of the strength is necessary to determine if a slope will be stable, if a building or bridge might settle too far into the ground, and the limiting pressures on a retaining wall. It is important to distinguish between failure of a soil element and the failure of a geotechnical structure (e.g., a building foundation, slope or retaining wall); some soil elements may reach their peak strength prior to failure of the structure. Different criteria can be used to define the "shear strength" and the "yield point" for a soil element from a stress–strain curve. One may define the peak shear strength as the peak of a stress–strain curve, or the shear strength at critical state as the value after large strains when the shear resistance levels off. If the stress–strain curve does not stabilize before the end of shear strength test, the "strength" is sometimes considered to be the shear resistance at 15–20% strain.<sup>[14]</sup> The shear strength of soil depends on many factors including the effective stress and the void ratio.

The shear stiffness is important, for example, for evaluation of the magnitude of deformations of foundations and slopes prior to failure and because it is related to the shear wave velocity. The slope of the initial, nearly linear, portion of a plot of shear stress as a function of shear strain is called the shear modulus

## Friction, interlocking and dilation

[edit]

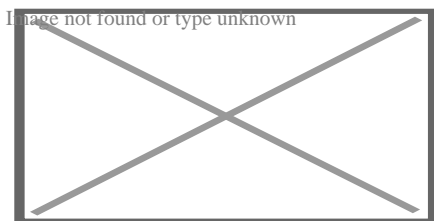


Angle of repose

Soil is an assemblage of particles that have little to no cementation while rock (such as sandstone) may consist of an assembly of particles that are strongly cemented together by chemical bonds. The shear strength of soil is primarily due to interparticle friction and therefore,

the shear resistance on a plane is approximately proportional to the effective normal stress on that plane.<sup>[3]</sup> The angle of internal friction is thus closely related to the maximum stable slope angle, often called the angle of repose.

But in addition to friction, soil derives significant shear resistance from interlocking of grains. If the grains are densely packed, the grains tend to spread apart from each other as they are subject to shear strain. The expansion of the particle matrix due to shearing was called dilatancy by Osborne Reynolds.<sup>[11]</sup> If one considers the energy required to shear an assembly of particles there is energy input by the shear force,  $T$ , moving a distance,  $x$  and there is also energy input by the normal force,  $N$ , as the sample expands a distance,  $y$ .<sup>[11]</sup> Due to the extra energy required for the particles to dilate against the confining pressures, dilatant soils have a greater peak strength than contractive soils. Furthermore, as dilative soil grains dilate, they become looser (their void ratio increases), and their rate of dilation decreases until they reach a critical void ratio. Contractive soils become denser as they shear, and their rate of contraction decreases until they reach a critical void ratio.

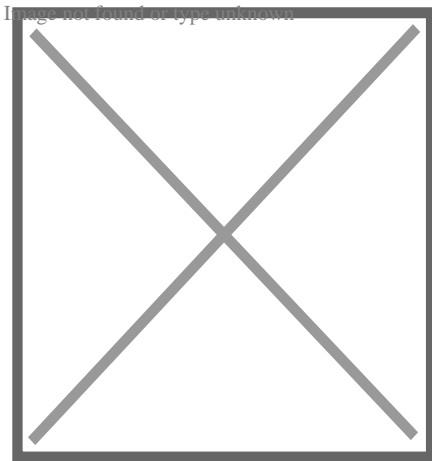

A critical state line separates the dilatant and contractive states for soil.

The tendency for a soil to dilate or contract depends primarily on the confining pressure and the void ratio of the soil. The rate of dilation is high if the confining pressure is small and the void ratio is small. The rate of contraction is high if the confining pressure is large and the void ratio is large. As a first approximation, the regions of contraction and dilation are separated by the critical state line.

## Failure criteria

[edit]

After a soil reaches the critical state, it is no longer contracting or dilating and the shear stress on the failure plane  $\tau_{crit}$  is determined by the effective normal stress on the failure plane  $\sigma_n$  and critical state friction angle  $\phi_{crit}$

$$\tau_{crit} = \sigma_n \tan \phi_{crit}$$



The peak strength of the soil may be greater, however, due to the interlocking (dilatancy) contribution. This may be stated:

$$\tau_{peak} = \sigma_n \tan \phi_{peak}$$

where  $\phi_{peak} > \phi_{crit}$ . However, use of a friction angle greater than the critical state value for design requires care. The peak strength will not be mobilized everywhere at the same time in a practical problem such as a foundation, slope or retaining wall. The critical state friction angle is not nearly as variable as the peak friction angle and hence it can be relied upon with confidence.<sup>[3][4][11]</sup>

Not recognizing the significance of dilatancy, Coulomb proposed that the shear strength of soil may be expressed as a combination of adhesion and friction components:<sup>[11]</sup>

$$\tau_f = c' + \sigma_f \tan \phi'$$

It is now known that the  $\phi'$  and  $c'$  parameters in the last equation are not fundamental soil properties.<sup>[3][6][11][16]</sup> In particular,  $\phi'$  and  $c'$  are different depending on the magnitude of effective stress.<sup>[6][16]</sup> According to Schofield (2006),<sup>[11]</sup> the longstanding use of  $c'$  in practice has led many engineers to wrongly believe that  $\phi'$  is a fundamental parameter. This assumption that  $\phi'$  and  $c'$  are constant can lead to overestimation of peak strengths.<sup>[3][16]</sup>


## Structure, fabric, and chemistry

[edit]

In addition to the friction and interlocking (dilatancy) components of strength, the structure and fabric also play a significant role in the soil behavior. The structure and fabric include factors such as the spacing and arrangement of the solid particles or the amount and spatial distribution of pore water; in some cases cementitious material accumulates at particle-particle contacts. Mechanical behavior of soil is affected by the density of the particles and their structure or arrangement of the particles as well as the amount and spatial distribution of fluids present (e.g., water and air voids). Other factors include the electrical charge of the particles, chemistry of pore water, chemical bonds (i.e. cementation -particles connected through a solid substance such as recrystallized calcium carbonate) <sup>[1][16]</sup>

## Drained and undrained shear

[edit]

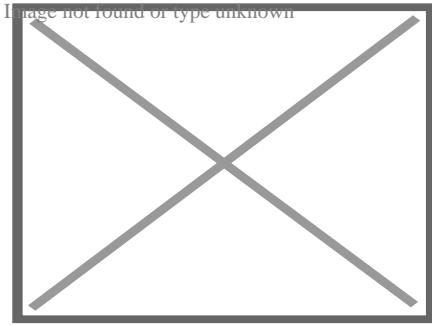

Moist sand along the shoreline is originally densely packed by the draining water. Foot pressure on the sand causes it to dilate (*see: Reynolds dilatancy*), drawing water from the surface into the pores.

The presence of nearly incompressible fluids such as water in the pore spaces affects the ability for the pores to dilate or contract.

If the pores are saturated with water, water must be sucked into the dilating pore spaces to fill the expanding pores (this phenomenon is visible at the beach when apparently dry spots form around feet that press into the wet sand).<sup>[clarification needed]</sup>

Similarly, for contractive soil, water must be squeezed out of the pore spaces to allow contraction to take place.

Dilation of the voids causes negative water pressures that draw fluid into the pores, and contraction of the voids causes positive pore pressures to push the water out of the pores. If the rate of shearing is very large compared to the rate that water can be sucked into or squeezed out of the dilating or contracting pore spaces, then the shearing is called *undrained shear*, if the shearing is slow enough that the water pressures are negligible, the shearing is called *drained shear*. During undrained shear, the water pressure  $u$  changes depending on volume change tendencies. From the effective stress equation, the change in  $u$  directly effects the effective stress by the equation:

$$\sigma' = \sigma - u,$$

and the strength is very sensitive to the effective stress. It follows then that the undrained shear strength of a soil may be smaller or larger than the drained shear strength depending upon whether the soil is contractive or dilative.

## Shear tests

[edit]

Strength parameters can be measured in the laboratory using direct shear test, triaxial shear test, simple shear test, fall cone test and (hand) shear vane test; there are numerous other devices and variations on these devices used in practice today. Tests conducted to characterize the strength and stiffness of the soils in the ground include the Cone penetration

test and the Standard penetration test.

## Other factors

[edit]

The stress–strain relationship of soils, and therefore the shearing strength, is affected by:[<sup>17</sup>]

1. *soil composition* (basic soil material): mineralogy, grain size and grain size distribution, shape of particles, pore fluid type and content, ions on grain and in pore fluid.
2. *state* (initial): Defined by the initial void ratio, effective normal stress and shear stress (stress history). State can be described by terms such as: loose, dense, overconsolidated, normally consolidated, stiff, soft, contractive, dilative, etc.
3. *structure*: Refers to the arrangement of particles within the soil mass; the manner in which the particles are packed or distributed. Features such as layers, joints, fissures, slickensides, voids, pockets, cementation, etc., are part of the structure. Structure of soils is described by terms such as: undisturbed, disturbed, remolded, compacted, cemented; flocculent, honey-combed, single-grained; flocculated, deflocculated; stratified, layered, laminated; isotropic and anisotropic.
4. *Loading conditions*: Effective stress path - drained, undrained, and type of loading - magnitude, rate (static, dynamic), and time history (monotonic, cyclic).

## Applications

[edit]

### Lateral earth pressure

[edit]

Main article: Lateral earth pressure

Lateral earth stress theory is used to estimate the amount of stress soil can exert perpendicular to gravity. This is the stress exerted on retaining walls. A lateral earth stress coefficient,  $K$ , is defined as the ratio of lateral (horizontal) effective stress to vertical effective stress for cohesionless soils ( $K = \sigma'_h / \sigma'_v$ ). There are three coefficients: at-rest, active, and passive. At-rest stress is the lateral stress in the ground before any disturbance takes place. The active stress state is reached when a wall moves away from the soil under the influence of lateral stress, and results from shear failure due to reduction of lateral stress. The passive stress state is reached when a wall is pushed into the soil far enough to cause shear failure within the mass due to increase of lateral stress. There are many theories for estimating lateral earth stress; some are empirically based, and some are analytically derived.

### Bearing capacity


[edit]

Main article: Bearing capacity

The bearing capacity of soil is the average contact stress between a foundation and the soil which will cause shear failure in the soil. Allowable bearing stress is the bearing capacity divided by a factor of safety. Sometimes, on soft soil sites, large settlements may occur under loaded foundations without actual shear failure occurring; in such cases, the allowable bearing stress is determined with regard to the maximum allowable settlement. It is important during construction and design stage of a project to evaluate the subgrade strength. The California Bearing Ratio (CBR) test is commonly used to determine the suitability of a soil as a subgrade for design and construction. The field Plate Load Test is commonly used to predict the deformations and failure characteristics of the soil/subgrade and modulus of subgrade reaction ( $k_s$ ). The Modulus of subgrade reaction ( $k_s$ ) is used in foundation design, soil-structure interaction studies and design of highway pavements.<sup>[*citation needed*]</sup>

## Slope stability

[edit]

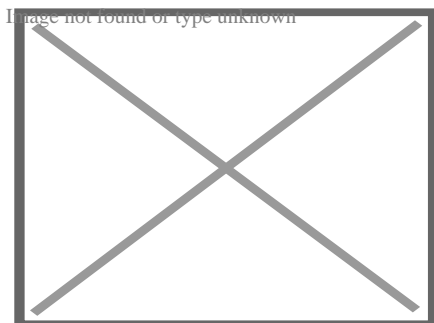

Simple slope slip section

Main article: Slope stability

The field of slope stability encompasses the analysis of static and dynamic stability of slopes of earth and rock-fill dams, slopes of other types of embankments, excavated slopes, and natural slopes in soil and soft rock.<sup>[18]</sup>

As seen to the right, earthen slopes can develop a cut-spherical weakness zone. The probability of this happening can be calculated in advance using a simple 2-D circular analysis package.<sup>[19]</sup> A primary difficulty with analysis is locating the most-probable slip plane for any given situation.<sup>[20]</sup> Many landslides have been analyzed only after the fact. Landslides vs. Rock strength are two factors for consideration.

## Recent developments

[edit]

A recent finding in soil mechanics is that soil deformation can be described as the behavior of a dynamical system. This approach to soil mechanics is referred to as Dynamical Systems based Soil Mechanics (DSSM). DSSM holds simply that soil deformation is a Poisson process in which particles move to their final position at random shear strains.

The basis of DSSM is that soils (including sands) can be sheared till they reach a steady-state condition at which, under conditions of constant strain-rate, there is no change in shear stress, effective confining stress, and void ratio. The steady-state was formally defined<sup>[21]</sup> by Steve J. Poulos Archived 2020-10-17 at the Wayback Machine an associate professor at the Soil Mechanics Department of Harvard University, who built off a hypothesis that Arthur Casagrande was formulating towards the end of his career. The steady state condition is not the same as the "critical state" condition. It differs from the critical state in that it specifies a statistically constant structure at the steady state. The steady-state values are also very slightly dependent on the strain-rate.

Many systems in nature reach steady states, and dynamical systems theory describes such systems. Soil shear can also be described as a dynamical system.<sup>[22][23]</sup> The physical basis of the soil shear dynamical system is a Poisson process in which particles move to the steady-state at random shear strains.<sup>[24]</sup> Joseph<sup>[25]</sup> generalized this—particles move to their final position (not just steady-state) at random shear-strains. Because of its origins in the steady state concept, DSSM is sometimes informally called "Harvard soil mechanics."

DSSM provides for very close fits to stress–strain curves, including for sands. Because it tracks conditions on the failure plane, it also provides close fits for the post failure region of sensitive clays and silts something that other theories are not able to do. Additionally DSSM explains key relationships in soil mechanics that to date have simply been taken for granted, for example, why normalized undrained peak shear strengths vary with the log of the overconsolidation ratio and why stress–strain curves normalize with the initial effective confining stress; and why in one-dimensional consolidation the void ratio must vary with the log of the effective vertical stress, why the end-of-primary curve is unique for static load increments, and why the ratio of the creep value  $C_{\alpha}$  to the compression index  $C_c$  must be approximately constant for a wide range of soils.<sup>[26]</sup>

## See also

[edit]

- Critical state soil mechanics
- Earthquake engineering
- Engineering geology
- Geotechnical centrifuge modeling
- Geotechnical engineering
- Geotechnical engineering (Offshore)
- Geotechnics

- Hydrogeology, aquifer characteristics closely related to soil characteristics
- International Society for Soil Mechanics and Geotechnical Engineering
- Rock mechanics
- Slope stability analysis

## References

[edit]

1. ^ **a b c d e f g h** Mitchell, J.K., and Soga, K. (2005) Fundamentals of soil behavior, Third edition, John Wiley and Sons, Inc., ISBN 978-0-471-46302-3
2. ^ **a b c d e f** Santamarina, J.C., Klein, K.A., & Fam, M.A. (2001). *Soils and Waves: Particulate Materials Behavior, Characterization and Process Monitoring*. Wiley. ISBN 978-0-471-49058-6.cite book: CS1 maint: multiple names: authors list (link).
3. ^ **a b c d e f g h i j k l** Powrie, W., Spon Press, 2004, *Soil Mechanics – 2nd ed* ISBN 0-415-31156-X
4. ^ **a b c d e f** A Guide to Soil Mechanics, Bolton, Malcolm, Macmillan Press, 1979. ISBN 0-333-18931-0
5. ^ *"Built Environment – Routledge"*. *Routledge.com*. Retrieved 2017-01-14.
6. ^ **a b c d e** Lambe, T. William & Robert V. Whitman. *Soil Mechanics*. Wiley, 1991; p. 29. ISBN 978-0-471-51192-2
7. ^ **a b c d** Guerriero V., Mazzoli S. (2021). "Theory of Effective Stress in Soil and Rock and Implications for Fracturing Processes: A Review". *Geosciences*. **11** (3): 119. Bibcode:2021Geosc..11..119G. doi:10.3390/geosciences11030119.
8. ^ ASTM Standard Test Methods of Particle-Size Distribution (Gradation) of Soils using Sieve Analysis. <http://www.astm.org/Standards/D6913.htm> Archived 2011-08-10 at the Wayback Machine
9. ^ *"Classification of Soils for Engineering Purposes: Annual Book of ASTM Standards"*. *D 2487-83*. **04** (8). American Society for Testing and Materials. 1985: 395–408. Archived from the original on 2010-09-14. Retrieved 2010-08-31. cite journal: Cite journal requires |journal= (help)
10. ^ **a b** Wood, David Muir, Soil Behavior and Critical State Soil Mechanics, Cambridge University Press, 1990, ISBN 0-521-33249-4
11. ^ **a b c d e f g** Disturbed soil properties and geotechnical design, Schofield, Andrew N., Thomas Telford, 2006. ISBN 0-7277-2982-9
12. ^ ASTM Standard Test Methods for Minimum Index Density and Unit Weight of Soils and Calculation of Relative Density. <http://www.astm.org/Standards/D4254.htm> Archived 2011-09-07 at the Wayback Machine
13. ^ Ozhovan, M.I.; Dmitriev, I.E.; Batyukhnova, O.G. (1993). "Fractal structure of pores in clay soil". *Atomic Energy*. **74** (3): 241–243. doi:10.1007/BF00739059. S2CID 95352427.
14. ^ **a b** Holtz, R.D, and Kovacs, W.D., 1981. An Introduction to Geotechnical Engineering. Prentice-Hall, Inc. page 448
15. ^ Terzaghi, K., 1943, *Theoretical Soil Mechanics*, John Wiley and Sons, New York

16. ^ **a b c d** Terzaghi, K., Peck, R.B., Mesri, G. (1996) Soil mechanics in Engineering Practice, Third Edition, John Wiley & Sons, Inc., ISBN 0-471-08658-4
17. ^ Poulos, S. J. 1989. Advance Dam Engineering for Design, Construction, and Rehabilitation: Liquefaction Related Phenomena. Ed. Jansen, R.B, Van Nostrand Reinhold, pages 292–297.
18. ^ *Slope Stability (PDF). Engineer Manual. Vol. EM 1110-2-1902. United States Army Corps of Engineers. 3 Oct 2003. Archived (PDF) from the original on 2016-12-29. Retrieved 2017-01-18.*
19. ^ "Slope Stability Calculator". Retrieved 2006-12-14.
20. ^ Chugh, A.K. (2002). "A method for locating critical slip surfaces in slope stability analysis: Discussion". *Canadian Geotechnical Journal*. **39** (3): 765–770. doi:10.1139/t02-042.
21. ^ Poulos, Steve J. (1981). "The Steady State of Deformation". *Journal of Geotechnical Engineering*. **107** (GT5): 553–562.
22. ^ Joseph, Paul G. (2009). "Constitutive Model of Soil Based on a Dynamical Systems Approach". *Journal of Geotechnical and Geoenvironmental Engineering*. **135** (8): 1155–1158. doi:10.1061/(asce)gt.1943-5606.0000001.
23. ^ Joseph, Paul G. (2010). "A Dynamical Systems Based Approach to Soil Shear". *Géotechnique*. **LX** (10): 807–812. Bibcode:2010Getq...60..807J. doi:10.1680/geot.9.p.001.
24. ^ Joseph, Paul G. (2012). "Physical Basis and Validation of a Constitutive Model for Soil Shear Derived from Micro-Structural Changes". *International Journal of Geomechanics*. **13** (4): 365–383. doi:10.1061/(asce)gm.1943-5622.0000209.
25. ^ Joseph, Paul G. (2014). "Generalised dynamical systems soil deformation model". *Geotechnical Research*. **1** (1): 32–42. Bibcode:2014GeotR...1...32J. doi:10.1680/geores.14.00004.
26. ^ Joseph, Paul G. (2017). *Dynamical Systems-Based Soil Mechanics (first ed.)*. CRC Press/Balkema. p. 138. ISBN 9781138723221. Archived from the original on 2018-03-24. Retrieved 2017-05-14.

## External links

[edit]

-  Media related to Soil mechanics at Wikimedia Commons


- v
- t
- e

Soil science

- History
- Index

## **Main fields**

- Pedology
- Edaphology
- Soil biology
- Soil microbiology
- Soil zoology
- Soil ecology
- Soil physics
- Soil mechanics
- Soil chemistry
- Environmental soil science
- Agricultural soil science





## **Soil topics**

- Soil
- Pedosphere
  - Soil morphology
  - Pedodiversity
  - Soil formation
- Soil erosion
- Soil contamination
- Soil retrogression and degradation
- Soil compaction
  - Soil compaction (agriculture)
- Soil sealing
- Soil salinity
  - Alkali soil
- Soil pH
  - Soil acidification
- Soil health
- Soil life
- Soil biodiversity
- Soil quality
- Soil value
- Soil fertility
- Soil resilience
- Soil color
- Soil texture
- Soil structure
  - Pore space in soil
  - Pore water pressure
- Soil crust
- Soil horizon
- Soil biomantle
- Soil carbon
- Soil gas
  - Soil respiration
- Soil organic matter
- Soil moisture
  - Soil water (retention)

- **v**
- **t**
- **e**

## Soil classification

### World Reference Base for Soil Resources (1998–)

- Acrisols
- Alisols
- Andosols
- Anthrosols
- Arenosols
- Calcisols
- Cambisols
- Chernozem
- Cryosols
- Durisols
- Ferralsols
- Fluvisols
- Gleysols
- Gypsisols
- Histosol
- Kastanozems
- Leptosols
- Lixisols
- Luvisols
- Nitisols
- Phaeozems
- Planosols
- Plinthosols
- Podzols
- Regosols
- Retisols
- Solonchaks
- Solonetz
- Stagnosol
- Technosols
- Umbrisols
- Vertisols

### USDA soil taxonomy

- Alfisols
- Andisols
- Aridisols
- Entisols
- Gelisols
- Histosols
- Inceptisols

## **Applications**

- Soil conservation
- Soil management
- Soil guideline value
- Soil survey
- Soil test
- Soil governance
- Soil value
- Soil salinity control
- Erosion control
- Agroecology
- Liming (soil)

## **Related fields**

- Geology
- Geochemistry
- Petrology
- Geomorphology
- Geotechnical engineering
- Hydrology
- Hydrogeology
- Biogeography
- Earth materials
- Archaeology
- Agricultural science
  - Agrology

## **Societies, Initiatives**




- Australian Society of Soil Science Incorporated
- Canadian Society of Soil Science
- Central Soil Salinity Research Institute (India)
- German Soil Science Society
- Indian Institute of Soil Science
- International Union of Soil Sciences
- International Year of Soil
- National Society of Consulting Soil Scientists (US)
- OPAL Soil Centre (UK)
- Soil Science Society of Poland
- Soil and Water Conservation Society (US)
- Soil Science Society of America
- World Congress of Soil Science

## Scientific journals

- *Acta Agriculturae Scandinavica B*
- *Journal of Soil and Water Conservation*
- *Plant and Soil*
- *Pochvovedenie*
- *Soil Research*
- *Soil Science Society of America Journal*

## See also

- Land use
- Land conversion
- Land management
- Vegetation
- Infiltration (hydrology)
- Groundwater
- Crust (geology)
- Impervious surface/Surface runoff
- Petrichor

-  [Wikipedia:WikiProject Soil](#)
-  [Category soil](#)
- [Category soil science](#)
-  [List of soil scientists](#)





















- **v**
- **t**
- **e**

Geotechnical engineering

Offshore geotechnical engineering

## Investigation and instrumentation

### Field (*in situ*)

-  Core drill
-  Cone penetration test
-  Geo-electrical sounding
-  Permeability test
-  Load test
  - Static
  - Dynamic
  - Statnamic
-  Pore pressure measurement
  - Piezometer
  - Well
-  Ram sounding
-  Rock control drilling
-  Rotary-pressure sounding
-  Rotary weight sounding
-  Sample series
-  Screw plate test
- Deformation monitoring
  -  Inclinator
  -  Settlement recordings
-  Shear vane test
-  Simple sounding
-  Standard penetration test
-  Total sounding
-  Trial pit
-  Visible bedrock
- Nuclear densometer test
- Exploration geophysics
- Crosshole sonic logging

## Soil

### Types

- Clay
- Silt
- Sand
- Gravel
- Peat
- Loam
- Loess

### Properties

- Hydraulic conductivity
- Water content
- Void ratio
- Bulk density
- Thixotropy
- Reynolds' dilatancy
- Angle of repose
- Friction angle
- Cohesion
- Porosity
- Permeability
- Specific storage
- Shear strength
- Sensitivity

**Structures  
(Interaction)**

Natural features

- Topography
- Vegetation
- Terrain
- Topsoil
- Water table
- Bedrock
- Subgrade
- Subsoil

Earthworks

- Shoring structures
  - Retaining walls
  - Gabion
  - Ground freezing
  - Mechanically stabilized earth
  - Pressure grouting
  - Slurry wall
  - Soil nailing
  - Tieback
- Land development
- Landfill
- Excavation
- Trench
- Embankment
- Cut
- Causeway
- Terracing
- Cut-and-cover
- Cut and fill
- Fill dirt
- Grading
- Land reclamation
- Track bed
- Erosion control
- Earth structure
- Expanded clay aggregate
- Crushed stone
- Geosynthetics
  - Geotextile
  - Geomembrane
  - Geosynthetic clay liner
  - Cellular confinement
- Infiltration

Foundations

- Shallow
- Deep

## Forces

- Effective stress
- Pore water pressure
- Lateral earth pressure
- Overburden pressure
- Preconsolidation pressure

## Mechanics

### Phenomena/ problems

- Permafrost
- Frost heaving
- Consolidation
- Compaction
- Earthquake
  - Response spectrum
  - Seismic hazard
  - Shear wave
- Landslide analysis
  - Stability analysis
  - Mitigation
  - Classification
  - Sliding criterion
  - Slab stabilisation
- Bearing capacity \* Stress distribution in soil

## Numerical analysis software

- SEEP2D
- STABL
- SVFlux
- SVSlope
- UTEXAS
- Plaxis



## Related fields

- Geology
- Geochemistry
- Petrology
- Earthquake engineering
- Geomorphology
- Soil science
- Hydrology
- Hydrogeology
- Biogeography
- Earth materials
- Archaeology
- Agricultural science
  - Agrology

Authority control databases: National              

[Edit this at Wikidata](#)

- Germany
- United States
- France
- Japan
- Czech Republic
- Israel

## About Cook County

### Photo

Image not found or type unknown

### Photo

Image not found or type unknown

### Photo

Image not found or type unknown

### Photo

Image not found or type unknown

## Things To Do in Cook County

---

### Photo

## **Sand Ridge Nature Center**

**4.8 (96)**

### **Photo**

Image not found or type unknown

## **River Trail Nature Center**

**4.6 (235)**

### **Photo**

Image not found or type unknown

## **Palmisano (Henry) Park**

**4.7 (1262)**

## **Driving Directions in Cook County**

---

**Driving Directions From Palmisano (Henry) Park to**

## Driving Directions From Lake Katherine Nature Center and Botanic Gardens to

## Driving Directions From Navy Pier to

<https://www.google.com/maps/dir/Navy+Pier/United+Structural+Systems+of+Illinois%2C-87.6050944,14z/data=!3m1!4b1!4m14!4m13!1m5!1m1!1sunknown!2m2!1d-87.6050944!2d41.8918633!1m5!1m1!1sChIJ-wSxDtinD4gRiv4kY3RRh9U!2m2!1d-88.1396465!2d42.0637725!3e0>

<https://www.google.com/maps/dir/Lake+Katherine+Nature+Center+and+Botanic+Gardens%2C-87.8010774,14z/data=!3m1!4b1!4m14!4m13!1m5!1m1!1sunknown!2m2!1d-87.8010774!2d41.6776048!1m5!1m1!1sChIJ-wSxDtinD4gRiv4kY3RRh9U!2m2!1d-88.1396465!2d42.0637725!3e2>

<https://www.google.com/maps/dir/Palmisano+%28Henry%29+Park/United+Structural+Systems+of+Illinois%2C-87.6490151,14z/data=!3m1!4b1!4m14!4m13!1m5!1m1!1sunknown!2m2!1d-87.6490151!2d41.8429903!1m5!1m1!1sChIJ-wSxDtinD4gRiv4kY3RRh9U!2m2!1d-88.1396465!2d42.0637725!3e1>

## Reviews for



found or type unknown

**Jeffery James**

**(5)**

Very happy with my experience. They were prompt and followed through, and very helpful in fixing the crack in my foundation.




found or type unknown

**Sarah McNeily**

**(5)**

USS was excellent. They are honest, straightforward, trustworthy, and conscientious. They thoughtfully removed the flowers and flower bulbs to dig where they needed in the yard, replanted said flowers and spread the extra dirt to fill in


an area of the yard. We've had other services from different companies and our yard was really a mess after. They kept the job site meticulously clean. The crew was on time and friendly. I'd recommend them any day! Thanks to Jessie and crew.



**Jim de Leon**

**(5)**


It was a pleasure to work with Rick and his crew. From the beginning, Rick listened to my concerns and what I wished to accomplish. Out of the 6 contractors that quoted the project, Rick seemed the MOST willing to accommodate my wishes. His pricing was definitely more than fair as well. I had 10 push piers installed to stabilize and lift an addition of my house. The project commenced at the date that Rick had disclosed initially and it was completed within the same time period expected (based on Rick's original assessment). The crew was well informed, courteous, and hard working. They were not loud (even while equipment was being utilized) and were well spoken. My neighbors were very impressed on how polite they were when they entered / exited my property (saying hello or good morning each day when they crossed paths). You can tell they care about the customer concerns. They ensured that the property would be put back as clean as possible by placing MANY sheets of plywood down prior to excavating. They compacted the dirt back in the holes extremely well to avoid large stock piles of soils. All the while, the main office was calling me to discuss updates and expectations of completion. They provided waivers of lien, certificates of insurance, properly acquired permits, and JULIE locates. From a construction background, I can tell you that I did not see any flaws in the way they operated and this an extremely professional company. The pictures attached show the push piers added to the foundation (pictures 1, 2 & 3), the amount of excavation (picture 4), and the restoration after dirt was placed back in the pits and compacted (pictures 5, 6 & 7). Please notice that they also sealed two large cracks and steel plated these cracks from expanding further (which you can see under my sliding glass door). I, as well as my wife, are extremely happy that we chose United Structural Systems for our contractor. I would happily tell any of my friends and family to use this contractor should the opportunity arise!



**Chris Abplanalp**

**(5)**

USS did an amazing job on my underpinning on my house, they were also very courteous to the proximity of my property line next to my neighbor. They kept things in order with all the dirt/mud they had to excavate. They were done exactly in the timeframe they indicated, and the contract was very details oriented with drawings of what would be done. Only thing that would have been nice, is they left my concrete a little muddy with boot prints but again, all-in-all a great job



**Dave Kari**

**(5)**

What a fantastic experience! Owner Rick Thomas is a trustworthy professional. Nick and the crew are hard working, knowledgeable and experienced. I interviewed every company in the area, big and small. A homeowner never wants to hear that they have foundation issues. Out of every company, I trusted USS the most, and it paid off in the end. Highly recommend.

Enhancing Overall Site Drainage with Gravel Trenches [View GBP](#)

United Structural Systems of Illinois, Inc

Phone : +18473822882

City : Hoffman Estates

State : IL

Zip : 60169

Address : 2124 Stonington Ave

### **Google Business Profile**

Company Website : <https://www.unitedstructuralsystems.com/>

### **USEFUL LINKS**

### **Residential Foundation Repair Services**

### **home foundation repair service**

### **Foundation Repair Service**

### **Sitemap**

### **Privacy Policy**

### **About Us**

