



- **Understanding Expansive Clay and Its Impact on Foundations**
Understanding Expansive Clay and Its Impact on Foundations Examining Sandy Loam for Residential Support Identifying Areas Vulnerable to Soil Erosion Evaluating Soil Moisture Fluctuations Beneath Homes Approaches for Chemical Soil Stabilization Techniques for Addressing Soil Heave Issues Managing Settlement with Targeted Soil Compaction Recognizing Soil Drainage Limitations Investigating Soil Stress Testing in Residential Sites Incorporating Root Barriers to Prevent Shifts Examining Seasonal Swelling and Shrinking of Soil Employing Sustainable Methods for Long Term Soil Health
- **Planning French Drains for Effective Water Control**
Planning French Drains for Effective Water Control Setting Up Sump Pumps to Prevent Basement Flooding Extending Gutter Downspouts for Extra Protection Excavation Basics for Residential Construction Projects Coordinating Soil Compaction Methods on Site Limiting Erosion Through Proper Grading Techniques Evaluating Perimeter Drain Systems for Dry Foundations Installing Exterior Waterproof Barriers for Walls Adapting Site Plans to Local Rainfall Patterns Understanding Swale Placement for Controlled Water Flow Enhancing Overall Site Drainage with Gravel Trenches Minimizing Subsurface Water Accumulation Around Foundations
- **About Us**



Detailed explanation of sandy loam soil characteristics and properties

Sandy loam soil is a type of soil that gardeners and homeowners often seek after due to its balanced composition and numerous benefits for plant growth and residential landscaping. Hiring a certified contractor ensures proper foundation repair methods are used **professional slab foundation repair service** building insulation. Understanding its characteristics and properties is essential for anyone considering it for their property.

Sandy loam soil is a mixture that typically consists of sand, silt, and clay in relatively even proportion, though with a slight dominance of sand. This combination gives it unique properties that make it favorable for both agricultural and residential uses.

One of the key characteristics of sandy loam soil is its texture. It feels gritty yet slightly smooth when rubbed between your fingers, indicative of the sand and silt components. This texture allows for excellent drainage, which is crucial for preventing waterlogging and root rot in plants. The sand particles are large enough to create spaces between them, facilitating the easy flow of water and air. This makes sandy loam soil ideal for areas prone to heavy rainfall or for plants that do not thrive in soggy conditions.

Another important property of sandy loam soil is its workability. Due to its balanced composition, this soil type is easy to till and cultivate. It warms up quickly in the spring, allowing for earlier planting seasons. However, its loose structure also means it can be prone to erosion, especially on sloped areas. Implementing erosion control measures such as planting ground cover or using mulch can help mitigate this issue.

Sandy loam soil is also known for its low nutrient content. While this might seem like a drawback, it allows gardeners to have better control over the soil's fertility by adding specific amendments tailored to their plants' needs. Organic matter, such as compost or well-rotted manure, can be incorporated to improve nutrient levels and enhance soil structure.

Moreover, sandy loam soil's pH level tends to be slightly acidic to neutral, which is suitable for a wide range of plant species. However, regular soil testing is recommended to monitor pH levels and make necessary adjustments with lime or sulfur if needed.

In residential settings, sandy loam soil supports a variety of landscaping projects. Its excellent drainage makes it perfect for lawns, gardens, and even athletic fields. The soil's ability to warm up quickly in the spring also benefits early-season vegetables and flowers.

In conclusion, sandy loam soil offers a blend of beneficial characteristics and properties that make it an excellent choice for residential support. Its well-draining texture, ease of workability, and controllable fertility provide a solid foundation for successful gardening and landscaping endeavors. With proper management and care, sandy loam soil can enhance the beauty and functionality of any home landscape.

Analysis of how sandy loam soil impacts residential foundation stability

Sandy loam soil is a mixed soil type composed primarily of sand, silt, and clay particles. Due to its composition, it exhibits a unique set of properties that can significantly impact the stability of residential foundations. Understanding these effects is crucial for ensuring long-term structural integrity in residential constructions.

One of the primary characteristics of sandy loam soil is its relatively high permeability. This means that water can easily pass through it, which can lead to issues such as soil erosion over time. When water seeps through the soil and accumulates beneath a foundation, it can cause the soil to expand and become less stable. This phenomenon, known as soil heave, can exert pressure on the foundation, potentially leading to cracks and structural instability.

Additionally, sandy loam soil tends to have lower cohesion compared to other soil types, such as clay. Cohesion refers to the ability of soil particles to stick together. Lower cohesion means that the soil particles are more likely to move independently, especially when subjected to external forces like water flow or vibrations from nearby construction activities. This lack of cohesion can undermine the foundation, making it more susceptible to shifting or settling unevenly.

Another factor to consider is the impact of seasonal changes on sandy loam soil. During wet seasons, the soil may absorb a significant amount of water, causing it to swell. Conversely, during dry seasons, the soil can shrink as it loses moisture. These volume changes can exert varying pressures on the foundation, leading to differential settlement—a situation where different parts of the foundation settle at different rates. This can result in structural stress and, over time, may lead to visible cracks in walls and floors.

To mitigate these risks, engineers and builders often employ specific strategies when constructing on sandy loam soil. One common approach is the use of deeper foundations, such as piles or caissons, which extend below the active zone of soil movement. This helps distribute the weight of the structure more evenly and reduces the impact of soil expansion and contraction.

Additionally, proper drainage systems are essential to manage water flow around the foundation. French drains, for example, can redirect water away from the foundation, minimizing the risk of soil saturation and associated heave.

In conclusion, sandy loam soil presents unique challenges for residential foundation stability due to its high permeability, lower cohesion, and susceptibility to seasonal volume changes. By understanding these properties and implementing appropriate engineering solutions, it is possible to construct stable and durable residential structures even on this type of soil. Careful planning and execution are key to ensuring long-term structural integrity and peace of mind for homeowners.

Common issues faced by homes built on sandy loam soil

When it comes to building homes, the type of soil on which they are constructed plays a crucial role in their stability and longevity. Sandy loam soil, a mixture of sand, silt, and a smaller amount of clay, is often seen as a favorable option due to its balanced composition. However, homes built on sandy loam soil can face a unique set of challenges that homeowners and builders need to be aware of.

One of the most common issues with sandy loam soil is its tendency to erode. Unlike clay soils, which are more cohesive, sandy loam soil can be easily washed away by heavy rains or strong winds. This erosion can undermine the foundation of a home, leading to cracks in walls, uneven floors, and other structural problems. To mitigate this risk, proper drainage systems must be installed around the property to redirect water away from the foundation.

Another challenge is the soil's susceptibility to shifting. Sandy loam soil doesn't hold water as well as clay soils, which means it can dry out and shrink during periods of drought. Conversely, it can become saturated and expand when it rains heavily. This constant expansion and contraction can put stress on a home's foundation, leading to settlement issues. Builders often use specialized foundation techniques, such as pier and beam or slab-on-grade, to accommodate these movements.

Moreover, sandy loam soil can be less supportive than other soil types, making it harder to achieve a stable foundation. This is particularly problematic in areas prone to earthquakes or other seismic activities. To address this, engineers may opt for deeper foundations or use additional reinforcement materials to ensure the home remains secure.

Lastly, sandy loam soil can be more difficult to work with during construction. Its loose nature means it doesn't compact as well as other soils, which can lead to uneven settling over time. This requires careful planning and execution during the building process to ensure the home remains level and stable.

In conclusion, while sandy loam soil offers certain advantages for home construction, it also presents unique challenges that must be carefully managed. From erosion and shifting to foundation stability and construction difficulties, homeowners and builders alike need to be well-informed about these issues to ensure a safe and durable living environment.

Techniques and methods for assessing sandy loam soil in residential areas

Assessing sandy loam soil in residential areas is crucial for ensuring the stability and safety of homes and other structures. Sandy loam soil, a mixture of sand, silt, and a smaller amount of clay, offers unique challenges and benefits for construction and gardening. Here are some techniques and methods used to evaluate this type of soil effectively.

Firstly, soil sampling is a fundamental technique. This involves taking samples from various depths and locations within the property to get a comprehensive understanding of the soil composition. The samples are then analyzed in a laboratory to determine the proportions of sand, silt, and clay, as well as other important factors like pH, organic matter content, and

nutrient levels.

Another essential method is the use of a soil penetrometer. This device measures the soil's resistance to penetration, providing insights into its compactness and load-bearing capacity. This information is vital for determining whether the soil can support the weight of a house or other structures without settling or shifting.

Infiltration tests are also commonly used to assess sandy loam soil. These tests measure how quickly water permeates the soil, which is important for understanding drainage capabilities. Poor drainage can lead to waterlogging, which can undermine the stability of foundations and promote the growth of mold and mildew.

Additionally, performing a percolation test can provide valuable data on the soil's ability to absorb and filter water. This test is particularly important in areas where septic systems are used, as it ensures that the soil can handle the effluent without contaminating groundwater.

Lastly, employing geospatial technology, such as drones and Geographic Information Systems (GIS), can offer a broader perspective on the soil conditions across a residential area. These tools can map variations in soil types and properties, helping to identify potential problem areas before construction begins.

In conclusion, assessing sandy loam soil in residential areas requires a multi-faceted approach that combines traditional sampling and testing methods with modern technology. By understanding the unique properties of sandy loam soil, homeowners and builders can make informed decisions that ensure the longevity and safety of residential structures.

Effective strategies for repairing foundations on sandy loam soil

When it comes to building a sturdy residential foundation, the type of soil beneath plays a crucial role. Sandy loam soil, a mixture of sand, silt, and a smaller amount of clay, presents unique challenges and opportunities for foundation repair. Understanding the properties of sandy loam and employing effective strategies can ensure a stable and durable foundation.

Firstly, it's important to recognize that sandy loam soil drains well but may not offer the same level of structural support as clay or loam soils. This characteristic means that foundations built on sandy loam are more susceptible to shifting and settling. To counteract this, one effective strategy is to use a deeper foundation. By extending the depth of the footings, the structure can reach more stable soil layers beneath the sandy loam, reducing the risk of movement.

Another strategy involves the use of piers or piles. These are driven deep into the ground until they reach a stable soil layer or bedrock. Piers can be made from concrete, steel, or wood, and they provide additional support to the foundation, helping to distribute the weight of the structure more evenly. This method is particularly useful in areas where the sandy loam is particularly loose or prone to erosion.

Soil stabilization is another critical technique. This can be achieved through methods like compaction, where the soil is densely packed to increase its load-bearing capacity. Adding materials like lime or cement can also stabilize the soil, improving its strength and reducing its permeability. This is especially beneficial in sandy loam, which can be prone to water infiltration and erosion.

Regular maintenance and monitoring are also vital. Homeowners should keep an eye on any signs of foundation movement, such as cracks in walls or floors, sticking doors, or uneven floors. Early detection of issues can lead to more straightforward and less costly repairs.

In conclusion, repairing foundations on sandy loam soil requires a combination of deep footings, additional support structures like piers, soil stabilization techniques, and vigilant maintenance. By understanding the unique properties of sandy loam and employing these effective strategies, homeowners can ensure their residential foundations remain stable and secure for years to come.

Case studies showcasing successful foundation repairs on sandy loam soil

Certainly! Examining sandy loam for residential support through case studies on successful foundation repairs is a fascinating and practical approach to understanding the complexities of this soil type. Sandy loam, a mixture of sand, silt, and a smaller amount of clay, presents unique challenges and opportunities for foundation construction and repair. Let's delve into a few illustrative case studies that highlight effective strategies for stabilizing foundations on sandy loam soil.

In one notable case, a residential home in a suburban area faced significant foundation issues due to the shifting nature of the sandy loam beneath it. The homeowners noticed cracks in the walls and uneven floors, classic signs of foundation distress. After a thorough soil analysis, engineers determined that the sandy loam's susceptibility to erosion and shifting under water pressure was the primary cause. To address this, they employed a combination of techniques including the installation of helical piers and the implementation of a comprehensive drainage system around the property. The helical piers, which are screw-like supports driven deep into the ground until they reach stable soil, effectively transferred the home's load to more stable layers beneath the sandy loam. Meanwhile, the drainage system was designed to redirect water away from the foundation, reducing the risk of soil erosion and subsequent foundation movement. The result was a stabilized foundation and a relieved homeowner, showcasing the effectiveness of a tailored approach to sandy loam soil challenges.

Another compelling case study involves a multi-story residential building constructed on sandy loam soil. The building experienced differential settlement, where different parts of the structure settled at different rates, leading to structural stress and cosmetic damage. The repair strategy here involved underpinning the foundation with concrete piles. This method involved drilling holes beneath the existing foundation and filling them with concrete, effectively creating a deeper, more stable foundation. The sandy loam's loose structure

required careful management to avoid destabilizing the soil further during the drilling process. Through meticulous planning and execution, the building's foundation was successfully underpinned, eliminating the differential settlement and ensuring the structure's long-term stability.

These case studies underscore the importance of understanding the specific characteristics of sandy loam soil when addressing foundation issues. They demonstrate that with the right approach-whether it's through the use of helical piers, comprehensive drainage systems, or concrete underpinning-successful repairs and stabilizations are achievable. These examples not only provide valuable insights for homeowners and engineers facing similar challenges but also highlight the importance of innovative and tailored solutions in the realm of residential foundation repair on sandy loam soil.



About foundation

image not found or type unknown



Look up ***foundation*** or ***foundations*** in Wiktionary, the free dictionary.

Foundation(s) or **The Foundation(s)** may refer to:

Common uses

[edit]

- Foundation (cosmetics), a skin-coloured makeup cream applied to the face
- Foundation (engineering), the element of a structure which connects it to the ground, and transfers loads from the structure to the ground
- Foundation (evidence), a legal term
- Foundation (nonprofit), a type of charitable organization
 - Foundation (United States law), a type of charitable organization in the U.S.
 - Private foundation, a charitable organization that might not qualify as a public charity by government standards

Arts, entertainment, and media

[edit]

Film and TV

[edit]

- *The Foundation*, a film about 1960s-1970s Aboriginal history in Sydney, featuring Gary Foley
- *The Foundation* (1984 TV series), a Hong Kong series
- *The Foundation* (Canadian TV series), a 2009–2010 Canadian sitcom
- "The Foundation" (*Seinfeld*), an episode
- *Foundation* (TV series), an Apple TV+ series adapted from Isaac Asimov's novels

Games

[edit]

- *Foundation* (video game), a city-building game (2025)
- *Foundation*, an Amiga video game
- The Foundation, a character in 2017 game *Fortnite Battle Royale*

Literature

[edit]

- Foundation (book series), a series of science fiction books by Isaac Asimov
 - *Foundation* (Asimov novel), the first book in Asimov's series, published in 1951
- *Foundation* (b-boy book), by Joseph G. Schloss
- *Foundation* (Lackey novel), a 2008 fantasy novel by Mercedes Lackey

Music

[edit]

- The Foundations, a British soul group
- Foundations (EP), by Serj Tankian

Albums

[edit]

- *Foundation* (Brand Nubian album)
- *Foundation* (Breakage album)
- *Foundation* (Doc Watson album)
- *Foundation* (Magnum album)
- *Foundation* (M.O.P. album)
- *Foundation*, a 1997 compilation album by Die Krupps
- *The Foundation* (Geto Boys album)
- *The Foundation* (Pep Love album), 2005
- *The Foundation* (Zac Brown Band album)
- *The Foundations* (album), by 4 Corners

Songs

[edit]

- "Foundation", a 1983 song by Spandau Ballet from the album *True*
- "Foundation", a 1998 song by Brand Nubian from the eponymous album *Foundation*
- "Foundation", a 2009 song by M.O.P. from the eponymous album *Foundation*
- "Foundation", a 2010 song by Breakage from the eponymous album *Foundation*
- "Foundation", a 2015 song by Years & Years from *Communion*
- "Foundations" (song), by Kate Nash
- "The Foundation" (song), by Xzibit

Other uses in arts, entertainment, and media

[edit]

- *Foundation – The International Review of Science Fiction*, a literary journal
- *The Foundation Trilogy* (BBC Radio), a radio adaption of Asimov's series
- The SCP Foundation, a fictional organization that is often referred to in-universe as "The Foundation"

Education

[edit]

- Foundation degree, a British academic qualification
- Foundation school, a type of school in England and Wales
- Foundation Stage, a stage of education for children aged 3 to 5 in England
- University Foundation Programme, a British university entrance course

Science and technology

[edit]

- Foundation (framework), a free collection of tools for creating websites and web applications by ZURB
- Foundation Fieldbus, a communications system
- Foundation Kit, an Apple API

Companies

[edit]

- Foundation Medicine, a genomic profiling company

See also

[edit]


- All pages with titles beginning with *Foundation*
- All pages with titles beginning with *The Foundation*
- Foundations of mathematics, theory of mathematics


Disambiguation icon

This disambiguation page lists articles associated with the title **Foundation**.


If an internal link led you here, you may wish to change the link to point directly to the intended article.

About soil mechanics


 This article may be too long to read and navigate comfortably. Consider splitting content into sub-articles, condensing it, or adding subheadings. Please discuss this issue on the article's talk page. (*February 2025*)

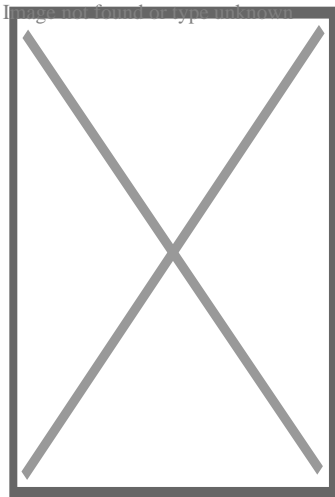


The Leaning Tower of Pisa – an example of a problem due to deformation of soil

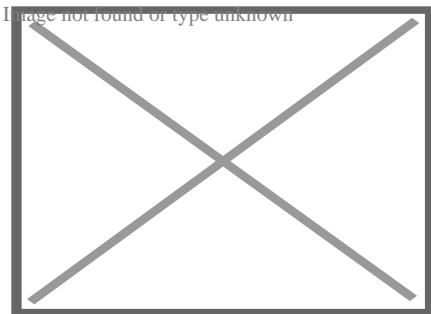

Slope instability issues for a temporary flood control levee in North Dakota, 2009

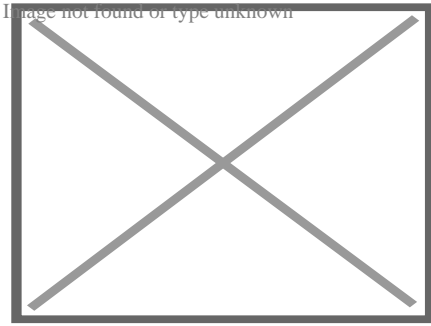

Earthwork in Germany

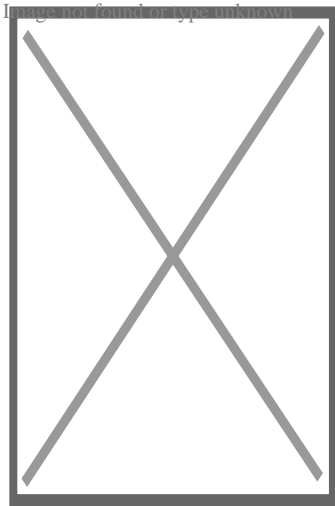

Fox Glacier, New Zealand: Soil produced and transported by intense weathering and erosion

Soil mechanics is a branch of soil physics and applied mechanics that describes the behavior of soils. It differs from fluid mechanics and solid mechanics in the sense that soils consist of a heterogeneous mixture of fluids (usually air and water) and particles (usually clay, silt, sand, and gravel) but soil may also contain organic solids and other matter. [1][2][3][4] Along with rock mechanics, soil mechanics provides the theoretical basis for analysis in geotechnical engineering, [5] a subdiscipline of civil engineering, and engineering geology, a subdiscipline of geology. Soil mechanics is used to analyze the deformations of and flow of fluids within natural and man-made structures that are supported on or made of soil, or structures that are buried in soils. [6] Example applications are building and bridge foundations, retaining walls, dams, and buried pipeline systems. Principles of soil mechanics are also used in related disciplines such as geophysical engineering, coastal engineering, agricultural engineering, and hydrology.

This article describes the genesis and composition of soil, the distinction between *pore water pressure* and inter-granular *effective stress*, capillary action of fluids in the soil pore spaces, *soil classification*, *seepage* and *permeability*, time dependent change of volume due to squeezing water out of tiny pore spaces, also known as *consolidation*, *shear strength* and stiffness of soils. The shear strength of soils is primarily derived from friction between the particles and interlocking, which are very sensitive to the effective stress. [7][6] The article

concludes with some examples of applications of the principles of soil mechanics such as slope stability, lateral earth pressure on retaining walls, and bearing capacity of foundations.

Genesis and composition of soils

[edit]

Genesis

[edit]

The primary mechanism of soil creation is the weathering of rock. All rock types (igneous rock, metamorphic rock and sedimentary rock) may be broken down into small particles to create soil. Weathering mechanisms are physical weathering, chemical weathering, and biological weathering [1][2][3] Human activities such as excavation, blasting, and waste disposal, may also create soil. Over geologic time, deeply buried soils may be altered by pressure and temperature to become metamorphic or sedimentary rock, and if melted and solidified again, they would complete the geologic cycle by becoming igneous rock. [3]

Physical weathering includes temperature effects, freeze and thaw of water in cracks, rain, wind, impact and other mechanisms. Chemical weathering includes dissolution of matter composing a rock and precipitation in the form of another mineral. Clay minerals, for example can be formed by weathering of feldspar, which is the most common mineral present in igneous rock.

The most common mineral constituent of silt and sand is quartz, also called silica, which has the chemical name silicon dioxide. The reason that feldspar is most common in rocks but silica is more prevalent in soils is that feldspar is much more soluble than silica.


Silt, Sand, and Gravel are basically little pieces of broken rocks.

According to the Unified Soil Classification System, silt particle sizes are in the range of 0.002 mm to 0.075 mm and sand particles have sizes in the range of 0.075 mm to 4.75 mm.

Gravel particles are broken pieces of rock in the size range 4.75 mm to 100 mm. Particles larger than gravel are called cobbles and boulders. [1][2]

Transport

[edit]

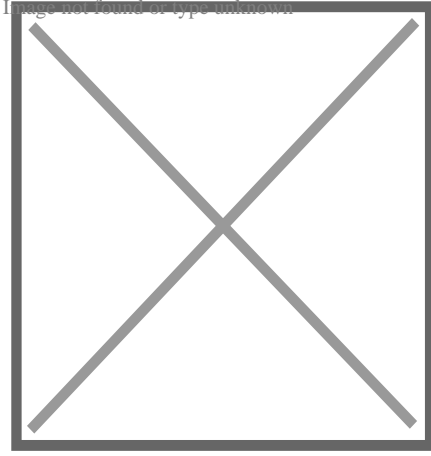

Example soil horizons. a) top soil and colluvium b) mature residual soil c) young residual soil d) weathered rock

Soil deposits are affected by the mechanism of transport and deposition to their location. Soils that are not transported are called residual soils—they exist at the same location as the rock from which they were generated. Decomposed granite is a common example of a residual soil. The common mechanisms of transport are the actions of gravity, ice, water, and wind. Wind blown soils include dune sands and loess. Water carries particles of different size depending on the speed of the water, thus soils transported by water are graded according to their size. Silt and clay may settle out in a lake, and gravel and sand collect at the bottom of a river bed. Wind blown soil deposits (aeolian soils) also tend to be sorted according to their grain size. Erosion at the base of glaciers is powerful enough to pick up large rocks and boulders as well as soil; soils dropped by melting ice can be a well graded mixture of widely varying particle sizes. Gravity on its own may also carry particles down from the top of a mountain to make a pile of soil and boulders at the base; soil deposits transported by gravity are called colluvium.^{[1][2]}

The mechanism of transport also has a major effect on the particle shape. For example, low velocity grinding in a river bed will produce rounded particles. Freshly fractured colluvium particles often have a very angular shape.

Soil composition

[edit]

Soil mineralogy

[edit]

Silts, sands and gravels are classified by their size, and hence they may consist of a variety of minerals. Owing to the stability of quartz compared to other rock minerals, quartz is the most common constituent of sand and silt. Mica, and feldspar are other common minerals present in sands and silts.^[1] The mineral constituents of gravel may be more similar to that of the parent rock.

The common clay minerals are montmorillonite or smectite, illite, and kaolinite or kaolin. These minerals tend to form in sheet or plate like structures, with length typically ranging between $10^{?7}$ m and $4 \times 10^{?6}$ m and thickness typically ranging between $10^{?9}$ m and $2 \times 10^{?6}$ m, and they have a relatively large specific surface area. The specific surface area (SSA) is defined as the ratio of the surface area of particles to the mass of the particles. Clay minerals typically have specific surface areas in the range of 10 to 1,000 square meters per gram of solid.^[3] Due to the large surface area available for chemical, electrostatic, and van der Waals interaction, the mechanical behavior of clay minerals is very sensitive to the amount of pore fluid available and the type and amount of dissolved ions in the pore fluid.^[1]

The minerals of soils are predominantly formed by atoms of oxygen, silicon, hydrogen, and aluminum, organized in various crystalline forms. These elements along with calcium, sodium, potassium, magnesium, and carbon constitute over 99 per cent of the solid mass of soils.^[1]

Grain size distribution

[edit]


Main article: Soil gradation

Soils consist of a mixture of particles of different size, shape and mineralogy. Because the size of the particles obviously has a significant effect on the soil behavior, the grain size and grain size distribution are used to classify soils. The grain size distribution describes the relative proportions of particles of various sizes. The grain size is often visualized in a cumulative distribution graph which, for example, plots the percentage of particles finer than a given size as a function of size. The median grain size, $\displaystyle d_{50}$, which 50% of the particle mass consists of finer particles. Soil behavior, especially the hydraulic conductivity, tends to be dominated by the smaller particles, hence, the term "effective size", denoted by $\displaystyle d_{10}$ the size for which 10% of the particle mass consists of finer particles.

Sands and gravels that possess a wide range of particle sizes with a smooth distribution of particle sizes are called *well graded* soils. If the soil particles in a sample are predominantly in a relatively narrow range of sizes, the sample is *uniformly graded*. If a soil sample has distinct gaps in the gradation curve, e.g., a mixture of gravel and fine sand, with no coarse sand, the sample may be *gap graded*. *Uniformly graded* and *gap graded* soils are both considered to be *poorly graded*. There are many methods for measuring particle-size distribution. The two traditional methods are sieve analysis and hydrometer analysis.

Sieve analysis

[edit]

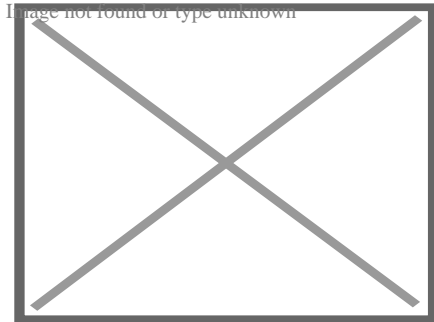

Sieve

The size distribution of gravel and sand particles are typically measured using sieve analysis. The formal procedure is described in ASTM D6913-04(2009).^[8] A stack of sieves with accurately dimensioned holes between a mesh of wires is used to separate the particles into size bins. A known volume of dried soil, with clods broken down to individual particles, is put into the top of a stack of sieves arranged from coarse to fine. The stack of sieves is shaken for a standard period of time so that the particles are sorted into size bins. This method works reasonably well for particles in the sand and gravel size range. Fine particles tend to stick to each other, and hence the sieving process is not an effective method. If there are a lot of fines (silt and clay) present in the soil it may be necessary to run water through the sieves to wash the coarse particles and clods through.

A variety of sieve sizes are available. The boundary between sand and silt is arbitrary. According to the Unified Soil Classification System, a #4 sieve (4 openings per inch) having 4.75 mm opening size separates sand from gravel and a #200 sieve with an 0.075 mm opening separates sand from silt and clay. According to the British standard, 0.063 mm is the boundary between sand and silt, and 2 mm is the boundary between sand and gravel.^[3]

Hydrometer analysis

[edit]


The classification of fine-grained soils, i.e., soils that are finer than sand, is determined primarily by their Atterberg limits, not by their grain size. If it is important to determine the grain size distribution of fine-grained soils, the hydrometer test may be performed. In the hydrometer tests, the soil particles are mixed with water and shaken to produce a dilute suspension in a glass cylinder, and then the cylinder is left to sit. A hydrometer is used to measure the density of the suspension as a function of time. Clay particles may take several

hours to settle past the depth of measurement of the hydrometer. Sand particles may take less than a second. Stokes' law provides the theoretical basis to calculate the relationship between sedimentation velocity and particle size. ASTM provides the detailed procedures for performing the Hydrometer test.

Clay particles can be sufficiently small that they never settle because they are kept in suspension by Brownian motion, in which case they may be classified as colloids.

Mass-volume relations

[edit]

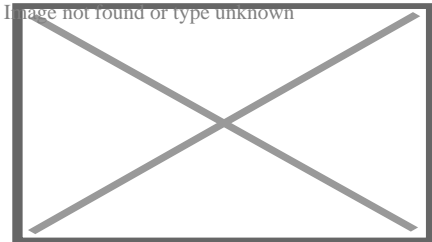

A phase diagram of soil indicating the masses and volumes of air, solid, water, and voids

There are a variety of parameters used to describe the relative proportions of air, water and solid in a soil. This section defines these parameters and some of their interrelationships. [2][6] The basic notation is as follows:

V_a , V_w , and V_s represent the volumes of air, water and solids in a soil mixture;

W_a , W_w , and W_s represent the weights of air, water and solids in a soil mixture;

M_a , M_w , and M_s represent the masses of air, water and solids in a soil mixture;

ρ_a , ρ_w , and ρ_s represent the densities of the constituents (air, water and solids) in a soil mixture;

Note that the weights, W , can be obtained by multiplying the mass, M , by the acceleration due to gravity, g ; e.g., $W_s = M_s g$

Specific Gravity is the ratio of the density of one material compared to the density of pure water ($\rho_w = 1 \text{ g/cm}^3$)

$$G_s = \frac{\rho_s}{\rho_w}$$

Specific gravity of solids, Image not found or type unknown

Note that specific weight, conventionally denoted by the symbol γ , may be obtained by multiplying the density (ρ) of a material by the acceleration due to gravity, g .

Density, bulk density, or wet density, ρ , are different names for the density of the mixture, i.e., the total mass of air, water, solids divided by the total volume of air water and solids (the mass of air is assumed to be zero for practical purposes):

$$\rho = \frac{M_s + M_w}{V_s + V_w + V_a} = \frac{M_t}{V_t}$$

Image not found or type unknown

Dry density, ρ_d , is the mass of solids divided by the total volume of air water and solids:

$$\rho_d = \frac{M_s}{V_s + V_w + V_a} = \frac{M_s}{V_t}$$

Image not found or type unknown

Buoyant density, ρ' , defined as the density of the mixture minus the density of water is useful if the soil is submerged under water:

$$\rho' = \rho - \rho_w$$

Image not found or type unknown

where ρ_w is the density of water

Water content, w , is the ratio of mass of water to mass of solid. It is easily measured by weighing a sample of the soil, drying it out in an oven and re-weighing. Standard procedures are described by ASTM.

$$w = \frac{M_w}{M_s} = \frac{W_w}{W_s}$$

Image not found or type unknown

Void ratio, e , is the ratio of the volume of voids to the volume of solids:

$$e = \frac{V_v}{V_s} = \frac{V_v}{V_t - V_v} = \frac{n}{1-n}$$

Image not found or type unknown

Porosity, n , is the ratio of volume of voids to the total volume, and is related to the void ratio:

$$n = \frac{V_v}{V_t} = \frac{V_v}{V_s + V_v} = \frac{e}{1+e}$$

Image not found or type unknown

Degree of saturation, S , is the ratio of the volume of water to the volume of voids:

$$S = \frac{V_w}{V_v}$$

Image not found or type unknown

From the above definitions, some useful relationships can be derived by use of basic algebra.

$$\rho = \frac{(G_s + Se)\rho_w}{1 + e}$$

Image not found or type unknown

$$\rho = \frac{(1 + w)G_s\rho_w}{1 + e}$$

Image not found or type unknown

$$w = \frac{Se}{G_s}$$

Image not found or type unknown

Soil classification

[edit]

Geotechnical engineers classify the soil particle types by performing tests on disturbed (dried, passed through sieves, and remolded) samples of the soil. This provides information about the characteristics of the soil grains themselves. Classification of the types of grains present in a soil does not ^[clarification needed] account for important effects of the *structure* or *fabric* of the soil, terms that describe compactness of the particles and patterns in the arrangement of particles in a load carrying framework as well as the pore size and pore fluid distributions. Engineering geologists also classify soils based on their genesis and depositional history.

Classification of soil grains

[edit]

In the US and other countries, the Unified Soil Classification System (USCS) is often used for soil classification. Other classification systems include the British Standard BS 5930 and the AASHTO soil classification system.^[3]

Classification of sands and gravels

[edit]

In the USCS, gravels (given the symbol *G*) and sands (given the symbol *S*) are classified according to their grain size distribution. For the USCS, gravels may be given the classification symbol *GW* (well-graded gravel), *GP* (poorly graded gravel), *GM* (gravel with a large amount of silt), or *GC* (gravel with a large amount of clay). Likewise sands may be classified as being *SW*, *SP*, *SM* or *SC*. Sands and gravels with a small but non-negligible

amount of fines (5–12%) may be given a dual classification such as *SW-SC*.

Atterberg limits

[edit]

Clays and Silts, often called 'fine-grained soils', are classified according to their Atterberg limits; the most commonly used Atterberg limits are the *liquid limit* (denoted by *LL* or ω_L) and *plastic limit* (denoted by *PL* or ω_P) and *shrinkage limit* (denoted by *SL*).

The liquid limit is the water content at which the soil behavior transitions from a plastic solid to a liquid. The plastic limit is the water content at which the soil behavior transitions from that of a plastic solid to a brittle solid. The Shrinkage Limit corresponds to a water content below which the soil will not shrink as it dries. The consistency of fine grained soil varies in proportional to the water content in a soil.

As the transitions from one state to another are gradual, the tests have adopted arbitrary definitions to determine the boundaries of the states. The liquid limit is determined by measuring the water content for which a groove closes after 25 blows in a standard test. [9] [clarification needed] Alternatively, a fall cone test apparatus may be used to measure the liquid limit. The undrained shear strength of remolded soil at the liquid limit is approximately 2 kPa. [4] [10] The plastic limit is the water content below which it is not possible to roll by hand the soil into 3 mm diameter cylinders. The soil cracks or breaks up as it is rolled down to this diameter. Remolded soil at the plastic limit is quite stiff, having an undrained shear strength of the order of about 200 kPa. [4] [10]

The *plasticity index* of a particular soil specimen is defined as the difference between the liquid limit and the plastic limit of the specimen; it is an indicator of how much water the soil particles in the specimen can absorb, and correlates with many engineering properties like permeability, compressibility, shear strength and others. Generally, the clay having high plasticity have lower permeability and also they are also difficult to be compacted.

Classification of silts and clays

[edit]

According to the Unified Soil Classification System (USCS), silts and clays are classified by plotting the values of their plasticity index and liquid limit on a plasticity chart. The A-Line on the chart separates clays (given the USCS symbol *C*) from silts (given the symbol *M*). $LL=50\%$ separates high plasticity soils (given the modifier symbol *H*) from low plasticity soils (given the modifier symbol *L*). A soil that plots above the A-line and has $LL>50\%$ would, for example, be classified as *CH*. Other possible classifications of silts and clays are *ML*, *CL* and

MH. If the Atterberg limits plot in the "hatched" region on the graph near the origin, the soils are given the dual classification 'CL-ML'.

Indices related to soil strength

[edit]

Liquidity index

[edit]

The effects of the water content on the strength of saturated remolded soils can be quantified by the use of the *liquidity index*, *LI*:

$$LI = \frac{w - P_{LL}}{P_{LL} - P_L}$$

Image not found or type unknown

When the LI is 1, remolded soil is at the liquid limit and it has an undrained shear strength of about 2 kPa. When the soil is at the plastic limit, the LI is 0 and the undrained shear strength is about 200 kPa.^[4]^[11]

Relative density

[edit]

The density of sands (cohesionless soils) is often characterized by the relative density, D_r .

$$D_r = \frac{e_{max} - e - e_{min}}{e_{max} - e_{min}} 100\%$$

Image not found or type unknown

where: e_{max} is the "maximum void ratio" corresponding to a very loose state, e_{min} is the "minimum void ratio" corresponding to a very dense state and e is the in situ void ratio.


Methods used to calculate relative density are defined in ASTM D4254-00(2006).^[12]

Thus if $D_r = 100\%$ the sand or gravel is very dense, and if $D_r = 0\%$ the soil is extremely loose and unstable.

Seepage: steady state flow of water

[edit]

This section is an excerpt from Seepage.^[edit]

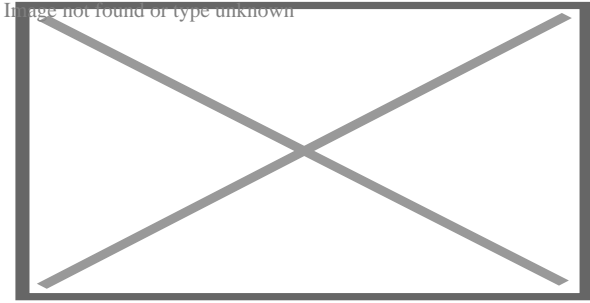


A cross section showing the water table varying with surface topography as well as a perched water table

In soil mechanics, seepage is the movement of water through soil. If fluid pressures in a soil deposit are uniformly increasing with depth according to $\gamma_w z$, where z is the depth below the water table, then hydrostatic conditions will prevail and the fluids will *not* be flowing through the soil. However, if the water table is sloping or there is a perched water table as indicated in the accompanying sketch, then seepage will occur. For steady state seepage, the seepage velocities are not varying with time. If the water tables are changing levels with time, or if the soil is in the process of consolidation, then steady state conditions do not apply.

Effective stress and capillarity: hydrostatic conditions

[edit]

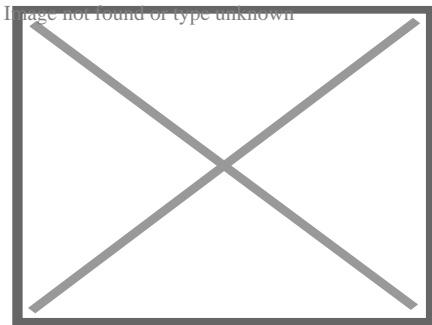

Spheres immersed in water, reducing effective stress

Main article: Effective stress

To understand the mechanics of soils it is necessary to understand how normal stresses and shear stresses are shared by the different phases. Neither gas nor liquid provide significant resistance to shear stress. The shear resistance of soil is provided by friction and interlocking of the particles. The friction depends on the intergranular contact stresses between solid particles. The normal stresses, on the other hand, are shared by the fluid and the particles.^[7] Although the pore air is relatively compressible, and hence takes little normal stress in most geotechnical problems, liquid water is relatively incompressible and if the voids are saturated with water, the pore water must be squeezed out in order to pack the particles closer together.

The principle of effective stress, introduced by Karl Terzaghi, states that the effective stress σ' (i.e., the average intergranular stress between solid particles) may be calculated by a simple subtraction of the pore pressure from the total stress:

$$\sigma' = \sigma - u,$$

where σ is the total stress and u is the pore pressure. It is not practical to measure σ' directly, so in practice the vertical effective stress is calculated from the pore pressure and vertical total stress. The distinction between the terms pressure and stress is also important. By definition, pressure at a point is equal in all directions but stresses at a point can be different in different directions. In soil mechanics, compressive stresses and pressures are considered to be positive and tensile stresses are considered to be negative, which is different from the solid mechanics sign convention for stress.

Total stress

[edit]

For level ground conditions, the total vertical stress at a point, σ_v , on average, is the weight of everything above that point per unit area. The vertical stress beneath a uniform surface layer with density ρ and thickness H is given by the example:

$$\sigma_v = \rho gH = \gamma H$$

where g is the acceleration due to gravity, and γ is the unit weight of the overlying layer. If there are multiple layers of soil or water above the point of interest, the vertical stress may be calculated by summing the product of the unit weight and thickness of all of the overlying layers. Total stress increases with increasing depth in proportion to the density of the overlying soil.

It is not possible to calculate the horizontal total stress in this way. Lateral earth pressures are addressed elsewhere.


Pore water pressure

[edit]

Main article: Pore water pressure

Hydrostatic conditions

[edit]

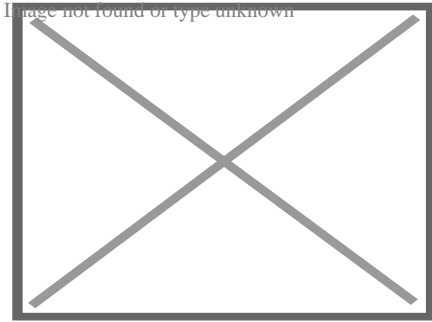

Water is drawn into a small tube by surface tension. Water pressure, u , is negative above and positive below the free water surface.

If the soil pores are filled with water that is not flowing but is static, the pore water pressures will be hydrostatic. The water table is located at the depth where the water pressure is equal to the atmospheric pressure. For hydrostatic conditions, the water pressure increases linearly with depth below the water table:

$$u = \rho_w g z_w$$

where ρ_w is the density of water, and z_w is the depth below the water table.

Capillary action

[edit]

Due to surface tension, water will rise up in a small capillary tube above a free surface of water. Likewise, water will rise up above the water table into the small pore spaces around the soil particles. In fact the soil may be completely saturated for some distance above the water table. Above the height of capillary saturation, the soil may be wet but the water content will decrease with elevation. If the water in the capillary zone is not moving, the water pressure obeys the equation of hydrostatic equilibrium, $u = \rho_w g z_w$, but note that z_w is negative above the water table. Hence, hydrostatic water pressures are negative above the water table. The thickness of the zone of capillary saturation depends on the pore size, but typically, the heights vary between a centimeter or so for coarse sand to tens of meters for a silt or clay. [3] In fact the pore space of soil is a uniform fractal e.g. a set of uniformly distributed D-dimensional fractals of average linear size L . For the clay soil it has been found that $L=0.15$ mm and $D=2.7$. [13]

The surface tension of water explains why the water does not drain out of a wet sand castle or a moist ball of clay. Negative water pressures make the water stick to the particles and pull

the particles to each other, friction at the particle contacts make a sand castle stable. But as soon as a wet sand castle is submerged below a free water surface, the negative pressures are lost and the castle collapses. Considering the effective stress equation, $\sigma' = \sigma - u$, if the water pressure is negative, the effective stress may be positive, even on a free surface (a surface where the total normal stress is zero). The negative pore pressure pulls the particles together and causes compressive particle to particle contact forces. Negative pore pressures in clayey soil can be much more powerful than those in sand. Negative pore pressures explain why clay soils shrink when they dry and swell as they are wetted. The swelling and shrinkage can cause major distress, especially to light structures and roads.^[14]

Later sections of this article address the pore water pressures for seepage and consolidation problems.

Water at particle contacts

○

Image not found or type unknown

**Water at
particle
contacts**

- Intergranular contact force due to surface tension

Image not found or type unknown

**Intergranular
contact force due
to surface tension
Shrinkage caused by drying**

○

Image not found or type unknown


**Shrinkage caused
by drying**

Consolidation: transient flow of water

[edit]

Main article: Consolidation (soil)

Image not found or type unknown

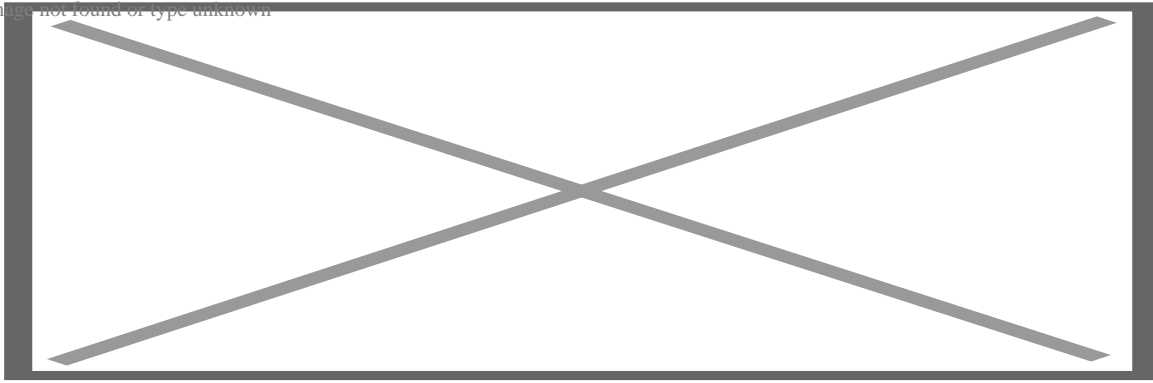

Consolidation analogy. The piston is supported by water underneath and a spring. When a load is applied to the piston, water pressure increases to support the load. As the water slowly leaks through the small hole, the load is transferred from the water pressure to the spring force.


Consolidation is a process by which soils decrease in volume. It occurs when stress is applied to a soil that causes the soil particles to pack together more tightly, therefore reducing volume. When this occurs in a soil that is saturated with water, water will be squeezed out of the soil. The time required to squeeze the water out of a thick deposit of clayey soil layer might be years. For a layer of sand, the water may be squeezed out in a matter of seconds. A building foundation or construction of a new embankment will cause the soil below to consolidate and this will cause settlement which in turn may cause distress to the building or embankment. Karl Terzaghi developed the theory of one-dimensional consolidation which enables prediction of the amount of settlement and the time required for the settlement to occur. [15] Afterwards, Maurice Biot fully developed the three-dimensional soil consolidation theory, extending the one-dimensional model previously developed by Terzaghi to more general hypotheses and introducing the set of basic equations of Poroelasticity. [7] Soils are tested with an oedometer test to determine their compression index and coefficient of consolidation.

When stress is removed from a consolidated soil, the soil will rebound, drawing water back into the pores and regaining some of the volume it had lost in the consolidation process. If the stress is reapplied, the soil will re-consolidate again along a recompression curve, defined by the recompression index. Soil that has been consolidated to a large pressure and has been subsequently unloaded is considered to be *overconsolidated*. The maximum past vertical effective stress is termed the *preconsolidation stress*. A soil which is currently experiencing the maximum past vertical effective stress is said to be *normally consolidated*. The *overconsolidation ratio*, (OCR) is the ratio of the maximum past vertical effective stress to the current vertical effective stress. The OCR is significant for two reasons: firstly, because the compressibility of normally consolidated soil is significantly larger than that for overconsolidated soil, and secondly, the shear behavior and dilatancy of clayey soil are related to the OCR through critical state soil mechanics; highly overconsolidated clayey soils are dilatant, while normally consolidated soils tend to be contractive. [2][3][4]

Shear behavior: stiffness and strength

[edit]

Main article: shear strength (soil)

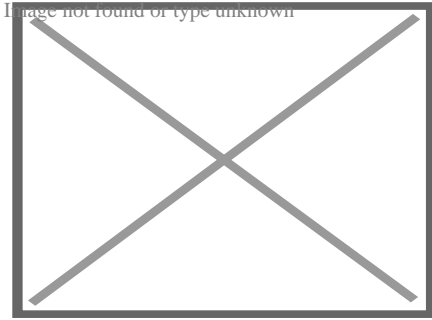


Typical stress strain curve for a drained dilatant soil

The shear strength and stiffness of soil determines whether or not soil will be stable or how much it will deform. Knowledge of the strength is necessary to determine if a slope will be stable, if a building or bridge might settle too far into the ground, and the limiting pressures on a retaining wall. It is important to distinguish between failure of a soil element and the failure of a geotechnical structure (e.g., a building foundation, slope or retaining wall); some soil elements may reach their peak strength prior to failure of the structure. Different criteria can be used to define the "shear strength" and the "yield point" for a soil element from a stress–strain curve. One may define the peak shear strength as the peak of a stress–strain curve, or the shear strength at critical state as the value after large strains when the shear resistance levels off. If the stress–strain curve does not stabilize before the end of shear strength test, the "strength" is sometimes considered to be the shear resistance at 15–20% strain.^[14] The shear strength of soil depends on many factors including the effective stress and the void ratio.

The shear stiffness is important, for example, for evaluation of the magnitude of deformations of foundations and slopes prior to failure and because it is related to the shear wave velocity. The slope of the initial, nearly linear, portion of a plot of shear stress as a function of shear strain is called the shear modulus

Friction, interlocking and dilation


[edit]

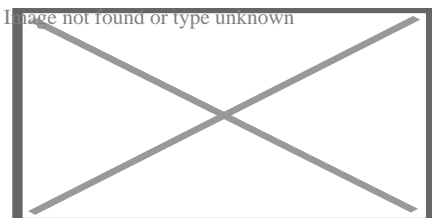

Angle of repose

Soil is an assemblage of particles that have little to no cementation while rock (such as sandstone) may consist of an assembly of particles that are strongly cemented together by chemical bonds. The shear strength of soil is primarily due to interparticle friction and therefore, the shear resistance on a plane is approximately proportional to the effective normal stress on that plane.^[3] The angle of internal friction is thus closely related to the maximum stable slope angle, often called the angle of repose.

But in addition to friction, soil derives significant shear resistance from interlocking of grains. If the grains are densely packed, the grains tend to spread apart from each other as they are subject to shear strain. The expansion of the particle matrix due to shearing was called dilatancy by Osborne Reynolds.^[11] If one considers the energy required to shear an assembly of particles there is energy input by the shear force, T , moving a distance, x and there is also energy input by the normal force, N , as the sample expands a distance, y .^[11] Due to the extra energy required for the particles to dilate against the confining pressures, dilatant soils have a greater peak strength than contractive soils. Furthermore, as dilative soil grains dilate, they become looser (their void ratio increases), and their rate of dilation decreases until they reach a critical void ratio. Contractive soils become denser as they shear, and their rate of contraction decreases until they reach a critical void ratio.

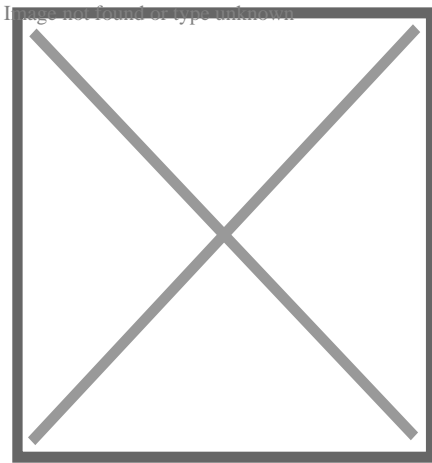

A critical state line separates the dilatant and contractive states for soil.

The tendency for a soil to dilate or contract depends primarily on the confining pressure and the void ratio of the soil. The rate of dilation is high if the confining pressure is small and the void ratio is small. The rate of contraction is high if the confining pressure is large and the void ratio is large. As a first approximation, the regions of contraction and dilation are separated by the critical state line.

Failure criteria

[edit]

After a soil reaches the critical state, it is no longer contracting or dilating and the shear stress on the failure plane τ_{crit} is determined by the effective normal stress on the failure plane σ_n and critical state friction angle ϕ_{crit}

$$\tau_{crit} = \sigma_n \tan \phi_{crit}$$

The peak strength of the soil may be greater, however, due to the interlocking (dilatancy) contribution. This may be stated:

$$\tau_{peak} = \sigma_n \tan \phi_{peak}$$

where $\phi_{peak} > \phi_{crit}$. However, use of a friction angle greater than the critical state value for design requires care. The peak strength will not be mobilized everywhere at the same time in a practical problem such as a foundation, slope or retaining wall. The critical state friction angle is not nearly as variable as the peak friction angle and hence it can be relied upon with confidence.^{[3][4][11]}

Not recognizing the significance of dilatancy, Coulomb proposed that the shear strength of soil may be expressed as a combination of adhesion and friction components:^[11]

$$\tau_f = c + \sigma_f \tan \phi$$

It is now known that the ϕ and c parameters in the last equation are not fundamental soil properties.^{[3][6][11][16]} In particular, ϕ and c are different depending on the magnitude of effective stress.^{[6][16]} According to Schofield (2006),^[11] the longstanding use of c has led many engineers to wrongly believe that c is a fundamental parameter. This assumption that ϕ and c are constant can lead to overestimation of peak strengths.^{[3][16]}

Structure, fabric, and chemistry


[edit]

In addition to the friction and interlocking (dilatancy) components of strength, the structure and fabric also play a significant role in the soil behavior. The structure and fabric include factors such as the spacing and arrangement of the solid particles or the amount and spatial distribution of pore water; in some cases cementitious material accumulates at particle-particle contacts. Mechanical behavior of soil is affected by the density of the particles and their structure or arrangement of the particles as well as the amount and spatial distribution of fluids present (e.g., water and air voids). Other factors include the electrical charge of the particles, chemistry of pore water, chemical bonds (i.e. cementation -particles connected

through a solid substance such as recrystallized calcium carbonate) [1][16]

Drained and undrained shear

[edit]

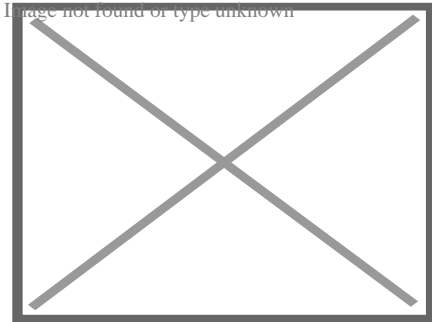

Moist sand along the shoreline is originally densely packed by the draining water. Foot pressure on the sand causes it to dilate (see: *Reynolds dilatancy*), drawing water from the surface into the pores.

The presence of nearly incompressible fluids such as water in the pore spaces affects the ability for the pores to dilate or contract.

If the pores are saturated with water, water must be sucked into the dilating pore spaces to fill the expanding pores (this phenomenon is visible at the beach when apparently dry spots form around feet that press into the wet sand). ^[clarification needed]

Similarly, for contractive soil, water must be squeezed out of the pore spaces to allow contraction to take place.

Dilation of the voids causes negative water pressures that draw fluid into the pores, and contraction of the voids causes positive pore pressures to push the water out of the pores. If the rate of shearing is very large compared to the rate that water can be sucked into or squeezed out of the dilating or contracting pore spaces, then the shearing is called *undrained shear*, if the shearing is slow enough that the water pressures are negligible, the shearing is called *drained shear*. During undrained shear, the water pressure u changes depending on volume change tendencies. From the effective stress equation, the change in u directly effects the effective stress by the equation:

$$\sigma' = \sigma - u,$$

and the strength is very sensitive to the effective stress. It follows then that the undrained shear strength of a soil may be smaller or larger than the drained shear strength depending upon whether the soil is contractive or dilative.

Shear tests

[edit]

Strength parameters can be measured in the laboratory using direct shear test, triaxial shear test, simple shear test, fall cone test and (hand) shear vane test; there are numerous other devices and variations on these devices used in practice today. Tests conducted to characterize the strength and stiffness of the soils in the ground include the Cone penetration test and the Standard penetration test.

Other factors

[edit]

The stress–strain relationship of soils, and therefore the shearing strength, is affected by: ^[17]

1. *soil composition* (basic soil material): mineralogy, grain size and grain size distribution, shape of particles, pore fluid type and content, ions on grain and in pore fluid.
2. *state* (initial): Defined by the initial void ratio, effective normal stress and shear stress (stress history). State can be described by terms such as: loose, dense, overconsolidated, normally consolidated, stiff, soft, contractive, dilative, etc.
3. *structure*: Refers to the arrangement of particles within the soil mass; the manner in which the particles are packed or distributed. Features such as layers, joints, fissures, slickensides, voids, pockets, cementation, etc., are part of the structure. Structure of soils is described by terms such as: undisturbed, disturbed, remolded, compacted, cemented; flocculent, honey-combed, single-grained; flocculated, deflocculated; stratified, layered, laminated; isotropic and anisotropic.
4. *Loading conditions*: Effective stress path - drained, undrained, and type of loading - magnitude, rate (static, dynamic), and time history (monotonic, cyclic).

Applications

[edit]

Lateral earth pressure

[edit]

Main article: Lateral earth pressure

Lateral earth stress theory is used to estimate the amount of stress soil can exert perpendicular to gravity. This is the stress exerted on retaining walls. A lateral earth stress coefficient, K , is defined as the ratio of lateral (horizontal) effective stress to vertical effective stress for cohesionless soils ($K = \sigma'_h / \sigma'_v$). There are three coefficients: at-rest, active, and passive. At-rest stress is the lateral stress in the ground before any disturbance takes place. The active stress state is reached when a wall moves away from the soil under the influence of lateral stress, and results from shear failure due to reduction of lateral stress. The passive stress state is reached when a wall is pushed into the soil far enough to cause shear failure within the mass due to increase of lateral stress. There are many theories for estimating lateral earth stress; some are empirically based, and some are analytically derived.

Bearing capacity


[edit]

Main article: Bearing capacity

The bearing capacity of soil is the average contact stress between a foundation and the soil which will cause shear failure in the soil. Allowable bearing stress is the bearing capacity divided by a factor of safety. Sometimes, on soft soil sites, large settlements may occur under loaded foundations without actual shear failure occurring; in such cases, the allowable bearing stress is determined with regard to the maximum allowable settlement. It is important during construction and design stage of a project to evaluate the subgrade strength. The California Bearing Ratio (CBR) test is commonly used to determine the suitability of a soil as a subgrade for design and construction. The field Plate Load Test is commonly used to predict the deformations and failure characteristics of the soil/subgrade and modulus of subgrade reaction (k_s). The Modulus of subgrade reaction (k_s) is used in foundation design, soil-structure interaction studies and design of highway pavements. ^[*citation needed*]

Slope stability

[edit]

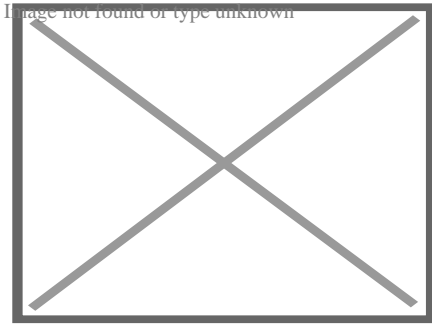

Simple slope slip section

Main article: Slope stability

The field of slope stability encompasses the analysis of static and dynamic stability of slopes of earth and rock-fill dams, slopes of other types of embankments, excavated slopes, and natural slopes in soil and soft rock.^[18]

As seen to the right, earthen slopes can develop a cut-spherical weakness zone. The probability of this happening can be calculated in advance using a simple 2-D circular analysis package.^[19] A primary difficulty with analysis is locating the most-probable slip plane for any given situation.^[20] Many landslides have been analyzed only after the fact. Landslides vs. Rock strength are two factors for consideration.

Recent developments

[edit]

A recent finding in soil mechanics is that soil deformation can be described as the behavior of a dynamical system. This approach to soil mechanics is referred to as Dynamical Systems based Soil Mechanics (DSSM). DSSM holds simply that soil deformation is a Poisson process in which particles move to their final position at random shear strains.

The basis of DSSM is that soils (including sands) can be sheared till they reach a steady-state condition at which, under conditions of constant strain-rate, there is no change in shear stress, effective confining stress, and void ratio. The steady-state was formally defined^[21] by Steve J. Poulos Archived 2020-10-17 at the Wayback Machine an associate professor at the Soil Mechanics Department of Harvard University, who built off a hypothesis that Arthur Casagrande was formulating towards the end of his career. The steady state condition is not the same as the "critical state" condition. It differs from the critical state in that it specifies a statistically constant structure at the steady state. The steady-state values are also very slightly dependent on the strain-rate.

Many systems in nature reach steady states, and dynamical systems theory describes such systems. Soil shear can also be described as a dynamical system.^{[22][23]} The physical basis of the soil shear dynamical system is a Poisson process in which particles move to the steady-

state at random shear strains.^[24] Joseph^[25] generalized this—particles move to their final position (not just steady-state) at random shear-strains. Because of its origins in the steady state concept, DSSM is sometimes informally called "Harvard soil mechanics."

DSSM provides for very close fits to stress–strain curves, including for sands. Because it tracks conditions on the failure plane, it also provides close fits for the post failure region of sensitive clays and silts something that other theories are not able to do. Additionally DSSM explains key relationships in soil mechanics that to date have simply been taken for granted, for example, why normalized undrained peak shear strengths vary with the log of the overconsolidation ratio and why stress–strain curves normalize with the initial effective confining stress; and why in one-dimensional consolidation the void ratio must vary with the log of the effective vertical stress, why the end-of-primary curve is unique for static load increments, and why the ratio of the creep value C_{α} to the compression index C_c must be approximately constant for a wide range of soils.^[26]

See also

[edit]

- Critical state soil mechanics
- Earthquake engineering
- Engineering geology
- Geotechnical centrifuge modeling
- Geotechnical engineering
- Geotechnical engineering (Offshore)
- Geotechnics
- Hydrogeology, aquifer characteristics closely related to soil characteristics
- International Society for Soil Mechanics and Geotechnical Engineering
- Rock mechanics
- Slope stability analysis

References

[edit]

1. [^] ***a b c d e f g h*** Mitchell, J.K., and Soga, K. (2005) Fundamentals of soil behavior, Third edition, John Wiley and Sons, Inc., ISBN 978-0-471-46302-3
2. [^] ***a b c d e f*** Santamarina, J.C., Klein, K.A., & Fam, M.A. (2001). *Soils and Waves: Particulate Materials Behavior, Characterization and Process Monitoring*. Wiley. ISBN 978-0-471-49058-6.cite book: CS1 maint: multiple names: authors list (link).
3. [^] ***a b c d e f g h i j k l*** Powrie, W., Spon Press, 2004, *Soil Mechanics – 2nd ed* ISBN 0-415-31156-X

4. ^ **a b c d e f** A Guide to Soil Mechanics, Bolton, Malcolm, Macmillan Press, 1979. ISBN 0-333-18931-0
5. ^ "Built Environment – Routledge". *Routledge.com*. Retrieved 2017-01-14.
6. ^ **a b c d e** Lambe, T. William & Robert V. Whitman. *Soil Mechanics*. Wiley, 1991; p. 29. ISBN 978-0-471-51192-2
7. ^ **a b c d** Guerriero V., Mazzoli S. (2021). "Theory of Effective Stress in Soil and Rock and Implications for Fracturing Processes: A Review". *Geosciences*. **11** (3): 119. *Bibcode:2021Geosc..11..119G*. doi:10.3390/geosciences11030119.
8. ^ ASTM Standard Test Methods of Particle-Size Distribution (Gradation) of Soils using Sieve Analysis. <http://www.astm.org/Standards/D6913.htm> Archived 2011-08-10 at the Wayback Machine
9. ^ "Classification of Soils for Engineering Purposes: Annual Book of ASTM Standards". *D 2487-83*. **04** (8). American Society for Testing and Materials. 1985: 395–408. Archived from the original on 2010-09-14. Retrieved 2010-08-31. cite journal: Cite journal requires `|journal=` (help)
10. ^ **a b** Wood, David Muir, Soil Behavior and Critical State Soil Mechanics, Cambridge University Press, 1990, ISBN 0-521-33249-4
11. ^ **a b c d e f g** Disturbed soil properties and geotechnical design, Schofield, Andrew N., Thomas Telford, 2006. ISBN 0-7277-2982-9
12. ^ ASTM Standard Test Methods for Minimum Index Density and Unit Weight of Soils and Calculation of Relative Density. <http://www.astm.org/Standards/D4254.htm> Archived 2011-09-07 at the Wayback Machine
13. ^ Ozhovan, M.I.; Dmitriev, I.E.; Batyukhnova, O.G. (1993). "Fractal structure of pores in clay soil". *Atomic Energy*. **74** (3): 241–243. doi:10.1007/BF00739059. S2CID 95352427.
14. ^ **a b** Holtz, R.D, and Kovacs, W.D., 1981. An Introduction to Geotechnical Engineering. Prentice-Hall, Inc. page 448
15. ^ Terzaghi, K., 1943, *Theoretical Soil Mechanics*, John Wiley and Sons, New York
16. ^ **a b c d** Terzaghi, K., Peck, R.B., Mesri, G. (1996) Soil mechanics in Engineering Practice, Third Edition, John Wiley & Sons, Inc., ISBN 0-471-08658-4
17. ^ Poulos, S. J. 1989. Advance Dam Engineering for Design, Construction, and Rehabilitation: Liquefaction Related Phenomena. Ed. Jansen, R.B, Van Nostrand Reinhold, pages 292–297.
18. ^ *Slope Stability (PDF)*. *Engineer Manual*. Vol. EM 1110-2-1902. United States Army Corps of Engineers. 3 Oct 2003. Archived (PDF) from the original on 2016-12-29. Retrieved 2017-01-18.
19. ^ "Slope Stability Calculator". Retrieved 2006-12-14.
20. ^ Chugh, A.K. (2002). "A method for locating critical slip surfaces in slope stability analysis: Discussion". *Canadian Geotechnical Journal*. **39** (3): 765–770. doi:10.1139/t02-042.
21. ^ Poulos, Steve J. (1981). "The Steady State of Deformation". *Journal of Geotechnical Engineering*. **107** (GT5): 553–562.
22. ^ Joseph, Paul G. (2009). "Constitutive Model of Soil Based on a Dynamical Systems Approach". *Journal of Geotechnical and Geoenvironmental Engineering*. **135** (8): 1155–

1158. doi:10.1061/(asce)gt.1943-5606.0000001.

23. ^ Joseph, Paul G. (2010). "A Dynamical Systems Based Approach to Soil Shear". *Géotechnique*. **LX** (10): 807–812. Bibcode:2010Getq...60..807J. doi:10.1680/geot.9.p.001.
24. ^ Joseph, Paul G. (2012). "Physical Basis and Validation of a Constitutive Model for Soil Shear Derived from Micro-Structural Changes". *International Journal of Geomechanics*. **13** (4): 365–383. doi:10.1061/(asce)gm.1943-5622.0000209.
25. ^ Joseph, Paul G. (2014). "Generalised dynamical systems soil deformation model". *Geotechnical Research*. **1** (1): 32–42. Bibcode:2014GeotR...1...32J. doi:10.1680/geores.14.00004.
26. ^ Joseph, Paul G. (2017). *Dynamical Systems-Based Soil Mechanics (first ed.)*. CRC Press/Balkema. p. 138. ISBN 9781138723221. Archived from the original on 2018-03-24 . Retrieved 2017-05-14.

External links

[edit]

-  Media related to Soil mechanics at Wikimedia Commons


- v
- t
- e

Soil science

- History
- Index

Main fields

- Pedology
- Edaphology
- Soil biology
- Soil microbiology
- Soil zoology
- Soil ecology
- Soil physics
- Soil mechanics
- Soil chemistry
- Environmental soil science
- Agricultural soil science



Soil topics

- Soil
- Pedosphere
 - Soil morphology
 - Pedodiversity
 - Soil formation
- Soil erosion
- Soil contamination
- Soil retrogression and degradation
- Soil compaction
 - Soil compaction (agriculture)
- Soil sealing
- Soil salinity
 - Alkali soil
- Soil pH
 - Soil acidification
- Soil health
- Soil life
- Soil biodiversity
- Soil quality
- Soil value
- Soil fertility
- Soil resilience
- Soil color
- Soil texture
- Soil structure
 - Pore space in soil
 - Pore water pressure
- Soil crust
- Soil horizon
- Soil biomantle
- Soil carbon
- Soil gas
 - Soil respiration
- Soil organic matter
- Soil moisture
 - Soil water (retention)

- **v**
- **t**
- **e**

Soil classification

World Reference Base for Soil Resources (1998–)

- Acrisols
- Alisols
- Andosols
- Anthrosols
- Arenosols
- Calcisols
- Cambisols
- Chernozem
- Cryosols
- Durisols
- Ferralsols
- Fluvisols
- Gleysols
- Gypsisols
- Histosol
- Kastanozems
- Leptosols
- Lixisols
- Luvisols
- Nitisols
- Phaeozems
- Planosols
- Plinthosols
- Podzols
- Regosols
- Retisols
- Solonchaks
- Solonetz
- Stagnosol
- Technosols
- Umbrisols
- Vertisols

USDA soil

- Alfisols
- Andisols
- Aridisols
- Entisols
- Gelisols
- Histosols

Applications

- Soil conservation
- Soil management
- Soil guideline value
- Soil survey
- Soil test
- Soil governance
- Soil value
- Soil salinity control
- Erosion control
- Agroecology
- Liming (soil)

Related fields

- Geology
- Geochemistry
- Petrology
- Geomorphology
- Geotechnical engineering
- Hydrology
- Hydrogeology
- Biogeography
- Earth materials
- Archaeology
- Agricultural science
 - Agrology

Societies, Initiatives


- Australian Society of Soil Science Incorporated
- Canadian Society of Soil Science
- Central Soil Salinity Research Institute (India)
- German Soil Science Society
- Indian Institute of Soil Science
- International Union of Soil Sciences
- International Year of Soil
- National Society of Consulting Soil Scientists (US)
- OPAL Soil Centre (UK)
- Soil Science Society of Poland
- Soil and Water Conservation Society (US)
- Soil Science Society of America
- World Congress of Soil Science

Scientific journals

- *Acta Agriculturae Scandinavica B*
- *Journal of Soil and Water Conservation*
- *Plant and Soil*
- *Pochvovedenie*
- *Soil Research*
- *Soil Science Society of America Journal*

See also

- Land use
- Land conversion
- Land management
- Vegetation
- Infiltration (hydrology)
- Groundwater
- Crust (geology)
- Impervious surface/Surface runoff
- Petrichor

-  [Wikipedia:WikiProject Soil](#)
-  [Category soil](#)
- [Category soil science](#)
-  [List of soil scientists](#)





















- v
- t
- e

Geotechnical engineering

Offshore geotechnical engineering

**Investigation
and
instrumentation**

Field (*in situ*)

-  Core drill
-  Cone penetration test
-  Geo-electrical sounding
-  Permeability test
-  Load test
 - Static
 - Dynamic
 - Statnamic
-  Pore pressure measurement
 - Piezometer
 - Well
-  Ram sounding
-  Rock control drilling
-  Rotary-pressure sounding
-  Rotary weight sounding
-  Sample series
-  Screw plate test
- Deformation monitoring
 -  Inclinometer
 -  Settlement recordings
-  Shear vane test
-  Simple sounding
-  Standard penetration test
-  Total sounding
-  Trial pit
-  Visible bedrock
- Nuclear densometer test
- Exploration geophysics
- Crosshole sonic logging

Soil

Types

- Clay
- Silt
- Sand
- Gravel
- Peat
- Loam
- Loess

Properties

- Hydraulic conductivity
- Water content
- Void ratio
- Bulk density
- Thixotropy
- Reynolds' dilatancy
- Angle of repose
- Friction angle
- Cohesion
- Porosity
- Permeability
- Specific storage
- Shear strength
- Sensitivity

**Structures
(Interaction)**

Natural features

- Topography
- Vegetation
- Terrain
- Topsoil
- Water table
- Bedrock
- Subgrade
- Subsoil

Earthworks

- Shoring structures
 - Retaining walls
 - Gabion
 - Ground freezing
 - Mechanically stabilized earth
 - Pressure grouting
 - Slurry wall
 - Soil nailing
 - Tieback
- Land development
- Landfill
- Excavation
- Trench
- Embankment
- Cut
- Causeway
- Terracing
- Cut-and-cover
- Cut and fill
- Fill dirt
- Grading
- Land reclamation
- Track bed
- Erosion control
- Earth structure
- Expanded clay aggregate
- Crushed stone
- Geosynthetics
 - Geotextile
 - Geomembrane
 - Geosynthetic clay liner
 - Cellular confinement
- Infiltration

Foundations

- Shallow
- Deep

Forces

- Effective stress
- Pore water pressure
- Lateral earth pressure
- Overburden pressure
- Preconsolidation pressure

Mechanics

Phenomena/ problems

- Permafrost
- Frost heaving
- Consolidation
- Compaction
- Earthquake
 - Response spectrum
 - Seismic hazard
 - Shear wave
- Landslide analysis
 - Stability analysis
 - Mitigation
 - Classification
 - Sliding criterion
 - Slab stabilisation
- Bearing capacity * Stress distribution in soil

Numerical analysis software

- SEEP2D
- STABL
- SVFlux
- SVSlope
- UTEXAS
- Plaxis

Related fields

- Geology
- Geochemistry
- Petrology
- Earthquake engineering
- Geomorphology
- Soil science
- Hydrology
- Hydrogeology
- Biogeography
- Earth materials
- Archaeology
- Agricultural science
 - Agrology

Authority control databases: National  [Edit this at Wikidata](#)


- Germany
- United States
- France
- Japan
- Czech Republic
- Israel

About home repair


For the novel by Liz Rosenberg, see Home Repair (novel).

For other uses of "repair", see Maintenance.


This article **needs additional citations for verification**. Please help improve this article by adding citations to reliable sources. Unsourced material may be challenged and removed.



Find sources: "Home repair" – news · newspapers · books · scholar · JSTOR (January 2017) *(Learn how and when to remove this message)*

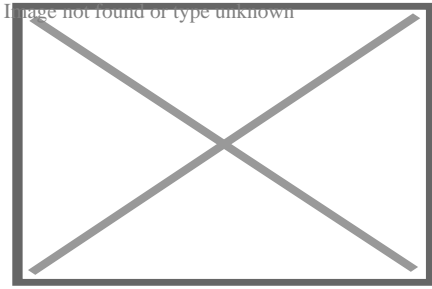

A mobile home being repaired in Oklahoma

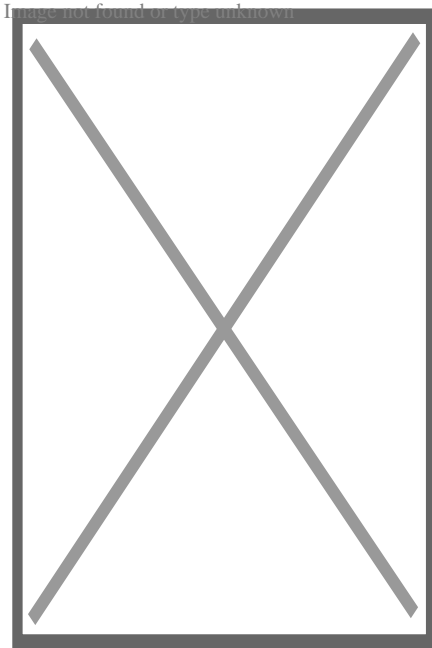

A person making these repairs to a house after a flood

Home repair involves the diagnosis and resolution of problems in a home, and is related to home maintenance to avoid such problems. Many types of repairs are "do it yourself" (DIY) projects, while others may be so complicated, time-consuming or risky as to require the assistance of a qualified handyperson, property manager, contractor/builder, or other professionals.

Home repair is not the same as renovation, although many improvements can result from repairs or maintenance. Often the costs of larger repairs will justify the alternative of investment in full-scale improvements. It may make just as much sense to upgrade a home system (with an improved one) as to repair it or incur ever-more-frequent and expensive maintenance for an inefficient, obsolete or dying system.

Worn, consumed, dull, dirty, clogged

[edit]

Repairs often mean simple replacement of worn or used components intended to be periodically renewed by a home-owner, such as burnt out light bulbs, worn out batteries, or overfilled vacuum cleaner bags. Another class of home repairs relates to restoring something to a useful condition, such as sharpening tools or utensils, replacing leaky faucet washers, cleaning out plumbing traps, rain gutters. Because of the required precision, specialized tools, or hazards, some of these are best left to experts such as a plumber. One emergency repair that may be necessary in this area is overflowing toilets. Most of them have a shut-off valve on a pipe beneath or behind them so that the water supply can be turned off while repairs are made, either by removing a clog or repairing a broken mechanism.

Broken or damaged

[edit]

Perhaps the most perplexing repairs facing a home-owner are broken or damaged things. In today's era of built-in obsolescence for many products, it is often more convenient to replace something rather than attempt to repair it. A repair person is faced with the tasks of accurately identifying the problem, then finding the materials, supplies, tools and skills necessary to sufficiently effect the repair. Some things, such as broken windows, appliances or furniture can be carried to a repair shop, but there are many repairs that can be performed easily enough, such as patching holes in plaster and drywall, cleaning stains, repairing cracked windows and their screens, or replacing a broken electrical switch or outlet. Other repairs may have some urgency, such as broken water pipes, broken doors, latches or windows, or a leaky roof or water tank, and this factor can certainly justify calling for professional help. A home handyperson may become adept at dealing with such immediate repairs, to avoid further damage or loss, until a professional can be summoned.

Emergency repairs

[edit]

Emergencies can happen at any time, so it is important to know how to quickly and efficiently fix the problem. From natural disasters, power loss, appliance failure and no water, emergency repairs tend to be one of the most important repairs to be comfortable and confident with. In most cases, the repairs are DIY or fixable with whatever is around the house. Common repairs would be fixing a leak, broken window, flooding, frozen pipes or clogged toilet. Each problem can have a relatively simple fix, a leaky roof and broken window can be patched, a flood can be pumped out, pipes can be thawed and repaired and toilets can be unclogged with a chemical. For the most part, emergency repairs are not permanent. They are what you can do fast to stop the problem then have a professional come in to permanently fix it.^[1] Flooding as a result of frozen pipes, clogged toilets or a leaky roof can result in very costly water damage repairs and even potential health issues resulting from mold growth if not addressed in a timely manner.

Maintenance

[edit]

Periodic maintenance also falls under the general class of home repairs. These are inspections, adjustments, cleaning, or replacements that should be done regularly to ensure proper functioning of all the systems in a house, and to avoid costly emergencies. Examples include annual testing and adjustment of alarm systems, central heating or cooling systems (electrodes, thermocouples, and fuel filters), replacement of water treatment components or air-handling filters, purging of heating radiators and water tanks, defrosting a freezer, vacuum refrigerator coils, refilling dry floor-drain traps with water, cleaning out rain gutters, down spouts and drains, touching up worn house paint and weather seals, and cleaning accumulated creosote out of chimney flues, which may be best left to a chimney sweep.

Examples of less frequent home maintenance that should be regularly forecast and budgeted include repainting or staining outdoor wood or metal, repainting masonry, waterproofing masonry, cleaning out septic systems, replacing sacrificial electrodes in water heaters, replacing old washing machine hoses (preferably with stainless steel hoses less likely to burst and cause a flood), and other home improvements such as replacement of obsolete or ageing systems with limited useful lifetimes (water heaters, wood stoves, pumps, and asphaltic or wooden roof shingles and siding).

Often on the bottom of people's to-do list is home maintenance chores, such as landscaping, window and gutter cleaning, power washing the siding and hard-scape, etc. However, these maintenance chores pay for themselves over time. Often, injury could occur when operating heavy machinery or when climbing on ladders or roofs around your home, so if an individual is not in the proper physical condition to accomplish these chores, then they should consult a professional. Lack of maintenance will cost more due to higher costs associated with repairs or replacements to be made later. It requires discipline and learning aptitude to repair and maintain the home in good condition, but it is a satisfying experience to perform even seemingly minor repairs.

Good operations

[edit]

Another related issue for avoiding costly repairs (or disasters) is the proper operation of a home, including systems and appliances, in a way that prevents damage or prolongs their usefulness. For example, at higher latitudes, even a clean rain gutter can suddenly build up an ice dam in winter, forcing melt water into unprotected roofing, resulting in leaks or even flooding inside walls or rooms. This can be prevented by installing moisture barrier beneath the roofing tiles. A wary home-owner should be alert to the conditions that can result in larger problems and take remedial action before damage or injury occurs. It may be easier to tack

down a bit of worn carpet than repair a large patch damaged by prolonged misuse. Another example is to seek out the source of unusual noises or smells when mechanical, electrical or plumbing systems are operating—sometimes they indicate incipient problems. One should avoid overloading or otherwise misusing systems, and a recurring overload may indicate time for an upgrade.

Water infiltration is one of the most insidious sources of home damage. Small leaks can lead to water stains, and rotting wood. Soft, rotten wood is an inviting target for termites and other wood-damaging insects. Left unattended, a small leak can lead to significant structural damage, necessitating the replacement of beams and framing.

With a useful selection of tools, typical materials and supplies on hand, and some home repair information or experience, a home-owner or handyperson should be able to carry out a large number of DIY home repairs and identify those that will need the specialized attention of others.

Remediation of environmental problems

[edit]

When a home is sold, inspections are performed that may reveal environmental hazards such as radon gas in the basement or water supply or friable asbestos materials (both of which can cause lung cancer), peeling or disturbed lead paint (a risk to children and pregnant women), in-ground heating oil tanks that may contaminate ground water, or mold that can cause problems for those with asthma or allergies. Typically the buyer or mortgage lender will require these conditions to be repaired before allowing the purchase to close. An entire industry of environmental remediation contractors has developed to help home owners resolve these types of problems.

See also

[edit]

-  not found or type unknown Housing portal
- Electrical wiring
- Handyperson
- Housekeeping
- Home improvement
- Home wiring
- HVAC
- Maintenance, repair, and operations
- Plumbing
- Right to repair

- Smoke alarm
- Winterization

References

[edit]

1. ^ *Reader's Digest New Complete Do-it-yourself Manual*. Montreal, Canada: Reader's Digest Association. 1991. pp. 9–13. ISBN 9780888501783. OCLC 1008853527.

- v
- t
- e

Rooms and spaces of a house

- Bonus room
- Common room
- Den
- Dining room
- Family room
- Garret
- Great room
- Home cinema
- Kitchen
 - dirty kitchen
 - kitchenette
- Shared rooms**
- Living room
- Gynaecium
 - harem
- Andron
 - man cave
- Recreation room
 - billiard room
- Shrine
- Study
- Sunroom

Private rooms

- Bathroom
 - toilet
- Bedroom / Guest room
 - closet
- Bedsit / Miniflat
- Boudoir
- Cabinet
- Nursery

Spaces

- Atrium
- Balcony
- Breezeway
- Conversation pit
- Cubby-hole
- Deck
- Elevator
 - dumbwaiter
- Entryway/Genkan
- Fireplace
 - hearth
- Foyer
- Hall
- Hallway
- Inglenook
- Lanai
- Loft
- Loggia
- Overhang
- Patio
- Porch
 - screened
 - sleeping
- Ramp
- Secret passage
- Stairs/Staircase
- Terrace
- Veranda
- Vestibule

**Technical, utility
and storage**

- Attic
- Basement
- Carport
- Cloakroom
- Closet
- Crawl space
- Electrical room
- Equipment room
- Furnace room / Boiler room
- Garage
- Janitorial closet
- Larder
- Laundry room / Utility room / Storage room
- Mechanical room / floor
- Pantry
- Root cellar
- Semi-basement
- Storm cellar / Safe room
- Studio
- Wardrobe
- Wine cellar
- Wiring closet
- Workshop

Great house areas

- Antechamber
- Ballroom
- Kitchen-related
 - butler's pantry
 - buttery
 - saucery
 - scullery
 - spicery
 - still room
- Conservatory / Orangery
- Courtyard
- Drawing room
- Great chamber
- Great hall
- Library
- Long gallery
- Lumber room
- Parlour
- Sauna
- Servants' hall
- Servants' quarters
- Smoking room
- Solar
- State room
- Swimming pool
- Turret
- Undercroft

Other

- Furniture
- Hidden room
- House
 - house plan
 - styles
 - types
- Multi-family residential
- Secondary suite
- Duplex
- Terraced
- Detached
- Semi-detached
- Townhouse
- Studio apartment

**Architectural
elements**

- Arch
- Balconet
- Baluster
- Belt course
- Bressummer
- Ceiling
- Chimney
- Colonnade / Portico
- Column
- Cornice / Eaves
- Dome
- Door
- Ell
- Floor
- Foundation
- Gable
- Gate
 - Portal
- Lighting
- Ornament
- Plumbing
- Quoins
- Roof
 - shingles
- Roof lantern
- Sill plate
- Style
 - list
- Skylight
- Threshold
- Transom
- Vault
- Wall
- Window

Related

- Backyard
- Driveway
- Front yard
- Garden
 - roof garden
- Home
- Home improvement
- Home repair
- Shed
- Tree house

-  Category: Rooms

About Cook County

Photo

Image not found or type unknown

Photo

Image not found or type unknown

Photo

Image not found or type unknown

Photo

Image not found or type unknown

Things To Do in Cook County

Photo

Sand Ridge Nature Center

4.8 (96)

Photo

Image not found or type unknown

River Trail Nature Center

4.6 (235)

Photo

Image not found or type unknown

Palmisano (Henry) Park

4.7 (1262)

Driving Directions in Cook County

Driving Directions From Palmisano (Henry) Park to

Driving Directions From Lake Katherine Nature Center and Botanic Gardens to


Driving Directions From Navy Pier to

<https://www.google.com/maps/dir/Navy+Pier/United+Structural+Systems+of+Illinois%2C+87.6050944,14z/data=!3m1!4b1!4m14!4m13!1m5!1m1!1sunknown!2m2!1d-87.6050944!2d41.8918633!1m5!1m1!1sChIJ-wSxDtinD4gRiv4kY3RRh9U!2m2!1d-88.1396465!2d42.0637725!3e0>

<https://www.google.com/maps/dir/Lake+Katherine+Nature+Center+and+Botanic+Gardens/87.8010774,14z/data=!3m1!4b1!4m14!4m13!1m5!1m1!1sunknown!2m2!1d-87.8010774!2d41.6776048!1m5!1m1!1sChIJ-wSxDtinD4gRiv4kY3RRh9U!2m2!1d-88.1396465!2d42.0637725!3e2>

<https://www.google.com/maps/dir/Palmisano+%28Henry%29+Park/United+Structural+Systems+of+Illinois%2C+87.6490151,14z/data=!3m1!4b1!4m14!4m13!1m5!1m1!1sunknown!2m2!1d-87.6490151!2d41.8429903!1m5!1m1!1sChIJ-wSxDtinD4gRiv4kY3RRh9U!2m2!1d-88.1396465!2d42.0637725!3e1>


Reviews for



Jeffery James

(5)

Very happy with my experience. They were prompt and followed through, and very helpful in fixing the crack in my foundation.




Sarah McNeily

(5)

USS was excellent. They are honest, straightforward, trustworthy, and conscientious. They thoughtfully removed the flowers and flower bulbs to dig where they needed in the yard, replanted said flowers and spread the extra dirt to fill in an area of the yard. We've had other services from different companies and our yard was really a mess after. They


kept the job site meticulously clean. The crew was on time and friendly. I'd recommend them any day! Thanks to Jessie and crew.



Jim de Leon

(5)


It was a pleasure to work with Rick and his crew. From the beginning, Rick listened to my concerns and what I wished to accomplish. Out of the 6 contractors that quoted the project, Rick seemed the MOST willing to accommodate my wishes. His pricing was definitely more than fair as well. I had 10 push piers installed to stabilize and lift an addition of my house. The project commenced at the date that Rick had disclosed initially and it was completed within the same time period expected (based on Rick's original assessment). The crew was well informed, courteous, and hard working. They were not loud (even while equipment was being utilized) and were well spoken. My neighbors were very impressed on how polite they were when they entered / exited my property (saying hello or good morning each day when they crossed paths). You can tell they care about the customer concerns. They ensured that the property would be put back as clean as possible by placing MANY sheets of plywood down prior to excavating. They compacted the dirt back in the holes extremely well to avoid large stock piles of soils. All the while, the main office was calling me to discuss updates and expectations of completion. They provided waivers of lien, certificates of insurance, properly acquired permits, and JULIE locates. From a construction background, I can tell you that I did not see any flaws in the way they operated and this an extremely professional company. The pictures attached show the push piers added to the foundation (pictures 1, 2 & 3), the amount of excavation (picture 4), and the restoration after dirt was placed back in the pits and compacted (pictures 5, 6 & 7). Please notice that they also sealed two large cracks and steel plated these cracks from expanding further (which you can see under my sliding glass door). I, as well as my wife, are extremely happy that we chose United Structural Systems for our contractor. I would happily tell any of my friends and family to use this contractor should the opportunity arise!



Chris Abplanalp

(5)

USS did an amazing job on my underpinning on my house, they were also very courteous to the proximity of my property line next to my neighbor. They kept things in order with all the dirt/mud they had to excavate. They were done exactly in the timeframe they indicated, and the contract was very details oriented with drawings of what would be done. Only thing that would have been nice, is they left my concrete a little muddy with boot prints but again, all-in-all a great job



Dave Kari

(5)

What a fantastic experience! Owner Rick Thomas is a trustworthy professional. Nick and the crew are hard working, knowledgeable and experienced. I interviewed every company in the area, big and small. A homeowner never wants to hear that they have foundation issues. Out of every company, I trusted USS the most, and it paid off in the end. Highly recommend.

Examining Sandy Loam for Residential Support [View GBP](#)

Check our other pages :

- [Incorporating Root Barriers to Prevent Shifts](#)
- [Examining Seasonal Swelling and Shrinking of Soil](#)
- [Understanding Swale Placement for Controlled Water Flow](#)
- [Installing Exterior Waterproof Barriers for Walls](#)
- [Extending Gutter Downspouts for Extra Protection](#)

United Structural Systems of Illinois, Inc

Phone : +18473822882

City : Hoffman Estates

State : IL

Zip : 60169

Address : 2124 Stonington Ave

[Google Business Profile](#)

Company Website : <https://www.unitedstructuralsystems.com/>

USEFUL LINKS

[Residential Foundation Repair Services](#)

[home foundation repair service](#)

[Foundation Repair Service](#)

[Sitemap](#)

[Privacy Policy](#)

[About Us](#)

