



### TIPPING BUCKET RAIN GAUGE RG200 / RG200-H

- High-precision, highly reliable tipping bucket rain gauge
- Robust aluminium enclosure for durability in all environments
- Advanced metal 3D-printed siphon ensures exceptional accuracy across a wide range of rainfall intensities

#### **Applications**

- Meteorological and climatological rainfall measurement
- Roadside and highway weather stations
- Hydrological monitoring and flood early warning systems
- Agrometeorological research and applications


#### **Product Description**

The Geolux RG200 is a precision-engineered tipping bucket rain gauge, designed for long-term reliability and accuracy in demanding environments.

A specially developed siphon regulates water flow to the tipping mechanism, ensuring consistent performance across both low and high rainfall intensities. Unlike conventional designs, the RG200's siphon is manufactured as a single-piece metal component using advanced 3D printing technology, using optimized internal hydraulic chambers that deliver unmatched measurement precision.

For operation in cold climates and snowy conditions, the rain gauge can be equipped with optional heaters ranging from 18 W to 100 W. An integrated power management system with a voltage upconverter supports a wide supply voltage range of 9 to 27 V.

The tipping mechanism is equipped with a dual reed switch output. This allows easy integration with dual dataloggers or pulse-counting systems. Collected water is drained through dual orifices at the base of the instrument.

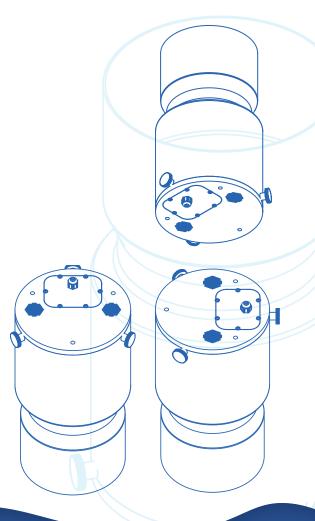

# RG200

## **Detailed Specifications**

Model Name	RG200 / RG200-H
<b>Collection Area</b>	200 cm <sup>2</sup>
Resolution (rainfall per tip)	0.2 mm
Measurement Range	0 – 700 mm/h
Siphon	Yes, single-piece aluminium
Leveling unit	Air-bubble indicator
<b>Enclosure Material</b>	Anodized aluminium
Output interface	2x Reed-switch pulse
Connector	M12 circular 12-pin
Heater*	18W 25W 50W 75W 100W
Heater Input Voltage*	9 – 27 VDC
Operating Temperature Range	-40 °C to +85 °C
Operating Humidity Range	0 - 99 % RH
<b>Enclosure Dimensions</b>	Ф180 mm x H 339 mm

<sup>\*</sup> The heaters are only available on the RG200-H models

FCC & CE **APPROVED**MADE IN **EU** 

