

Contract Range Plasterboard Door Access Panel


Feb 2022

Product



INSTALLATION

- Prepare a clear trimmed and protected opening in the structure 5mm larger than the ordered panel
- Create cut outs for the pivot hinges approx. 10x6mm so the pivot operation is clear
- Screw fix using suitable screws through the pre punched holes to all four sides of the frame
- Fix through face of frame and scrim tape as per plaster stop bead
- To maintain even gaps between door and frame complete the operation with door in frame where possible
- To remove the door from frame remove the pivot hinge plate with a 10mm spanner
- When refitting and after installation ensure the pivot hinge plates are fully located and flat to the inside edge of the door tray and that if fitted the retaining chains are in place.

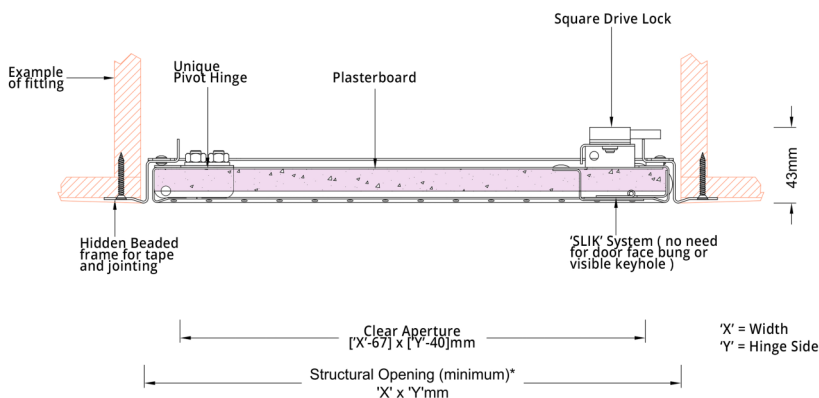

FEATURES & BENEFITS

- Plasterboard faced access door
- Lightweight low profile
- Unique pivot hinge
- Beaded plaster edge to frame and door tray
- Push catch or square drive operated lock with invisible keyhole system
- Suitable for walls and ceilings
- Finished in powder coated white and can be painted to suit surrounding wall surface
- 12.5mm plasterboard

Product Details

Standard Sizes (mm)	
Size	200x200; 300x300; 450x450; 550x550; 600x300; 600x600; 900x600; 1200x550; 1200x600 Note—Hinge side always stated first
Colour	White (Ra19010) powder coated 20% gloss finish
Material	1.0 & 1.2mm Zintec electro-galvanized mild steel
CODE Beaded	AC19PBAC

Hinge and lock mechanism

Removable pivot plate hinge system. Square drive operated lock riveted to the return fold of the door tray with keyhole concealed by the invisible keyhole system. Euro cylinder, radial pin tumbler and three point lock options also available.

Fire Rating

Sizes up to 600x600 for walls are available up to 1 hour or 2 hour fire rating. Testing undertaken independently by BM Trada.

