

Technical Data Sheet


Fresh TL98E Wall Vent

PRODUCT



FEATURES & BENEFITS

- Economy wall vent for quick and simple ventilation
- Supplied with standard dust and insect filter
- Front cover mounted on internal grille and includes condensation shield
- Airflow and direction are adjusted with the front cap
- Easy to clean and install
- Telescopic pipe for flexibility
- Wide range of storm and Allergy filter accessories available

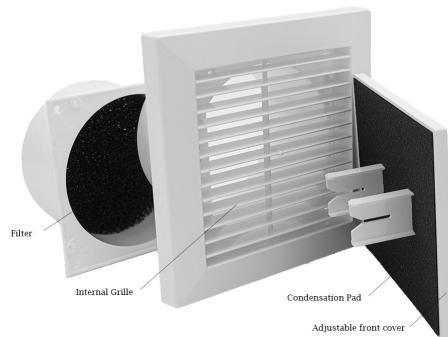


PRODUCT DETAILS

Free Area	6400mm ² (3600 equivalent)
Wall opening	TL98E - 102mm diameter
Maximum thickness	TL98E - 350mm
Size	External grille - 150 x 150mm Internal grille - 150x150x39mm

INSTALLATION

- Place vent as high as possible at least 10cm below ceiling, preferably above radiator
- Check for services before drilling
- Use core drill with minimum dim Ø102mm
- Drill hole so pipe slopes slightly downwards
- If wall thickness is less than 300mm pipe can be cut to required length, if over additional pipes may be required
- Seal pipe both inside and outside with a suitable sealant agent
- Mechanically fix external grille into place
- Remove internal vent housing and fix with 4 screws
- Attached front cover and check vent is fully operational
- Wash filter 1-2 times per year.

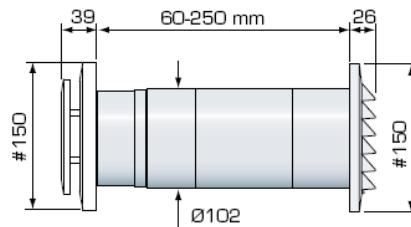

Colour	White RAL9010
Code	TL98E

