ICON GEO-RIDGE


Technical Data Sheet


June 2024

PRODUCT




Components supplied in the pack







10 Galvanised batten brackets; 13 clamping plates; 13 EPDM washers; 13 screws

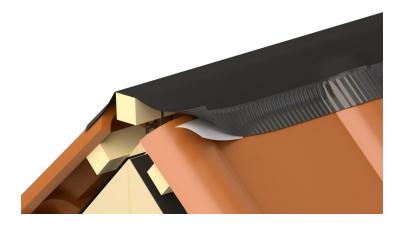

USES

- Dry fix ventilation ridge and hip roll systems for slate, concrete or clay roof coverings
- Universal solution to suit round and angled ridge tiles
- Suitable for new and retro-fit projects on roof

FEATURES & BENEFITS

- Provides 5000mm²/m ventilation between ridge tiles on any flat or pan tile and slates
- Protects roof ridge tiles against wind uplift, water ingress and general deterioration over time
- Convenient 6m one box solution contains all components needed to install the system.
- Quick and easy to install, in most weather conditions with no special tools required
- Mechanically secure roof ridge tiles to help meet BS5534 & ICP2 code of practice for slating and tiling.
- Strong, malleable and corrosion resistant aluminium flashing.
- 70mm wide ridge union provides additional water bar protection
- Stainless steel clamping plates
- Available in Black, Terracotta or Brown

PRODUCT DETAILS

Ventilation Area	5000mm²/m
Size	Roll size 6m x 300mm
Material	Geotextile roll with aluminium edge.
Colour	Black, Brown & Terracotta
Code	BLACK - RIDGEGEO001 TERRACOTTA - RIDGEGEO002 BROWN - RIDGEGEO003

