

Technical Data Sheet Dry Ridge/Hip roll fixing system

PRODUCT

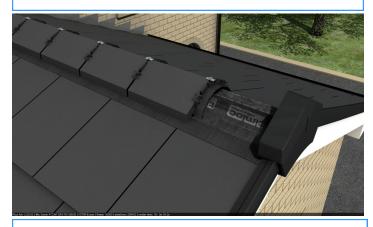


Components supplied in the pack



l no x 6m ridge vent roll

13 no Ridge unions



10 Galvanised batten brackets; 26 ridge union clips; 13 clamping plates; 13 EPDM washers; 13 screws

HIPS





6 no x 1.2mtr pack

For hip systems it is recommended to use an additional hip tray with the ridge pack to provide complete protection from rainwater ingress along the vulnerable hip area.

USES

- Dry fix ventilation ridge and hip roll systems for slate, concrete or clay roof coverings
- Universal solution to suit round and angled ridge tiles
- Suitable for new and retro-fit projects on roof pitches form 15-55°

FEATURES & BENEFITS

- Provides 5000mm²/m ventilation between ridge tiles on any flat or pan tile and slates
- Protects roof ridge tiles against wind uplift, water ingress and general deterioration over time
- Convenient 6m one box solution contains all components needed to install the system.
- Quick and easy to install, in most weather conditions with no special tools required
- Mechanically secure roof ridge tiles to help meet BS5534 & ICP2 code of practice for slating and tiling.
- Strong, malleable and corrosion resistant aluminium flashing, secured to water resistant breathable roll membrane
- 70mm wide ridge union provides additional water bar protection
- Stainless steel clamping plates
- Available in Black, Terracotta or Brown

Product Details

Ventilation Area	5000mm²/m
Size	Roll size 6m x 300mm
Material	Aluminium flashing with air permeable roll membrane.
Colour	Black, Brown & Terracotta
Code	Black IRS44600 Terracotta IRS44601 Brown IRS44602
Hip	6mx1.2 pack IRS44623

