


# ICON GEO-RIDGE


## Technical Data Sheet

June 2024


### PRODUCT

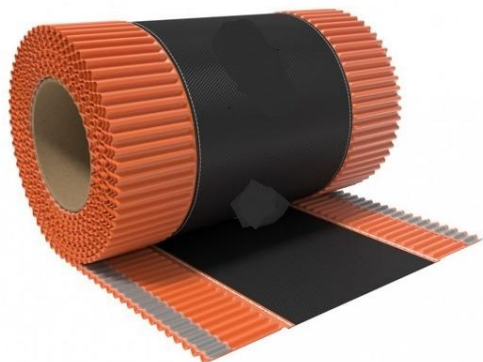


### Components supplied in the pack




1 no x 6m ridge vent roll

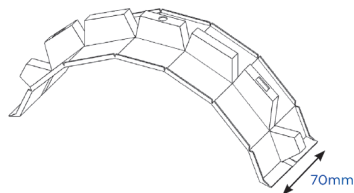

13 no Ridge unions



10 Galvanised batten brackets; 13 clamping plates; 13 EPDM washers; 13 screws

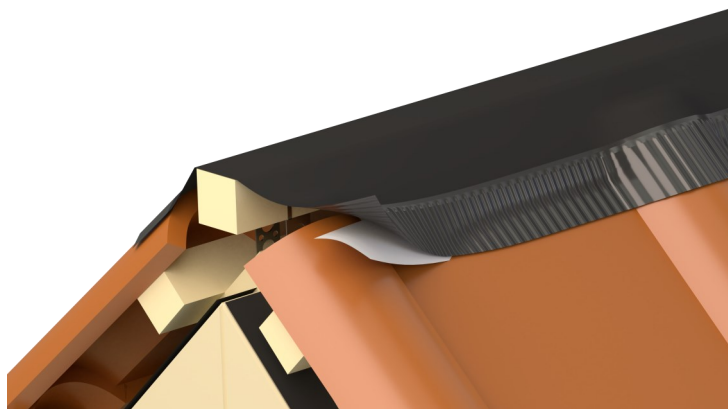

### USES

- Dry fix ventilation ridge and hip roll systems for slate, concrete or clay roof coverings
- Universal solution to suit round and angled ridge tiles
- Suitable for new and retro-fit projects on roof

### FEATURES & BENEFITS

- Provides 5000mm<sup>2</sup>/m ventilation between ridge tiles on any flat or pan tile and slates
- Protects roof ridge tiles against wind uplift, water ingress and general deterioration over time
- Convenient 6m one box solution contains all components needed to install the system.
- Quick and easy to install, in most weather conditions with no special tools required
- Mechanically secure roof ridge tiles to help meet BS5534 & ICP2 code of practice for slating and tiling.
- Strong, malleable and corrosion resistant aluminium flashing.
- 70mm wide ridge union provides additional water bar protection
- Stainless steel clamping plates
- Available in Black, Terracotta or Brown

### PRODUCT DETAILS

<b>Ventilation Area</b>	5000mm <sup>2</sup> /m
<b>Size</b>	Roll size 6m x 300mm
<b>Material</b>	Geotextile roll with aluminium edge.
<b>Colour</b>	Black, Brown & Terracotta
<b>Code</b>	BLACK - RIDGEGEO001 TERRACOTTA - RIDGEGEO002 BROWN - RIDGEGEO003

