


# Brick Cavity Trays

## Stepped leaded cavity tray system for multi cavity options in brick wall construction of 75mm course heights


### Application

- At abutment of a pitched roof with a cavity wall
- On external walls not exceeding 120mm thickness, built from standard brickwork or similar sized components with regular course heights including mortar of approx 75mm
- On roof pitches of 25 degrees and above
- Cavity widths of between 50mm-110mm

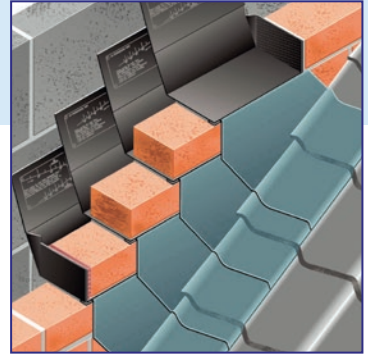


### Features and Benefits


- Supplied with factory fitted lead flashing ready cut to suit the pitch of the roof and type of roof covering
- 195mm high back upstand
- Adjustable upstand to cover 50mm – 110mm cavities
- Roof pitch marks on tray upstand to give installation guidance
- Optional longer trays for roof pitches less than 25 degrees
- Fitted with Code 4 milled lead as standard




Intermediate tray  
short lead (LH)




Intermediate tray  
long lead (LH)



Stopend starter tray  
short lead (LH)



Corner starter tray  
long lead (LH)



Ridge tray

### Product Codes for 75mm BRICK coursing

Description	Length	Handing	Product Codes
Intermediate Tray	225mm	Right Hand	20001
Intermediate Tray	225mm	Left Hand	20002
Catchment Starter Tray	225mm	RH/LH	20031/32
Corner Starter Tray	225mm	RH/LH	20041/42
Ridge Tray	420mm	N/A	20061

**NB** – Intermediate trays are 225mm in length at roof pitches of 25 degrees and above. Below this the length increases to 420mm and 525mm. For calculating quantities of stepped cavity trays required, please contact icon building products technical department.