
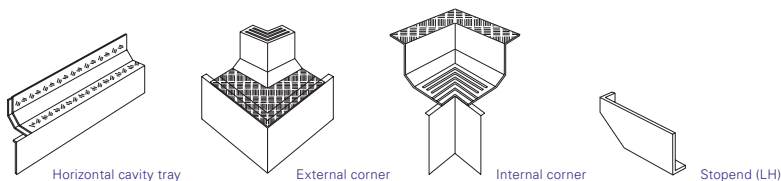


# System 2000 Horizontal Cavity Trays

## Horizontal Leaded cavity tray system for all types of brick, block and stone construction

### Application

- At abutment of a flat roof with a cavity wall
- At the abutment of a lean-to or mono pitch roof with a cavity wall
- Over airbricks, cavity liners, ducts, meter boxes etc
- On external walls, not exceeding 102.5mm in thickness built from standard brickwork, blockwork or stone
- Cavity widths of between 50mm-125mm

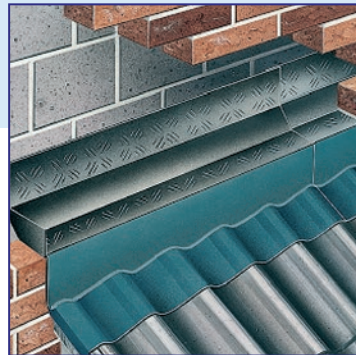

### Features and Benefits

- Supplied with factory fitted lead flashing, cut ready for dressing
- 150mm high back upstand exceeds minimum requirements
- Low profile lapped joints between sections allows any length or brick, block or stone to be used
- Angled section between cavity tray base and rear upstand automatically sheds water to the outer leaf
- Choice of two lengths; 880mm for general use & 460mm to reduce waste when making up a run of cavity trays to required lengths.
- Available with or without lead attached
- Fitted with Code 4 milled lead as standard
- Corner units and stop ends available
- Sections join together by means of a lapped joint, sealed with factory applied butyl tape

#### Product Codes for Inter-loc system horizontal tray with 150mm drop lead

Description	Overall Length	Installed length	Product Code
Horizontal tray	880mm	830mm	2075/880L (50)
Horizontal tray	460mm	410mm	2075/460L (50)
External 90° corner	N/A	N/A	2010L (50)
Internal 90° corner	N/A	N/A	2011L (50)
Stopend RH	N/A	N/A	2003
Stopend LH	N/A	N/A	2004

### Technical

Weep holes must be provided every 900mm along cavity tray run to comply with Building Regs. For calculating quantities of horizontal cavity trays required, please contact icon building products technical department.