


Technical Data Sheet

Single Airbrick



April 2020

PRODUCT

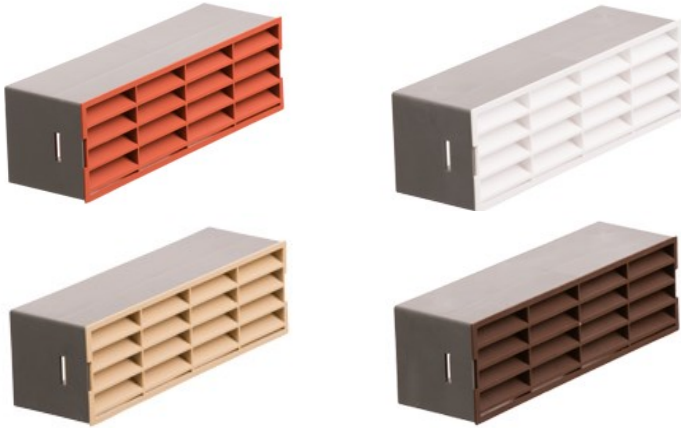

PRODUCT DETAILS

Colour	Buff, Terracotta, Grey, Black, Brown, White
Code	ICV5631T/505T –Terracotta ICV5631BE/505BE –Beige ICV5631BR/505BR –Brown ICV5631WH/505WH –White
Equivalent Area	7680mm ² per 9x3 brick vent unit
Size	210mm long x 65mm high x 63mm wide
Material	Injection moulded polypropylene

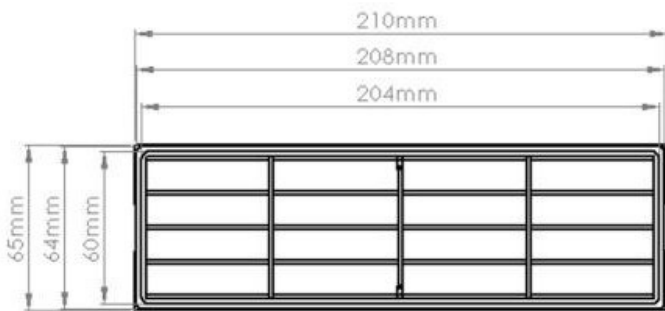

USES

- In conjunction with the ducting system 204x60mm
- To provide ventilation through external walls to the building interior.
- Used in conjunction with straight through cavity wall sleeve.

FEATURES & BENEFITS

- Equivalent area of 7680mm² per 9x3 air brick
- Unique stepped front grille reduces the entry of wind driven rain
- Available in wide range of colours to match various brick types, buff, terracotta, brown and white, in box quantities of 20
- Female adaptor for connection to outside of system 204 ducting.
- Very tough and robust high impact polypropylene
- Durable and totally resistant to decay

Max/min operating temperature - +60°C to -15°C

Individual Weight - 115g

INSTALLATION

- Always use in conjunction with ICON system 204 ducting (204x60mm)
- Remove 9x3 standard brick and replace with airbrick.

