



## INDEX

|   |       |
|---|-------|
| Single Axle Trailer .....                 | 1-2   |
| Double Axle Trailer .....                 | 3-4   |
| Tandem Axle Trailer .....                 | 5-6   |
| Three Axle - Tridem Axle Trailer .....    | 7-8   |
| Cargo Trailer .....                       | 9-10  |
| Fertilizer Trailer .....                  | 11-12 |
| Bale Trailer .....                        | 13-14 |
| Cotton - Slage Trailer .....              | 15-16 |
| Animal Transport - Forestry Trailer ..... | 17-18 |
| Slurry Tank .....                         | 19-20 |
| Water-Fire-Fuel Tank .....                | 21-22 |
| Other Equipments .....                    | 23-24 |

Palazoğlu is the biggest farm trailer manufacturer in Turkey since 1954. Over than half century experience brought us international success. We reach thousands via our 150+ domestic dealers and foreign partners in 60+ country. We serve that big dealer network with our more than 3.500 pcs production capacity per year.

The company uses modern technologies for steel processing, surface treatment and assembly. The company also has its own design and development department, through which all the products offered have gone through. Using powder coating on products to make them competitor in World wide. The basic principle of production inside the company is high-quality manual work, so there is no robot or automatic workplace. All welds, bends, coatings and assembly are the work of local skilled workers. As proof of quality and effort to do things thoroughly we hold ISO certificate. We are continue to get adapt modern age requirements.

We invite you to discover that potential.



SINGLE AXLE TRAILERS

- Between 1 Ton And 8 Tons
- Loading Capacity
- Central Locking System
- Powder Coating
- Netting Additional Options
- 12 V Electrical System
- Hydraulic / Pneumatic Brake Options
- Grain Discharge Hole
- 40 Km / H Speed
- Upn Chassis
- Therree Side Tipping
- Parking Brake



Our axles made by ST-52 material for long term using. Hydraulic brake is standart for all models. Users/partners have pneumatic barake option with one or double line. Sideboards is opening from top to bottom with basic model. Fonctional sideboards let you Central Locking System. Sideboards can open bottom&top with this option. 12v Electrical system designed for traffic regulations. This system include 7 pin plug, plate lamb and tail light. Users can add side marker light, head lamb and working light option.

Our product range starts with single axle 1 ton trailer. We can serve single axle trailer up to 8 tons with Back,Left,Right and Three side tipping. It is designed for transport of any materials used in agriculture, in the municipal sector, in fruit growing and other purposes. Chassis powered by UPN profile and leaf spring suspension for maximum transport performance.

|                   | 2,5 TON    | 3,5 TON    | 4 TON        | 4 TON        | 5 TON        | 5 TON        | 6 TON        | 6 TON       | 8 TON     |
|-------------------|------------|------------|--------------|--------------|--------------|--------------|--------------|-------------|-----------|
| Loading Capacity  | 2.500 Kg   | 3.500 Kg   | 4.000 Kg     | 4.000 Kg     | 5.000 Kg     | 5.000 Kg     | 6.000 Kg     | 6.000 Kg    | 8.000 Kg  |
| Volume            | 2,5 m³     | 3,7 m³     | 4,3 m³       | 4,7 m³       | 5,0 m³       | 5,6 m³       | 6,2 m³       | 7.2 m³      | 9,6 m³    |
| Total Lenght      | 4.000      | 4.300      | 4.300        | 4.600        | 4.600        | 4.800        | 4.800        | 5.100       | 5.100     |
| Total Width       | 1.850      | 2.050      | 2.050        | 2.050        | 2.050        | 2.150        | 2.250        | 2.250       | 2.450     |
| Platform Lenght   | 2.700      | 3.000      | 3.000        | 3.300        | 3.300        | 3.500        | 3.500        | 3.800       | 3.800     |
| Platform Width    | 1.700      | 1.900      | 1.900        | 1.900        | 1.900        | 2.000        | 2.100        | 2.100       | 2.300     |
| Sidebords Height  | 300        | 400        | 400          | 450          | 450          | 450          | 500          | 500         | 600       |
| Additional Height | 250        | 250        | 350          | 300          | 300          | 300          | 350          | 400         | 500       |
| Tyres             | 10/75-15,3 | 10/75-15,3 | 11,5/80-15,3 | 11,5/80-15,3 | 11,5/80-15,3 | 12,5/80-15,3 | 12,5/80-15,3 | 400/60-15,5 | 500/50-17 |





## DETAYLAR



## DOUBLE AXLE TRAILERS



All traffic regulations regarding braking, electric, signaling and reflectors are suitable to use it on public roads. Trailer have competence for connect second trailer with hydraulic, pneumatic, electric connection components. All our products produced According to Machinery Directive 167/2013 / EC

Double axle Trailers loading capacities are between 4 tons and 18 tons. And serve many options to users for make their job easier. Best quality and that across the range. Double axle trailer have 2,5 mm sideboards 4 mm thickness & rainforced floor. Two axle suspension is excellent for agricultural and municipal transport. Safe and comfortable use of the trailer is ensured by rear wheels fenders, wheel chocks and spare wheel placed in a basket under the trailer. Standard rear grain chute allows to fit grain flange or screw conveyor for easy unloading of grain. Additional equipment allow the trailer to fit your needs, and provide the opportunity to choose the optimal version of the trailer at the best price.



|                   | 4 TON        | 5 TON        | 6 TON        | 8 TON        | 10 TON      | 12 TON      | 15 TON    | 18 TON      |
|-------------------|--------------|--------------|--------------|--------------|-------------|-------------|-----------|-------------|
| Loading Capacity  | 4.000 Kg     | 5.000 Kg     | 6.000 Kg     | 8.000 Kg     | 10.000 Kg   | 12.000 Kg   | 15.000 Kg | 18.000 Kg   |
| Volume            | 6,4 m³       | 7,6 m³       | 8,8 m³       | 9,8 m³       | 11,3 m³     | 14,6 m³     | 16,1 m³   | 21,1 m³     |
| Total Lenght      | 6.200        | 6.200        | 6.200        | 6.450        | 6.700       | 6.950       | 7.200     | 7.700       |
| Total Width       | 2.150        | 2.150        | 2.150        | 2.250        | 2.250       | 2.350       | 2.450     | 2.550       |
| Platform Lenght   | 4.000        | 4.000        | 4.000        | 4.250        | 4.500       | 4.750       | 5.000     | 5.500       |
| Platform Width    | 2.000        | 2.000        | 2.000        | 2.100        | 2.100       | 2.200       | 2.300     | 2.400       |
| Sideboards Height | 500          | 600          | 600          | 600          | 600         | 700         | 700       | 800         |
| Additional Height | 500          | 350          | 500          | 500          | 600         | 700         | 700       | 800         |
| Tyres             | 11,5/80-15,3 | 11,5/80-15,3 | 12,5/80-15,3 | 12,5/80-15,3 | 400/60-15,5 | 400/60-15,5 | 500/50-17 | 385/65-22,5 |





TANDEM AXLE

Here is the most popular Trailers for unflat fields. This series has scale axle system and strong rigid drawbar for maximum transport performance. Perfect axle position and support leg loading capacity gives you extra permissible loading capacity. The trailer is designed as a tandem which makes maneuvering easy. Free steering back axle options makes your job easier during maneuvering. All traffic regulations regarding to bumper, signaling, reflectors, brake, desing are suitable for public roads. Tandem axle Trailers have same options with double axle trailer like;

- Fonctional sideboards
- 2nd trailer connectors
- Rolling Tent
- Automatic towing hitch
- Plastic Tool Box
- Spare Tyre
- Holder
- Lighting Accessories
- Grain Discharge Window
- Grain Discharge System



|                   | 6 TON       | 8 TON       | 10 TON      | 12 TON    | 14 TON    | 15 TON    | 18 TON      |
|-------------------|-------------|-------------|-------------|-----------|-----------|-----------|-------------|
| Loading Capacity  | 6.000 Kg    | 8.000 Kg    | 10.000 Kg   | 12.000 Kg | 14.000 Kg | 15.000 Kg | 18.000 Kg   |
| Volume            | 10.6 m³     | 11.2 m³     | 11.9 m³     | 14.8 m³   | 18.4 m³   | 19.1 m³   | 22.1 m³     |
| Total Lenght      | 5.500       | 5.750       | 6.000       | 6.300     | 6.500     | 6.700     | 7.500       |
| Total Width       | 2.350       | 2.350       | 2.350       | 2.350     | 2.450     | 2.450     | 2.450       |
| Platform Lenght   | 4.000       | 4.250       | 4.500       | 4.800     | 5.000     | 5.200     | 6.000       |
| Platform Width    | 2.200       | 2.200       | 2.200       | 2.200     | 2.300     | 2.300     | 2.300       |
| Sidebords Height  | 600         | 600         | 600         | 700       | 800       | 800       | 800         |
| Additional Height | 600         | 600         | 600         | 700       | 800       | 800       | 800         |
| Tyres             | 400/60-15,5 | 400/60-15,5 | 400/60-15,5 | 500/50-17 | 500/50-17 | 500/50-17 | 600/50-22.5 |





|                   | 18 TON      | 24 TON      |
|-------------------|-------------|-------------|
| Loading Capacity  | 18.000 Kg   | 24.000 Kg   |
| Volume            | 22,1 m³     | 26,9 m³     |
| Total Lenght      | 8.200       | 9.200       |
| Total Width       | 2.450       | 2.550       |
| Platform Lenght   | 6.000       | 7.000       |
| Platform Width    | 2.300       | 2.400       |
| Sidebords Height  | 800         | 800         |
| Additional Height | 800         | 800         |
| Tyres             | 400/60-15,5 | 385/65-22,5 |



|                   | 18 TON      | 24 TON    |
|-------------------|-------------|-----------|
| Loading Capacity  | 18.000 Kg   | 24.000 Kg |
| Volume            | 22,1 m³     | 26,9 m³   |
| Total Lenght      | 8.200       | 9.200     |
| Total Width       | 2.450       | 2.550     |
| Platform Lenght   | 6.000       | 7.000     |
| Platform Width    | 2.300       | 2.400     |
| Sidebords Height  | 800         | 800       |
| Additional Height | 800         | 800       |
| Tyres             | 400/60-15,5 | 500/50-17 |

For big farmers, for big fields, for hard Works solutions. Three axles Trailers. 18 and 24 Tons Loading capacities. Heavy duty capacity construction for chassis, axle and turn table or drawbar. It can be used to transport agricultural crops and thanks to the width it is adapted for the carrying pallet. Tires and axles are designed to transport on roads for long distances. Central locking system for fonctional sideboards allow the trailer to be operated efficiently of by one person. The chief asset of Palazoglu trailers is high leaktightness of bodies that allows transportation of loose materials without any further packing.





CARGO SERIES



|                   | Single Axle |             |             |           | Tandem Axle  |             |             |             |           |             | Tridem Axle |
|-------------------|-------------|-------------|-------------|-----------|--------------|-------------|-------------|-------------|-----------|-------------|-------------|
|                   | 4 TON       | 5 TON       | 6 TON       | 8 TON     | 6 TON        | 8 TON       | 10 TON      | 12 TON      | 15 TON    | 18 TON      | 28 TON      |
| Loading Capacity  | 4.000 Kg    | 5.000 Kg    | 6.000 Kg    | 8.000 Kg  | 6.000 Kg     | 8.000 Kg    | 10.000 Kg   | 12.000 Kg   | 15.000 Kg | 18.000 Kg   | 28.000 Kg   |
| Volume            | 4.6 m³      | 5.6 m³      | 7.0 m³      | 7.2 m³    | 10.6m³       | 11.2 m³     | 11.9 m³     | 12.7 m³     | 13.8 m³   | 25.1 m³     | 35.0 m³     |
| Total Lenght      | 4.500       | 5.000       | 5.200       | 5.300     | 5.500        | 5.750       | 6.000       | 6.300       | 6.500     | 7.500       | 9.500       |
| Total Width       | 2.050       | 2.150       | 2.250       | 2.250     | 2.350        | 2.350       | 2.350       | 2.350       | 2.450     | 2.350       | 2.400       |
| Platform Lenght   | 3.000       | 3.500       | 3.700       | 3.800     | 4.000        | 4.250       | 4.500       | 4.800       | 5.000     | 6.000       | 8.000       |
| Platform Width    | 1.900       | 2.000       | 2.100       | 2.100     | 2.200        | 2.200       | 2.200       | 2.200       | 2.300     | 2.200       | 2.300       |
| Sidebords Height  | 800         | 800         | 900         | 900       | 1.200        | 1.200       | 1.200       | 1.200       | 1.200     | 1.300       | 1.300       |
| Additional Height |             |             |             |           |              |             |             |             |           | 600         | 600         |
| Tyres             | 12/80-15,3  | 12,5/80-5,3 | 400/60-15,5 | 500/50-17 | 12,5/80-15,3 | 400/60-15,5 | 400/60-15,5 | 400/60-15,5 | 500/50-17 | 600/50-22,5 | 600/50-22,5 |

They are suitable for seeds, fertiliser, harvest maize, wheat as well as for manure or compost transport. Single-purpose rear tipping semitrailers for a wide range of applications, available in single, tandem or tridem chassis options. The vehicles partially load the tractor by the drawbar. Equipped with telescopic hydro cylinder. Pneumatic brake system or hydraulically also make this trailer suits to all tractors. Such suspension give this trailer best performance for any surface. The trailer is characterized by a stable and universal construction with a tight loading box with a hydraulically opened rear tailgate. The chassis frame is also adapted for mounting the hydraulic drawbar with variable height adjustment.

4 mm designed box was created for use in difficult terrain conditions, especially useful in the implementation of large road projects, in gravel pits for the transport of loose materials: gravel, sand, rocks, stones, or debris. The dumper works in a set with the tractor.





Universal spreader of organic fertilisers works on the principle of a floor conveyor, double vertical milling beaters and spreading tables. The drive of the floor speed adjustable conveyor is provided by a hydraulic motor. Conveyor designed from 14.50 Chain and strong sprocket. Cardan shaft then drives the milling rollers and 25 mm spreader discs.

A tight guillotine door, which can be adjusted on the full height of the beaters, can be installed. It avoids load losses during transport and makes it possible to regulate the flow while spreading.

|                   | Single Axle  |             |           | Tandem Axle |           |           |             |             |
|-------------------|--------------|-------------|-----------|-------------|-----------|-----------|-------------|-------------|
|                   | 4 TON        | 5 TON       | 8 TON     | 10 TON      | 12 TON    | 15 TON    | 18 TON      | 22 TON      |
| Loading Capacity  | 4.000 Kg     | 5.000 Kg    | 8.000 Kg  | 10.000 Kg   | 12.000 Kg | 15.000 Kg | 18.000 Kg   | 22.000 Kg   |
| Volume            | 2.4 m³       | 3.4 m³      | 6.2 m³    | 8.2 m³      | 9.9 m³    | 11.7 m³   | 15.0 m³     | 18.0 m³     |
| Total Lenght      | 5.400        | 5.400       | 5.700     | 6.450       | 6.700     | 6.950     | 7.200       | 7.800       |
| Total Width       | 1.750        | 1.750       | 2.000     | 2.000       | 2.000     | 2.000     | 2.400       | 2.400       |
| Platform Lenght   | 3.200        | 3.200       | 3.500     | 4.250       | 4.500     | 4.750     | 5.000       | 5.600       |
| Platform Width    | 1.500        | 1.500       | 1.750     | 1.750       | 1.750     | 1.750     | 2.150       | 2.150       |
| Sidebords Height  | 500          | 700         | 900       | 1000        | 1.150     | 1.300     | 1.300       | 1.400       |
| Additional Height |              |             | 100 Wood  | 100 Wood    | 100 Wood  | 100 Wood  | 100 Wood    | 100 Wood    |
| Tyres             | 12,5/80-15,3 | 400/60-15,5 | 500/50-17 | 400/60-15,5 | 500/50-17 | 500/50-17 | 500/60-22,5 | 600/50-22,5 |





The most important innovation in the design of the bale trailer, unlike in previous models, are hydraulically lifted side walls to protect the transported cargo. The large loading surface of the trailer and its optimal load capacity makes it possible to transport a wide range of different materials and to use the trailer not only in agriculture



Hydraulic side walls can flex up to 3 meters nad can up to 90°. 4 mm platform and strong design created for hard conditions.

|                   | Double Axle |             |           |             | Three Axle |             |
|-------------------|-------------|-------------|-----------|-------------|------------|-------------|
|                   | 8 TON       | 10 TON      | 14 TON    | 16 TON      | 20 TON     | 24 TON      |
| Loading Capacity  | 8.000 Kg    | 10.000 Kg   | 14.000 Kg | 16.000 Kg   | 20.000 Kg  | 24.000 Kg   |
| Volume            | 14.4 m³     | 19.2 m³     | 19.2 m³   | 20.2 m³     | 8.2 m³     | 9.9 m³      |
| Total Lenght      | 8.200       | 10.200      | 10.200    | 10.600      | 12.200     | 14.200      |
| Total Width       | 2.400       | 2.400       | 2.400     | 2.400       | 2.400      | 12.000      |
| Platform Lenght   | 6.000       | 8.000       | 8.000     | 8.400       | 10.000     | 10.000      |
| Platform Width    | 2.400       | 2.400       | 2.400     | 2.400       | 2.400      | 2.400       |
| Sidebords Height  | -           | -           | -         | -           | -          | -           |
| Additional Height | -           | -           | -         | -           | -          | -           |
| Tyres             | 12/80-15,3  | 400/60-15,5 | 500/50-17 | 435/50-19,5 | 500/50-17  | 435/50-19,5 |

PLATFORM TRAILER



Trailer primarily designed for the transport of agricultural materials such as straw, hay, haylage in bales The design of the load platform enables easy loading and unloading bails.Platform trailers are characterised by simplicity and usability which is due to their strong construction, three different support positions, and a large loading surface. Allows the transportation of agricultural bales, square bales, euro pallets, boxes, in forestry sawn wood, wood logs, and various long materials as well as a wide variety of different materials including packed products used in construction, industrial, municipal, commercial, etc. Axles designed for long distance public roads. Platform trailer allows you to connect second platform trailer. You can find your solution in our wide range of platform trailer procuts. They are between 2 axle 6 meters lenght and 3 axles 12,5 meters lenght.






Long platform and high sideboards created for cotton transport solutions. Sideboards made by perforated sheet to make trailer lighter. This trailer has 2 option for unloading.

- Tipping, high angle of left or right side tipping help you to unload all cotton easily.
- Conveyor system, this is the most popular unloading type for cotton trailers. You do not need to dump your trailer. Conveyor system Works with hydraulic hydromotor. Hydromotor takes power from tractor hydraulic connector. You do not need any other equipment for discharging.

COTTON TRAILERS

|                   | 6 TON       | 10 TON      | 10 TON      |
|-------------------|-------------|-------------|-------------|
| Loading Capacity  | 6.000 Kg    | 10.000 Kg   | 10.000 Kg   |
| Discharging Style | Tipping     | Tipping     | Conveyor    |
| Loading Volume    | 34.5 m³     | 46.0 m³     | 50.0 m³     |
| Total Lenght      | 8.200       | 10.200      | 10.200      |
| Total Width       | 2.400       | 2.400       | 2.600       |
| Platform Lenght   | 6.000       | 8.000       | 8.000       |
| Platform Width    | 2.300       | 2.300       | 2.500       |
| Sidebords Height  | 2.500       | 2.500       | 2.500       |
| Additional Height |             |             |             |
| Tyres             | 400/60-15,5 | 400/60-15,5 | 400/60-15,5 |

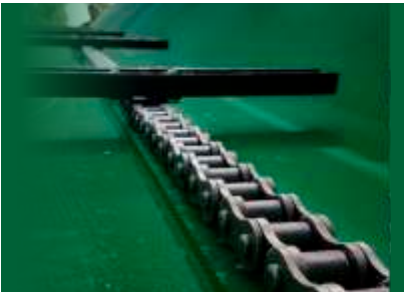

SLAGE TRAILER

Designed on a particularly sturdy basis, the silage trailer is fitted with suspension, which makes it very stable and comfortable to drive, both in the fields and on the road. The trailer is unloaded easily and without blocking thanks to the optional rear or side door with wide opening angle, operated by two double-acting hydraulic rams. A locking device on spring makes sure the door is perfectly closed and avoids any unexpected opening during transportation.





## ANIMAL TRANSPORT TRAILER

Spacious vehicles for transporting your cattle – beef cattle, pigs, goats or sheep. Vehicles are designed as semitrailers with getting in from the rear side from the ground or the ramp. The interior space is divided by partitions for easier and safer loading and transport. There is a hydraulic option for rear door. 4.5 meters length allows you 5 tons loading. For more animals you can find 8 tons in our product range with 6 meters length.



## WOOD CARRYING TRAILER

We offer various work machines models designed to meet various needs and pressures. Individual models are available in different types, so we can provide full products for a large number of customer demands. The machines are available in conventional standard equipment and optional equipment. With these choices, we diversified our offer of quality forestry machines for the benefit of our customers. Optional equipment options help you find the product that best fits your needs. Forestry trailer can be customized easily. Also you can choose it with optional Crane.





# SLURRY TANK

Slurry tanks are an exceptionally durable constructions, high resistance to corrosion and multifunctionality are just some of the advantages of our slurry tanks. Customers can choose between 4 Tons and 20 Tons, made of steel with improved strength properties. The construction of the lower frame ensures that the container does not transfer load as is the case with cars self-supporting. Tanks have an inner partition 'breakwater', the aim of which is to prevent a substance from waving. Hot galvanized deep, galvanized sheet and epoxy paint are options for tanks. Slurry tanks have 360m3/h capacity vacuum pump for basic model. Back spreader is hyraulic valfed spoon type and spread to 12 meters width.



- There are 2 option for fertilizing.
- Hydraulic control 360° turnable top spreader ■
- Under soil injection with 7 injector ■

Battioni Pagani  
pump is optional  
for all models.



Battioni®  
Pagani  
Pumpe



|                      | Single Axle  |             |             | Tandem Axle  |              |              |            |            |             |             |
|----------------------|--------------|-------------|-------------|--------------|--------------|--------------|------------|------------|-------------|-------------|
|                      | 4 TON        | 5 TON       | 6 TON       | 6 TON        | 8 TON        | 10 TON       | 12 TON     | 15 TON     | 18 TON      | 20 TON      |
| Loading Capacity     | 4.000 Kg     | 5.000 Kg    | 6.000 Kg    | 6.000 Kg     | 8.000 Kg     | 10.000 Kg    | 12.000 Kg  | 15.000 Kg  | 18.000 Kg   | 20.000 Kg   |
| Tank Thickness       | 4 mm         | 4 mm        | 4 mm        | 4 mm         | 4 mm         | 4 mm         | 4 mm       | 6 mm       | 6 mm        | 6 mm        |
| Pump                 | 360 m3/h     | 360 m3/h    | 360 m3/h    | 360 m3/h     | 360 m3/h     | 360 m3/h     | 360 m3/h   | 360 m3/h   | 360 m3/h    | 360 m3/h    |
| Grada Pump           | Applicable   | Applicable  | Applicable  | Applicable   | Applicable   | Applicable   | Applicable | Applicable | Applicable  | Applicable  |
| Hyraulic Valve       | Standart     | Standart    | Standart    | Standart     | Standart     | Standart     | Standart   | Standart   | Standart    | Standart    |
| Under Soil Injection | Applicable   | Applicable  | Applicable  | Applicable   | Applicable   | Applicable   | Applicable | Applicable | Applicable  | Applicable  |
| Tyres                | 12,5/80-15,3 | 400/60-15,5 | 400/60-15,5 | 11,5/80-15,3 | 11,5/80-15,3 | 12,5/80-15,3 | 500/50-17  | 500/50-17  | 600/50-22,5 | 600/50-22,5 |





## TANKERS

Tankers are universal. You can apply equipments to make them fire tank or fuel tank.



## WATER TANKS

Water tanks are solution for territories which have irrigation and water problems. 2" centrifugal pump allows you blow water from a water supply and squirt to target. 2" centrifugal pump Works with tractor tail shaft. PTO shaft is standart equipment to take power from tail shaft. Motopomp is stronger than basic pump for who needs Professional support. Gasoline and fuel motopumps are with you when you do not have tail shaft. Tank is galvanized designed for corrosion. Manual pump, extra valves, irrigation bar is some of options for that product.

## FUEL TANKS

Another solution with tanks. There are some equipments on basic water tank. You do not need 2 cetrifugal pump because on fuel tanks you have fuel pump. You can check how much did you filled from counter display. You have options for fuel pump and counter. 12v 24v 220v and pumping capacities. Standart pump allows you 36 L / m.






## FIRE TANKS

Fire tanks are almost same with water tanks except some equipment for fire fighting. We apply pressure fire nozzle, 20 meters pressure cloth hose, fire box and 360° turning water monitor. Pump is standart 2" centrifugal pump and Works with PTO shaft or motopomp.



|                  | Single Axle    |                |                |                |                |                | Tandem Axle    |                |                |                |                |                |
|------------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|
|                  | 2 TON          | 2,5 TON        | 3 TON          | 5 TON          | 6 TON          | 8 TON          | 6 TON          | 7 TON          | 8 TON          | 10 TON         | 15 TON         | 20 TON         |
| Loading Capacity | 2.000 Kg       | 2.500 Kg       | 3.000 Kg       | 5.000 Kg       | 6.000 Kg       | 8.000 Kg       | 6.000 Kg       | 7.000 Kg       | 8.000 Kg       | 10.000 Kg      | 15.000 Kg      | 20.000 Kg      |
| Tank Thickness   | 2,5 mm         | 2,5 mm         | 2,5 mm         | 2,5 mm         | 2,5 mm         | 2,5 mm         | 2,5 mm         | 2,5 mm         | 2,5 mm         | 4 mm           | 4 mm           | 6 mm           |
| Pump             | 2" Centrifugal | 2" Centrifugal | 2" Centrifugal | 2" Centrifugal | 2" Centrifugal | 2" Centrifugal | 2" Centrifugal | 2" Centrifugal | 2" Centrifugal | 2" Centrifugal | 2" Centrifugal | 2" Centrifugal |
| Motopomp         | Applicable     | Applicable     | Applicable     | Applicable     | Applicable     | Applicable     | Applicable     | Applicable     | Applicable     | Applicable     | Applicable     | Applicable     |
| PTO Shaft        | Standart       | Standart       | Standart       | Standart       | Standart       | Standart       | Standart       | Standart       | Standart       | Standart       | Standart       | Standart       |
| Tyres            | 10/80-12       | 750x16         | 750x16         | 900x16         | 900x16         | 12,5/80-15,3   | 11,5/80-15,3   | 11,5/80-15,3   | 12,5/80-15,3   | 400/60-15,3    | 500/50-17      | 600/50-22,5    |



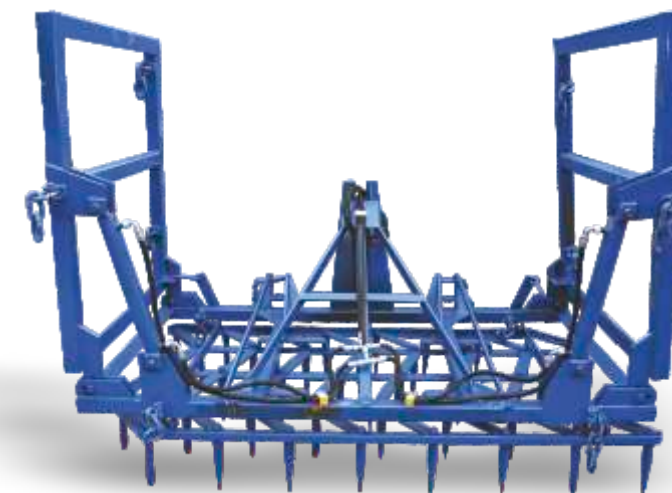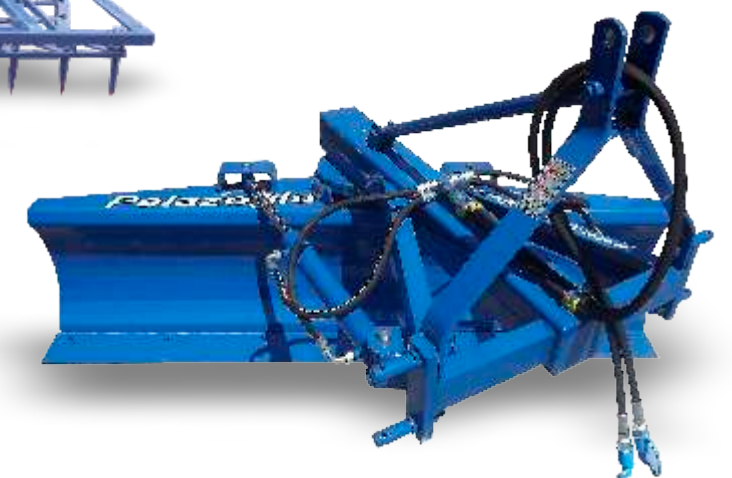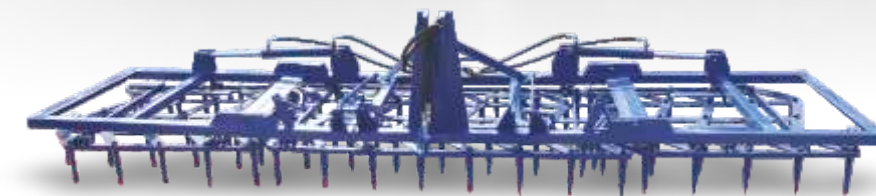

Palazoglu can customize Trailers regarding to users requests. There are many type of industrial Trailers in our products range also.

We can offer offer harrow and levelling shovel as a our production. Our harrows cogs are 1040 quality steel and ready for hard conditions. Hydraulic bending is option for users. Harrows are between 24 cogs and 120 cogs.